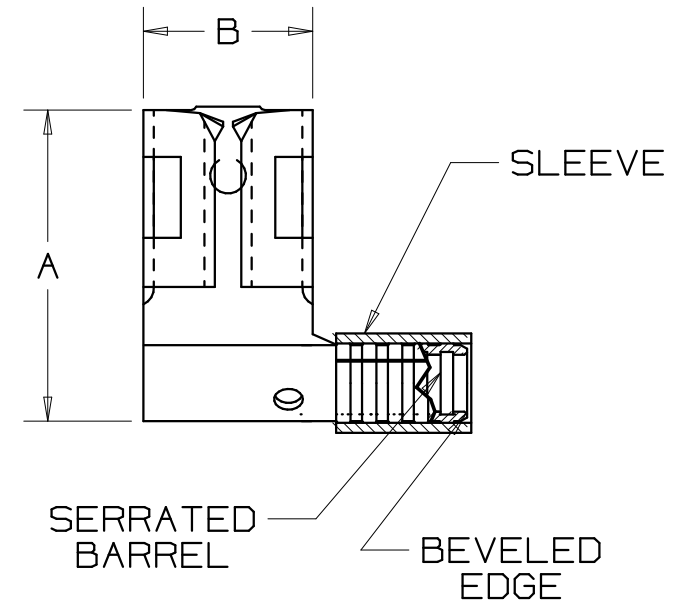
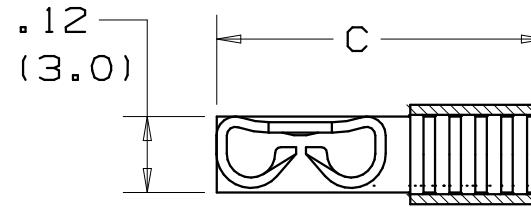


| PART NUMBER | TAB SIZE                      | WIRE RANGE<br>AWG | DIMENSIONS in. |              |               |
|-------------|-------------------------------|-------------------|----------------|--------------|---------------|
|             |                               |                   | A $\pm .02$    | B $\pm .01$  | C $\pm .03$   |
| DR18-205    | OR .205 X .032<br>.187 X .032 | 22-18             | .53<br>(13.5)  | .25<br>(6.4) | .54<br>(13.7) |
| DR14-205    | OR .205 X .032<br>.187 X .032 | 16-14             | .55<br>(14.0)  | .25<br>(6.4) | .54<br>(13.7) |
| DR18-206    | OR .205 X .020<br>.187 X .020 | 22-18             | .53<br>(13.5)  | .25<br>(6.4) | .54<br>(13.7) |
| DR14-206    | OR .205 X .020<br>.187 X .020 | 16-14             | .55<br>(14.0)  | .25<br>(6.4) | .54<br>(13.7) |

## NOTES:

- UL LISTED AND CSA CERTIFIED FOR:  
A. 302° F (150° C) MAX. TEMP. RATING  
B. STRANDED COPPER WIRE ONLY
- MATERIAL:  
A. STAMPING - .018" (0.46) THK BRASS,  
TIN PLATED  
B. SLEEVE - BRASS, TIN PLATED
- PACKAGE QTY: STD. PKG. - C = 100  
BULK PKG. - M = 1000
- FIRST INSERTION FORCE - 12 LB. (53N) MAX  
FIRST WITHDRAWAL FORCE - 12 LB. (53N) MAX  
6 LB. (27N) MIN
- DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
- INSTALLATION TOOLS:  
A. UL LISTED AND CSA CERTIFIED: CT-100,  
CT-200, CT-570, CT-1570  
B. PANDUIT APPROVED: CT-160
- WIRE STRIP LENGTH:  $9/32 \pm 1/32$  (7.1  $\pm 0.8$ )

LISTED  
20H3  
E78522CERTIFIED  
LR31212

|     |       |     |     |                               |         |      |     |     |                                                                                                                                                                    |       |               |                       |  |
|-----|-------|-----|-----|-------------------------------|---------|------|-----|-----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|---------------|-----------------------|--|
| 6   | 7/06  | DAW | DAW | .12 HEIGHT OVER CURLS WAS .11 | TR00146 |      |     |     | A41328_06                                                                                                                                                          |       |               |                       |  |
| 5   | 1/01  | RM  |     | FILESPEC WAS N41328AA_PCD_04  | 08925   | JAC  | CCH |     | <div><div>PANDUIT</div><div>CORP.</div><div>TINLEY PARK, ILLINOIS</div></div> <div>NON-INSULATED, SLEEVED RIGHT ANGLE<br/>FEMALE DISCONNECT .205/.206 SERIES</div> |       |               |                       |  |
| 4   | 4-98  | ED  |     | ADDED SLOTS TO DRWG.          | 06755   |      |     |     |                                                                                                                                                                    |       |               |                       |  |
| 3   | 12-95 | ED  |     | REV.S TO NOTES AND DRWG.      | 03834   | LA   | TFK |     |                                                                                                                                                                    |       |               |                       |  |
| 2   | 8-88  | DW  |     | REDRAWN WITH REVISIONS        |         |      | JRB |     |                                                                                                                                                                    |       |               |                       |  |
| REV | DATE  | BY  | CHK | DESCRIPTION                   | ECN #   | CUST | PM  | APP | DRAWN BY<br>DAW                                                                                                                                                    | CHK'D | SCALE<br>NONE | DRAWING NO.<br>A41328 |  |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[DR18-205-C](#) [DR18-206-M](#) [DR14-206-C](#) [DR14-205-C](#) [DR18-206-C](#)