


REV		REVISIONS			
A		SYM	DESCRIPTION	DATE	APPROVED
		NC	NEW RELEASE PER E.O. A14643	12/5/94	RDR
		A	REVISED PER E.O. P16752	7-20-00	RDR

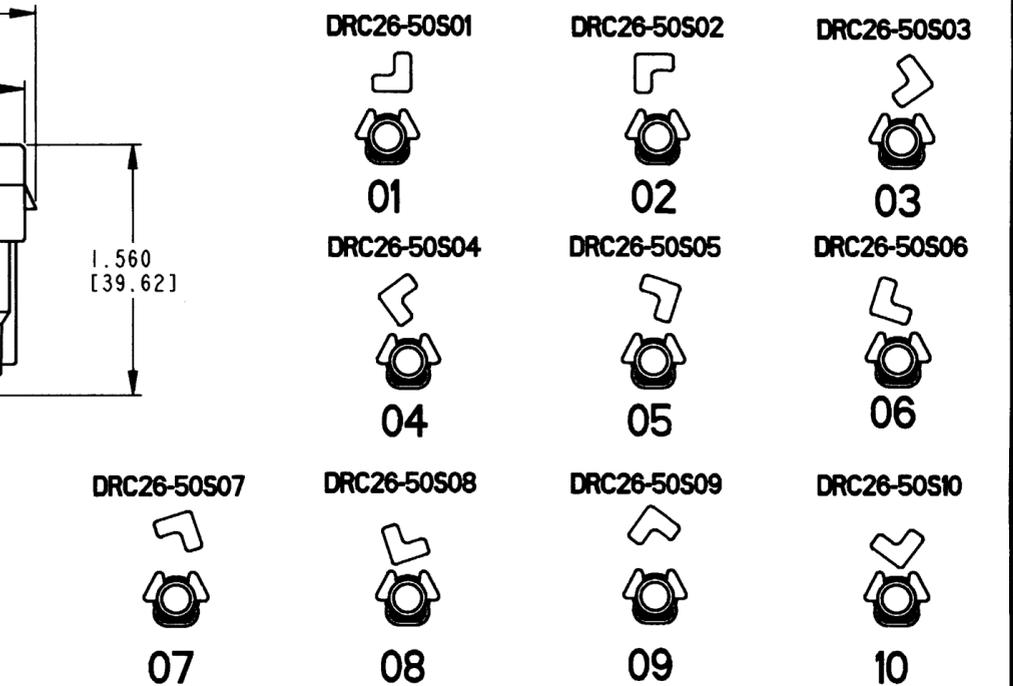

5. RECOMMENDED RETAINING BOLT TORQUE: 25-28 IN-LB [2.82-3.16NM]
4. THIS CONNECTOR WILL ACCOMMODATE THE FOLLOWING:

CONTACT SIZE	MIN. O.D.	MAX. O.D.	WIRE GAUGE RANGE REF ONLY
20	.040 [1.016]	.095 [2.413]	16 THRU 20 [1.00-.50mm ²]

3. PLUG IS SUPPLIED WITH DUST CAP. (NOT SHOWN)
2. DIMENSION TOLERANCE: ±.025 [.64]
- NOTES: 1. DIMENSIONS ARE IN INCHES [mm].

8. MATERIAL: HOUSING: PLASTIC (BLACK); BOLT: STAINLESS STEEL; CLIP: STEEL.
7. THIS PLUG MATES WITH 09D41107L01 THRU 10-**** AND DRC20-50P01 THRU 10-**** RECEPTACLE. (**** = ALL MODIFICATIONS)
6. FOR CONTACT AND WIRE PERFORMANCE AND APPLICATION CHARACTERISTICS SEE ENVELOPE DRAWING 0425-015-0000.

SIGNATURE & DATE		PLUG 50 CONTACTS, SIZE 20 DRC SERIES	CP EP019	MATL. CODE
DR	V. TOMSA 10/11/94		The Deutsch Company DEUTSCH I.P.D. 3850 INDUSTRIAL AVE. HEMET, CALIF. 92545	
CHK	D. Meyer 7/20/00	ENVELOPE	DRC26-50S**	
PE	D. Meyer 7/20/00		DWG SIZE	CODE 11139
APPD	R. Reed 7-20-00			
SCALE	NONE WT			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[DRC26-50S07](#)