

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

TERMINAL IDENTIFICATION FOR DR SERIES ONLY
(VIEWED FROM BOTTOM OF SWITCH)

0810

0C00

0240

0810

0C00

0240

ACTUATOR
LOCATION

10—POSITION, BCDSEE NOTE 2

POS	0	1	2	3	4	5	6	7	8	9
C	X	X	X	X	X	X	X	X	X	X
1		X		X		X		X		X
2			X	X			X	X		
4					X	X	X	X		
8									X	X

16—POSITION, HEXADECIMALSEE NOTE 3

POS	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
C	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1		X		X		X		X		X		X		X		X
2			X	X			X	X			X	X			X	X
4					X	X	X	X					X	X	X	X
8									X	X	X	X	X	X	X	X

10 POSITION,
BCD COMPLEMENTSEE NOTE 4

POS	0	1	2	3	4	5	6	7	8	9
C	X	X	X	X	X	X	X	X	X	X
1	X		X		X		X		X	
2	X	X			X	X			X	X
4	X	X	X	X					X	X
8	X	X	X	X	X	X	X	X		

16—POSITION,
HEXADECIMAL COMPLEMENTSEE NOTE 5

POS	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
C	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1	X		X		X		X		X		X		X		X	
2	X	X			X	X			X	X			X	X		
4	X	X	X	X					X	X	X	X				
8	X	X	X	X	X	X	X	X								

HOW TO ORDER

D

R

I

SERIES
ROTARY DIPS (BLACK CASE)

ACTUATOR STYLE
M= MINI PLASTIC SHAFT
W= WHEEL
S= METAL SHAFT

CIRCUIT TYPES
10= BC DECIMAL
10C= BCD COMPLEMENT
16= HEXADECIMAL
16C= HEXADECIMAL COMPLEMENT

SPECIFICATIONS:

MATERIAL:
FRAME & CASE: PPS UL94V–0, BLACK
ROTOR,PPS UL94V–0, COLOR SEE P/N TABLE
FIXED CONTACT TERMINAL: COPPER ALLOY,GOLD FLASH OVER NICKEL PLATE
MOVING CONTACT:COPPER ALLOY,GOLD FLASH OVER NICKEL PLATE
BALL SUPPORT PLATE: COPPER ALLOY
BALL: STAINLESS STEEL
DETENT SPRING: STAINLESS STEEL.
BUSHING (DRS): ZINC DIE CAST.
SHAFT (DRS): COPPER ALLOY–NICKEL PLATE

ELECTRICAL:
CONTACT RATING: 0.4 VA @ 20V DC OR PEAK AC
INITIAL CONTACT RESISTANCE: 50 MILLIOHMS MAX.
INSULATION RESISTANCE: 1,000 MEGOHMS @ 100V DC.
DIELECTRIC STRENGTH: 300V AC
LIFE EXPECTANCY: 10,000 ROTATIONS

MECHANICAL:
OPERATING FORCE: 13.88 OZF.IN. MAX

ENVIRONMENTAL:
OPERATING TEMPERATURE: –30 TO +85 DEGREES C
STORAGE TEMPERATURE: –45 TO +100 DEGREES C
RESISTANCE TO SOLDER HEAT–PER 109–202, COND B (THRU–HOLE)
SOLDERABILITY– PER JIS C 0050 & JIS C 0053

NOTES:

1. COMMON TERMINALS ARE CONNECTED INTERNALLY.

2. RED ROTOR WITH WHITE PRINTING ON TOP AND SIDE OF SWITCH. "S" STYLES HAVE NOT PRINTING ON TOP.

3. BLACK ROTOR WITH WHITE PRINTING ON TOP AND SIDE OF SWITCH. "S" STYLES HAVE NO PRINTING ON TOP.

4. ORANGE ROTOR WITH WHITE PRINTING ON TOP AND SIDE OF SWITCH EXCEPT FOR THE "W" STYLES, WHICH HAVE BLACK PRINTING ON TOP. "S" STYLES HAVE NO PRINTING ON TOP.

5. WHITE ROTOR WITH WHITE PRINTING ON TOP AND SIDE OF SWITCH EXCEPT FOR THE "W" STYLES, WHICH HAVE BLACK PRINTING ON TOP. "S" STYLE HAVE NO PRINTING ON TOP.

6. ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS)

7. LOCATE 'ALCO' TRADE NAME AND LOT NUMBER MARKING.
LOT NUMBER TO BE MARKED AS FOLLOW:

4F

1ST DIGIT2ND DIGIT

YEAR 1194MONTH 6

MARK WITH PERMANENT WHITE INK.

SEE SHEET 2 FOR DIMENSIONAL SPEC'S

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

0810

0C00

0240

ACTUATOR
LOCATION

10—POSITION, BCDSEE NOTE 2

POS	0	1	2	3	4	5	6	7	8	9
C	X	X	X	X	X	X	X	X	X	X
1		X		X		X		X		X
2			X	X			X	X		
4					X	X	X	X		
8									X	X

16—POSITION, HEXADECIMALSEE NOTE 3

POS	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
C	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1		X		X		X		X		X		X		X		X
2			X	X			X	X			X	X			X	X
4					X	X	X	X					X	X	X	X
8									X	X	X	X	X	X	X	X

10 POSITION,
BCD COMPLEMENTSEE NOTE 4

POS	0	1	2	3	4	5	6	7	8	9
C	X	X	X	X	X	X	X	X	X	X
1	X		X		X		X		X	
2	X	X			X	X			X	X
4	X	X	X	X					X	X
8	X	X	X	X	X	X	X	X		

16—POSITION,
HEXADECIMAL COMPLEMENTSEE NOTE 5

POS	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
C	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1	X		X		X		X		X		X		X		X	
2	X	X			X	X			X	X			X	X		
4	X	X	X	X					X	X	X	X				
8	X	X	X	X	X	X	X	X								

HOW TO ORDER

D

R

I

SERIES
ROTARY DIPS (BLACK CASE)

ACTUATOR STYLE
M= MINI PLASTIC SHAFT
W= WHEEL
S= METAL SHAFT

CIRCUIT TYPES
10= BC DECIMAL
10C= BCD COMPLEMENT
16= HEXADECIMAL
16C= HEXADECIMAL COMPLEMENT

SPECIFICATIONS:

MATERIAL:
FRAME & CASE: PPS UL94V–0, BLACK
ROTOR,PPS UL94V–0, COLOR SEE P/N TABLE
FIXED CONTACT TERMINAL: COPPER ALLOY,GOLD FLASH OVER NICKEL PLATE
MOVING CONTACT:COPPER ALLOY,GOLD FLASH OVER NICKEL PLATE
BALL SUPPORT PLATE: COPPER ALLOY
BALL: STAINLESS STEEL
DETENT SPRING: STAINLESS STEEL.
BUSHING (DRS): ZINC DIE CAST.
SHAFT (DRS): COPPER ALLOY–NICKEL PLATE

ELECTRICAL:
CONTACT RATING: 0.4 VA @ 20V DC OR PEAK AC
INITIAL CONTACT RESISTANCE: 50 MILLIOHMS MAX.
INSULATION RESISTANCE: 1,000 MEGOHMS @ 100V DC.
DIELECTRIC STRENGTH: 300V AC
LIFE EXPECTANCY: 10,000 ROTATIONS

MECHANICAL:
OPERATING FORCE: 13.88 OZF.IN. MAX

ENVIRONMENTAL:
OPERATING TEMPERATURE: –30 TO +85 DEGREES C
STORAGE TEMPERATURE: –45 TO +100 DEGREES C
RESISTANCE TO SOLDER HEAT–PER 109–202, COND B (THRU–HOLE)
SOLDERABILITY– PER JIS C 0050 & JIS C 0053

NOTES:

1. COMMON TERMINALS ARE CONNECTED INTERNALLY.

2. RED ROTOR WITH WHITE PRINTING ON TOP AND SIDE OF SWITCH. "S" STYLES HAVE NOT PRINTING ON TOP.

3. BLACK ROTOR WITH WHITE PRINTING ON TOP AND SIDE OF SWITCH. "S" STYLES HAVE NO PRINTING ON TOP.

4. ORANGE ROTOR WITH WHITE PRINTING ON TOP AND SIDE OF SWITCH EXCEPT FOR THE "W" STYLES, WHICH HAVE BLACK PRINTING ON TOP. "S" STYLES HAVE NO PRINTING ON TOP.

5. WHITE ROTOR WITH WHITE PRINTING ON TOP AND SIDE OF SWITCH EXCEPT FOR THE "W" STYLES, WHICH HAVE BLACK PRINTING ON TOP. "S" STYLE HAVE NO PRINTING ON TOP.

6. ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS)

7. LOCATE 'ALCO' TRADE NAME AND LOT NUMBER MARKING.
LOT NUMBER TO BE MARKED AS FOLLOW:

4F

1ST DIGIT2ND DIGIT

YEAR 1194MONTH 6

MARK WITH PERMANENT WHITE INK.

SEE SHEET 2 FOR DIMENSIONAL SPEC'S

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

0810

0C00

0240

ACTUATOR
LOCATION

10—POSITION, BCDSEE NOTE 2

POS	0	1	2	3	4	5	6	7	8	9
C	X	X	X	X	X	X	X	X	X	X
1		X		X		X		X		X
2			X	X			X	X		
4					X	X	X	X		
8									X	X

16—POSITION, HEXADECIMALSEE NOTE 3

POS	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
C	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1		X		X		X		X		X		X		X		X
2			X	X			X	X			X	X			X	X
4					X	X	X	X					X	X	X	X
8									X	X	X	X	X	X	X	X

10 POSITION,
BCD COMPLEMENTSEE NOTE 4

POS	0	1	2	3	4	5	6	7	8	9
C	X	X	X	X	X	X	X	X	X	X
1	X		X		X		X		X	
2	X	X			X	X			X	X
4	X	X	X	X					X	X
8	X	X	X	X	X	X	X	X		

16—POSITION,
HEXADECIMAL COMPLEMENTSEE NOTE 5

POS	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
C	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1	X		X		X		X		X		X		X		X	
2	X	X			X	X			X	X			X	X		
4	X	X	X	X					X	X	X	X				
8	X	X	X	X	X	X	X	X								

HOW TO ORDER

D

R

I

SERIES
ROTARY DIPS (BLACK CASE)

ACTUATOR STYLE
M= MINI PLASTIC SHAFT
W= WHEEL
S= METAL SHAFT

CIRCUIT TYPES
10= BC DECIMAL
10C= BCD COMPLEMENT
16= HEXADECIMAL
16C= HEXADECIMAL COMPLEMENT

SPECIFICATIONS:

MATERIAL:
FRAME & CASE: PPS UL94V–0, BLACK
ROTOR,PPS UL94V–0, COLOR SEE P/N TABLE
FIXED CONTACT TERMINAL: COPPER ALLOY,GOLD FLASH OVER NICKEL PLATE
MOVING CONTACT:COPPER ALLOY,GOLD FLASH OVER NICKEL PLATE
BALL SUPPORT PLATE: COPPER ALLOY
BALL: STAINLESS STEEL
DETENT SPRING: STAINLESS STEEL.
BUSHING (DRS): ZINC DIE CAST.
SHAFT (DRS): COPPER ALLOY–NICKEL PLATE

ELECTRICAL:
CONTACT RATING: 0.4 VA @ 20V DC OR PEAK AC
INITIAL CONTACT RESISTANCE: 50 MILLIOHMS MAX.
INSULATION RESISTANCE: 1,000 MEGOHMS @ 100V DC.
DIELECTRIC STRENGTH: 300V AC
LIFE EXPECTANCY: 10,000 ROTATIONS

MECHANICAL:
OPERATING FORCE: 13.88 OZF.IN. MAX

ENVIRONMENTAL:
OPERATING TEMPERATURE: –30 TO +85 DEGREES C
STORAGE TEMPERATURE: –45 TO +100 DEGREES C
RESISTANCE TO SOLDER HEAT–PER 109–202, COND B (THRU–HOLE)
SOLDERABILITY– PER JIS C 0050 & JIS C 0053

NOTES:

1. COMMON TERMINALS ARE CONNECTED INTERNALLY.

2. RED ROTOR WITH WHITE PRINTING ON TOP AND SIDE OF SWITCH. "S" STYLES HAVE NOT PRINTING ON TOP.

3. BLACK ROTOR WITH WHITE PRINTING ON TOP AND SIDE OF SWITCH. "S" STYLES HAVE NO PRINTING ON TOP.

4. ORANGE ROTOR WITH WHITE PRINTING ON TOP AND SIDE OF SWITCH EXCEPT FOR THE "W" STYLES, WHICH HAVE BLACK PRINTING ON TOP. "S" STYLES HAVE NO PRINTING ON TOP.

5. WHITE ROTOR WITH WHITE PRINTING ON TOP AND SIDE OF SWITCH EXCEPT FOR THE "W" STYLES, WHICH HAVE BLACK PRINTING ON TOP. "S" STYLE HAVE NO PRINTING ON TOP.

6. ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS)

7. LOCATE 'ALCO' TRADE NAME AND LOT NUMBER MARKING.
LOT NUMBER TO BE MARKED AS FOLLOW:

4F

1ST DIGIT2ND DIGIT

YEAR 1194MONTH 6

MARK WITH PERMANENT WHITE INK.

SEE SHEET 2 FOR DIMENSIONAL SPEC'S

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

0810

0C00

0240

ACTUATOR
LOCATION

10—POSITION, BCDSEE NOTE 2

POS	0	1	2	3	4	5	6	7	8	9
C	X	X	X	X	X	X	X	X	X	X
1		X		X		X		X		X
2			X	X			X	X		
4					X	X	X	X		
8									X	X

16—POSITION, HEXADECIMALSEE NOTE 3

POS	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
C	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1		X		X		X		X		X		X		X		X
2			X	X			X	X			X	X			X	X
4					X	X	X	X					X	X	X	X
8									X	X	X	X	X	X	X	X

10 POSITION,
BCD COMPLEMENTSEE NOTE 4

POS	0	1	2	3	4	5	6	7	8	9
C	X	X	X	X	X	X	X	X	X	X
1	X		X		X		X		X	
2	X	X			X	X			X	X
4	X	X	X	X					X	X
8	X	X	X	X	X	X	X	X		

16—POSITION,
HEXADECIMAL COMPLEMENTSEE NOTE 5

POS	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
C	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1	X		X		X		X		X		X		X		X	
2	X	X			X	X			X	X			X	X		
4	X	X	X	X					X	X	X	X				
8	X	X	X	X	X	X	X	X								

HOW TO ORDER

D

R

I

SERIES
ROTARY DIPS (BLACK CASE)

ACTUATOR STYLE
M= MINI PLASTIC SHAFT
W= WHEEL
S= METAL SHAFT

CIRCUIT TYPES
10= BC DECIMAL
10C= BCD COMPLEMENT
16= HEXADECIMAL
16C= HEXADECIMAL COMPLEMENT

SPECIFICATIONS:

MATERIAL:
FRAME & CASE: PPS UL94V–0, BLACK
ROTOR,PPS UL94V–0, COLOR SEE P/N TABLE
FIXED CONTACT TERMINAL: COPPER ALLOY,GOLD FLASH OVER NICKEL PLATE
MOVING CONTACT:COPPER ALLOY,GOLD FLASH OVER NICKEL PLATE
BALL SUPPORT PLATE: COPPER ALLOY
BALL: STAINLESS STEEL
DETENT SPRING: STAINLESS STEEL.
BUSHING (DRS): ZINC DIE CAST.
SHAFT (DRS): COPPER ALLOY–NICKEL PLATE

ELECTRICAL:
CONTACT RATING: 0.4 VA @ 20V DC OR PEAK AC
INITIAL CONTACT RESISTANCE: 50 MILLIOHMS MAX.
INSULATION RESISTANCE: 1,000 MEGOHMS @ 100V DC.
DIELECTRIC STRENGTH: 300V AC
LIFE EXPECTANCY: 10,000 ROTATIONS

MECHANICAL:
OPERATING FORCE: 13.88 OZF.IN. MAX

ENVIRONMENTAL:
OPERATING TEMPERATURE: –30 TO +85 DEGREES C
STORAGE TEMPERATURE: –45 TO +100 DEGREES C
RESISTANCE TO SOLDER HEAT–PER 109–202, COND B (THRU–HOLE)
SOLDERABILITY– PER JIS C 0050 & JIS C 0053

NOTES:

1. COMMON TERMINALS ARE CONNECTED INTERNALLY.

2. RED ROTOR WITH WHITE PRINTING ON TOP AND SIDE OF SWITCH. "S" STYLES HAVE NOT PRINTING ON TOP.

3. BLACK ROTOR WITH WHITE PRINTING ON TOP AND SIDE OF SWITCH. "S" STYLES HAVE NO PRINTING ON TOP.

4. ORANGE ROTOR WITH WHITE PRINTING ON TOP AND SIDE OF SWITCH EXCEPT FOR THE "W" STYLES, WHICH HAVE BLACK PRINTING ON TOP. "S" STYLES HAVE NO PRINTING ON TOP.

5. WHITE ROTOR WITH WHITE PRINTING ON TOP AND SIDE OF SWITCH EXCEPT FOR THE "W" STYLES, WHICH HAVE BLACK PRINTING ON TOP. "S" STYLE HAVE NO PRINTING ON TOP.

6. ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS)

7. LOCATE 'ALCO' TRADE NAME AND LOT NUMBER MARKING.
LOT NUMBER TO BE MARKED AS FOLLOW:

4F

1ST DIGIT2ND DIGIT

YEAR 1194MONTH 6

MARK WITH PERMANENT WHITE INK.

SEE SHEET 2 FOR DIMENSIONAL SPEC'S

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

0810

0C00

0240

ACTUATOR
LOCATION

10—POSITION, BCDSEE NOTE 2

POS	0	1	2	3	4	5	6	7	8	9
C	X	X	X	X	X	X	X	X	X	X
1		X		X		X		X		X
2			X	X			X	X		
4					X	X	X	X		
8									X	X


16—POSITION, HEXADECIMALSEE NOTE 3

POS	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
C	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1		X		X		X		X		X		X		X		X
2			X	X			X	X			X	X			X	X
4					X	X	X	X					X	X	X	X
8									X	X	X	X	X	X	X	X



10 POSITION,
BCD COMPLEMENTSEE NOTE 4

POS	0	1	2	3	4	5
-----	---	---	---	---	---	---


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

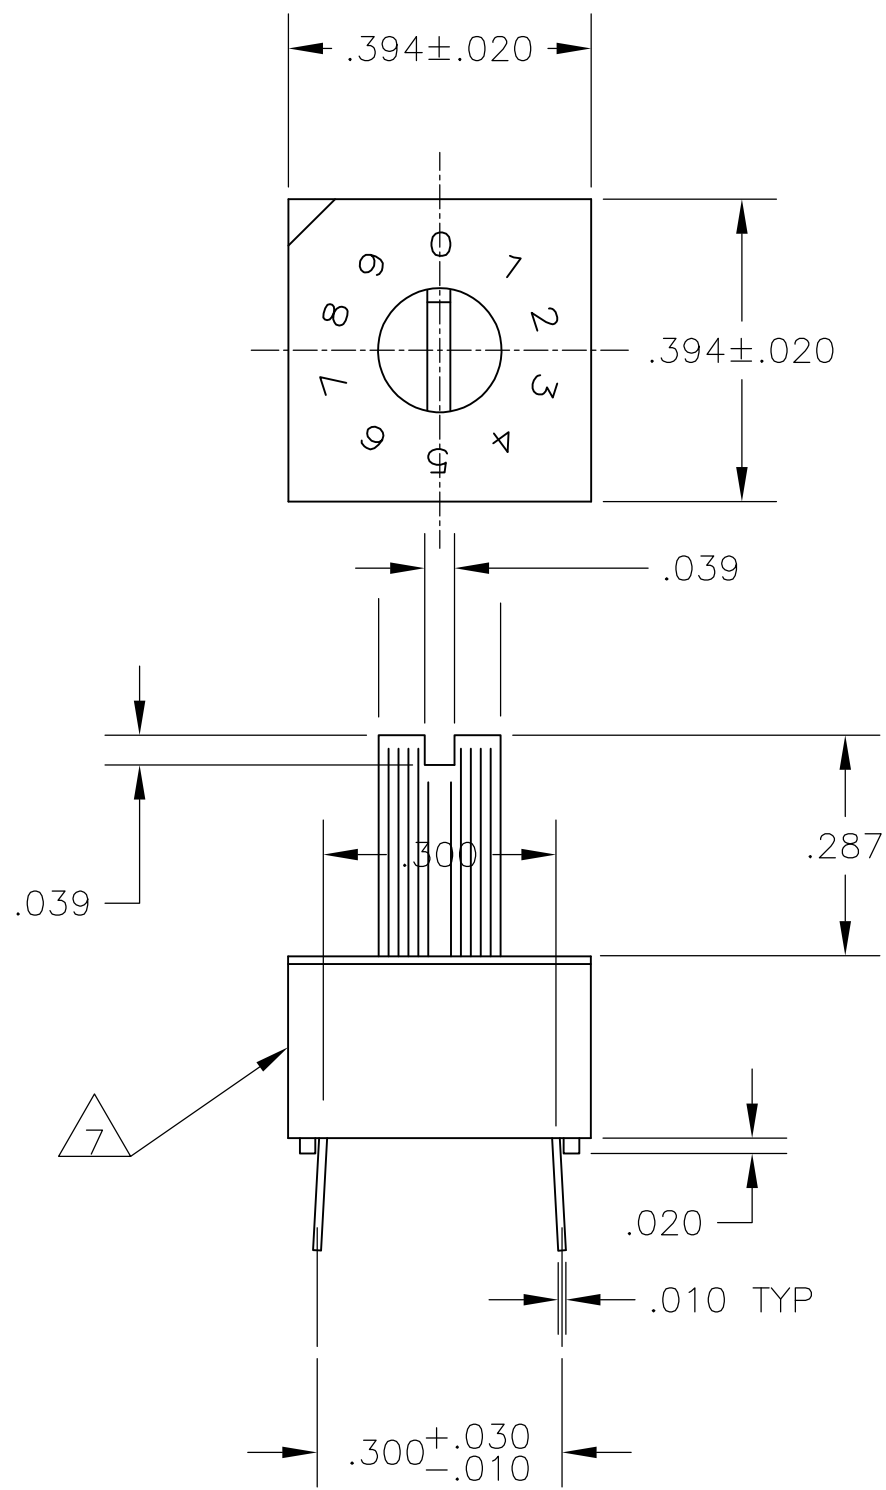


DRM
PC MOUNT

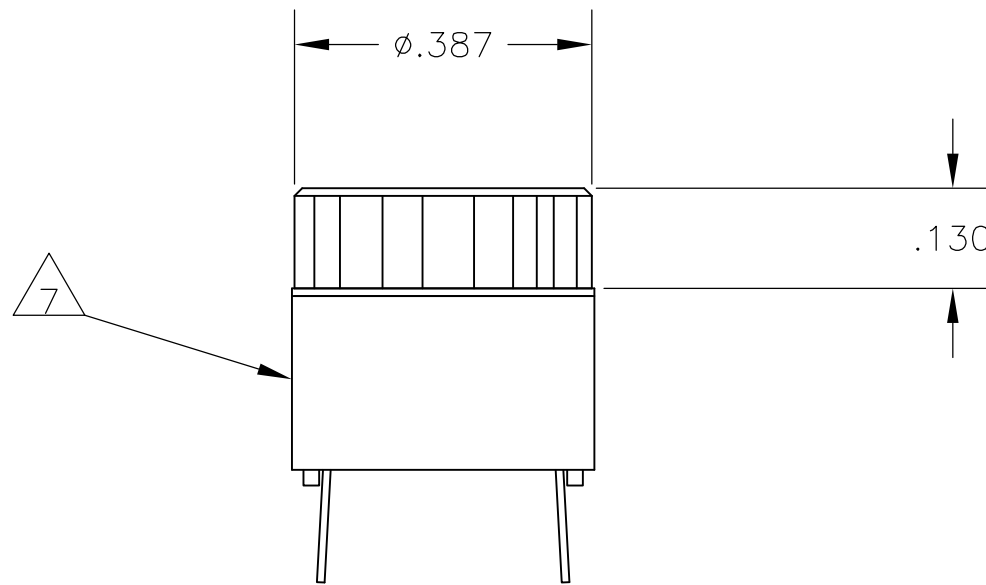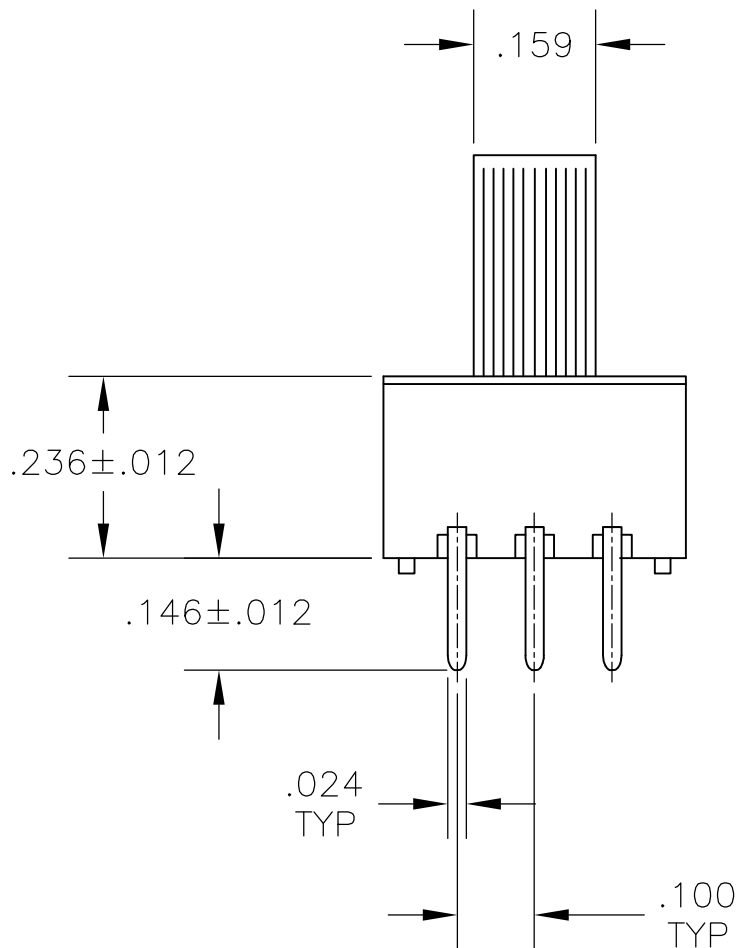


DRW
PC MOUNT

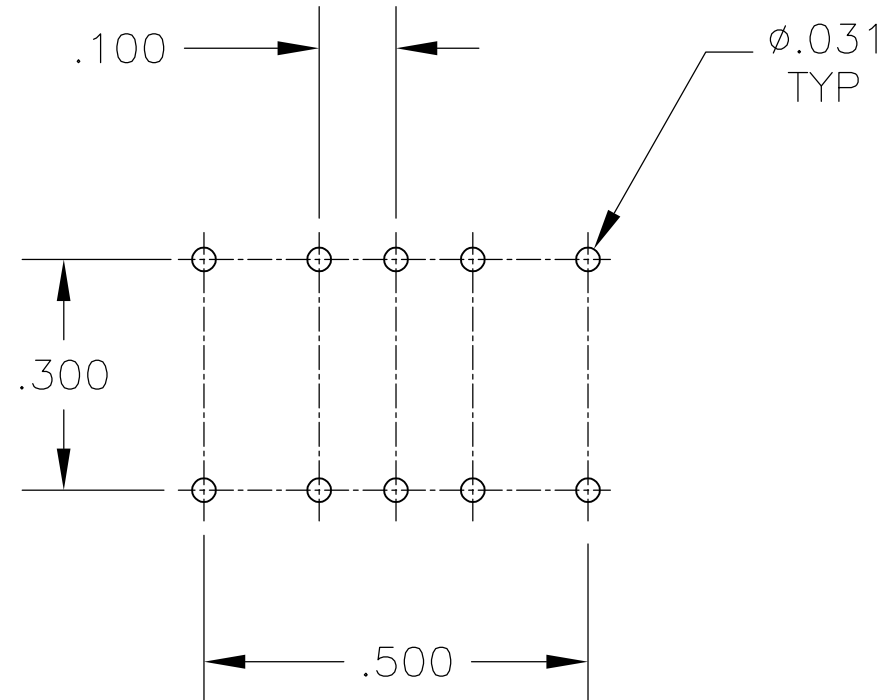


'S' STYLE VERTICAL

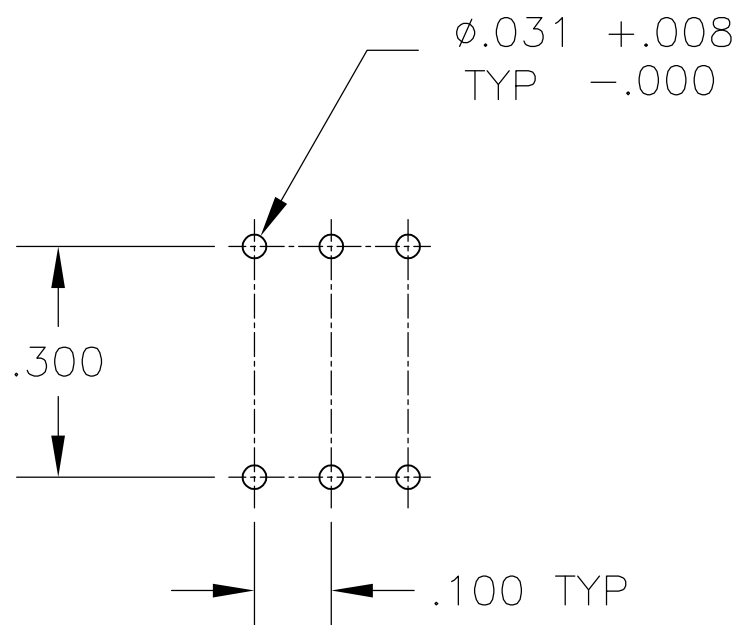


PC

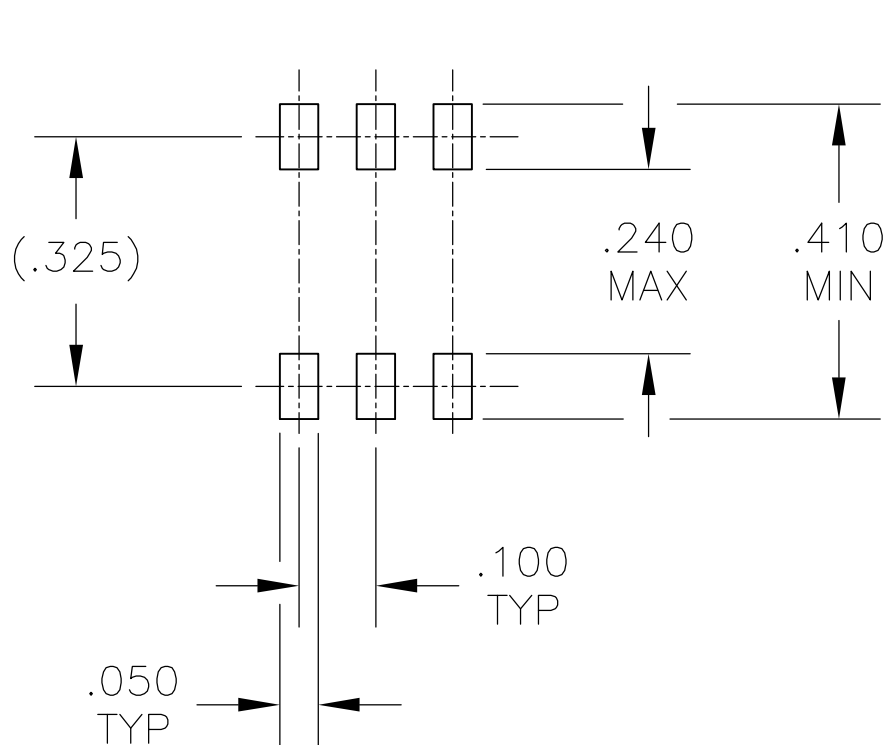




OUTSIDE "L"

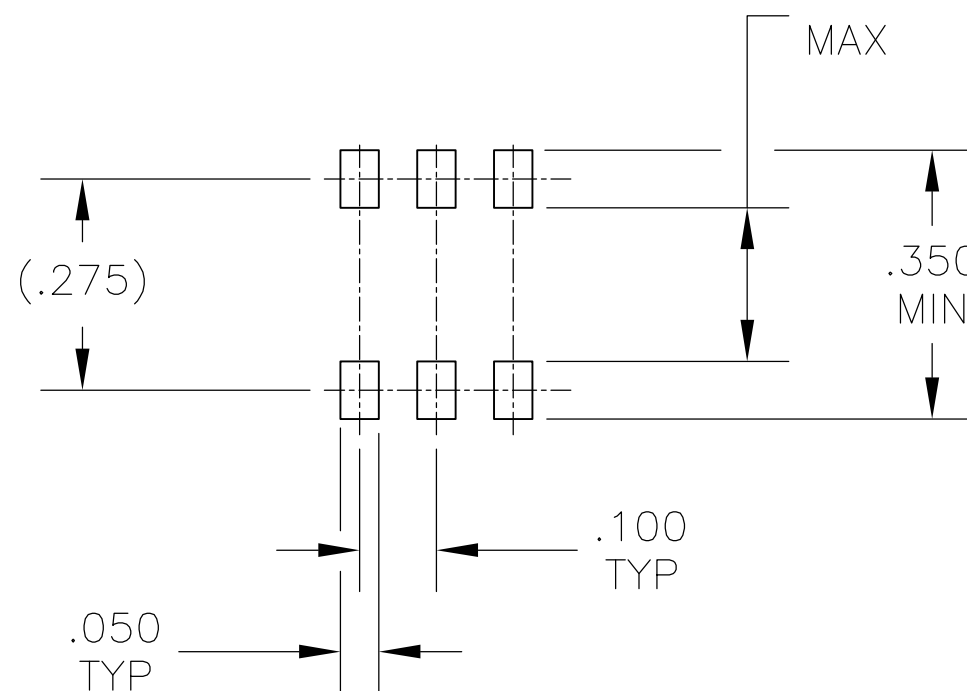


INSIDE "L"

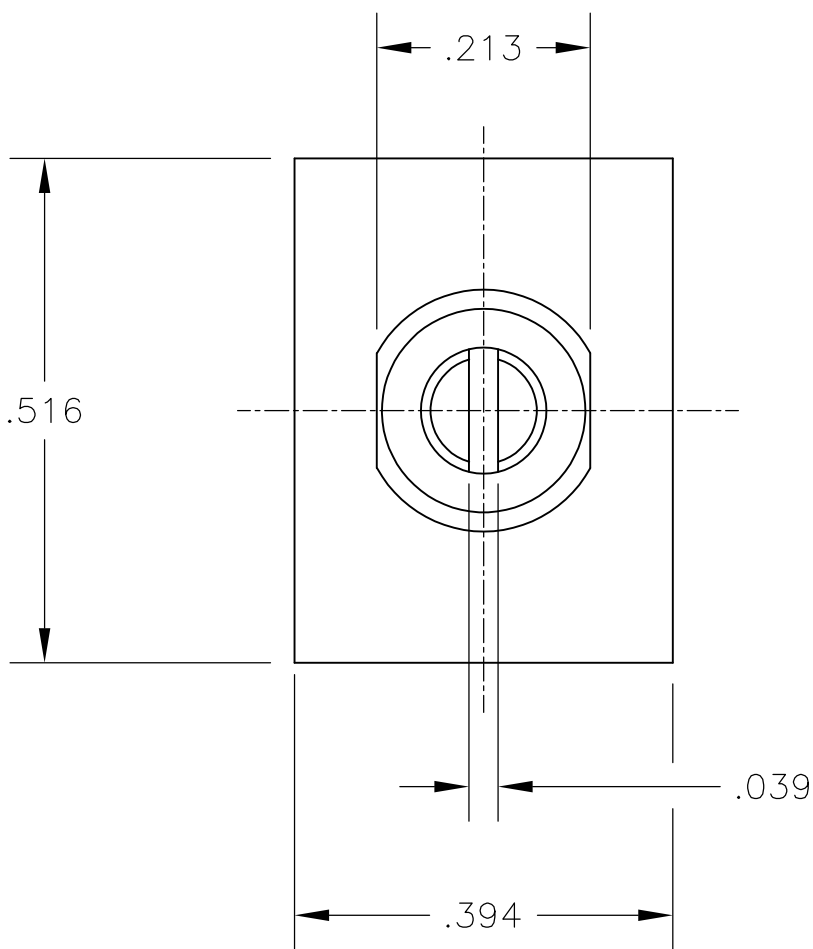

DRS
"S" STYLE VERTICAL

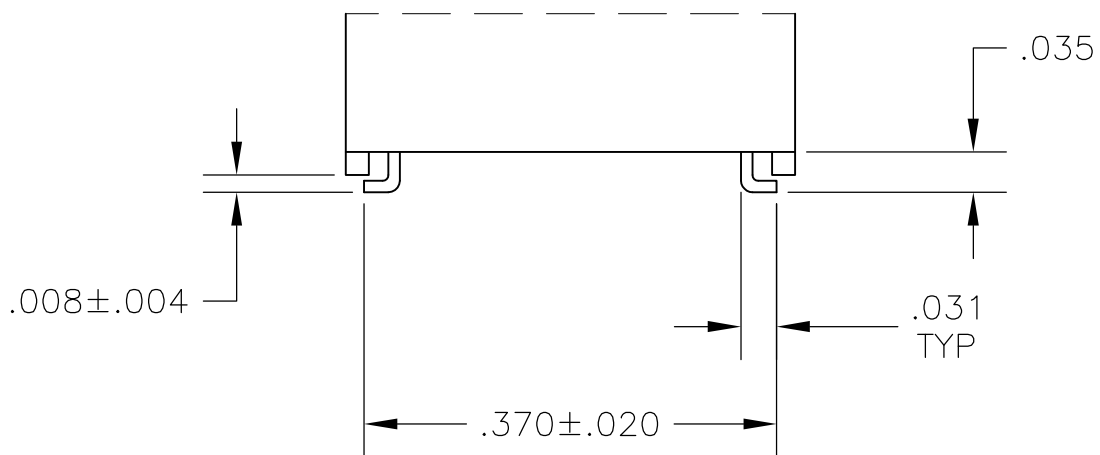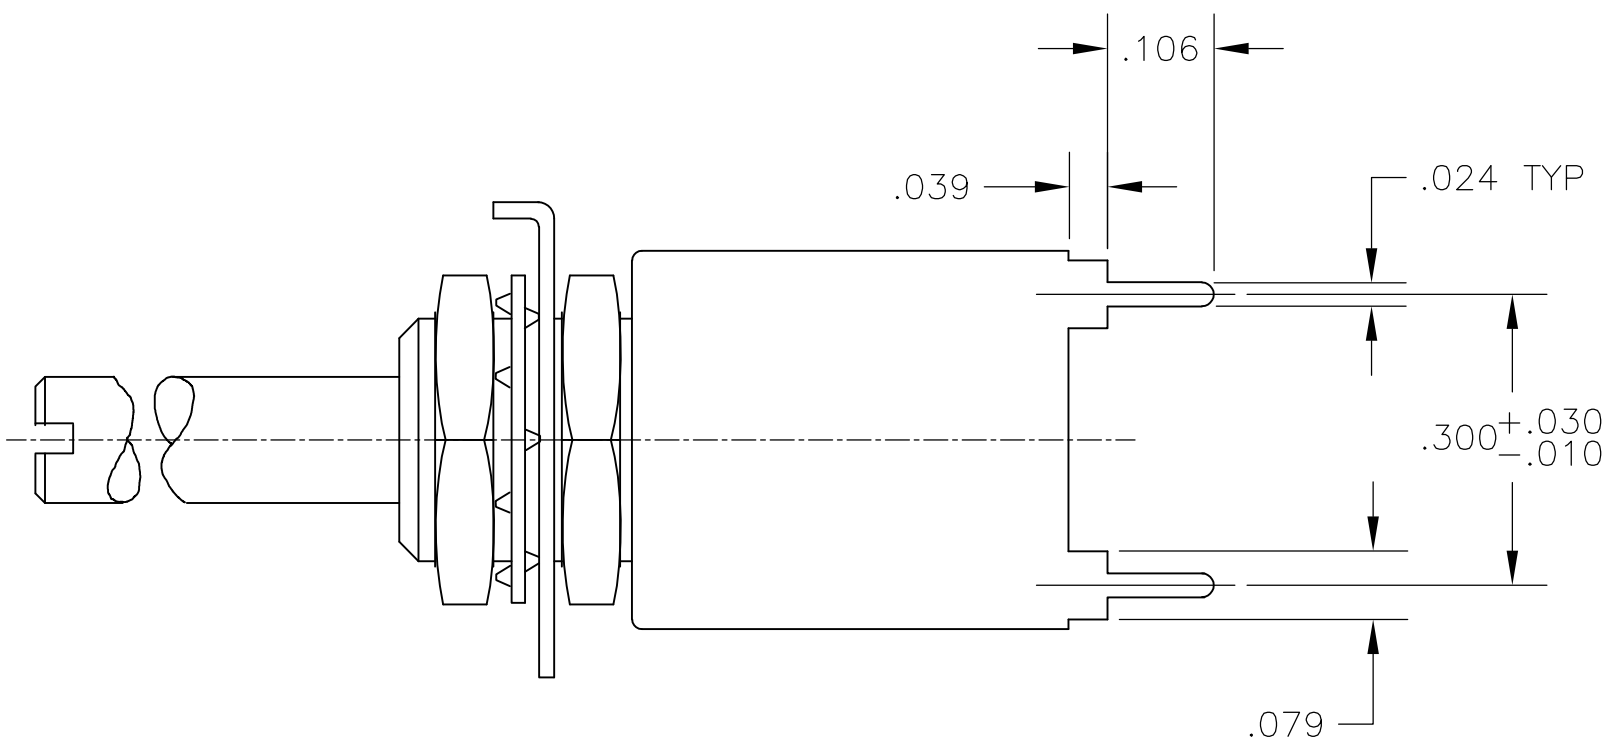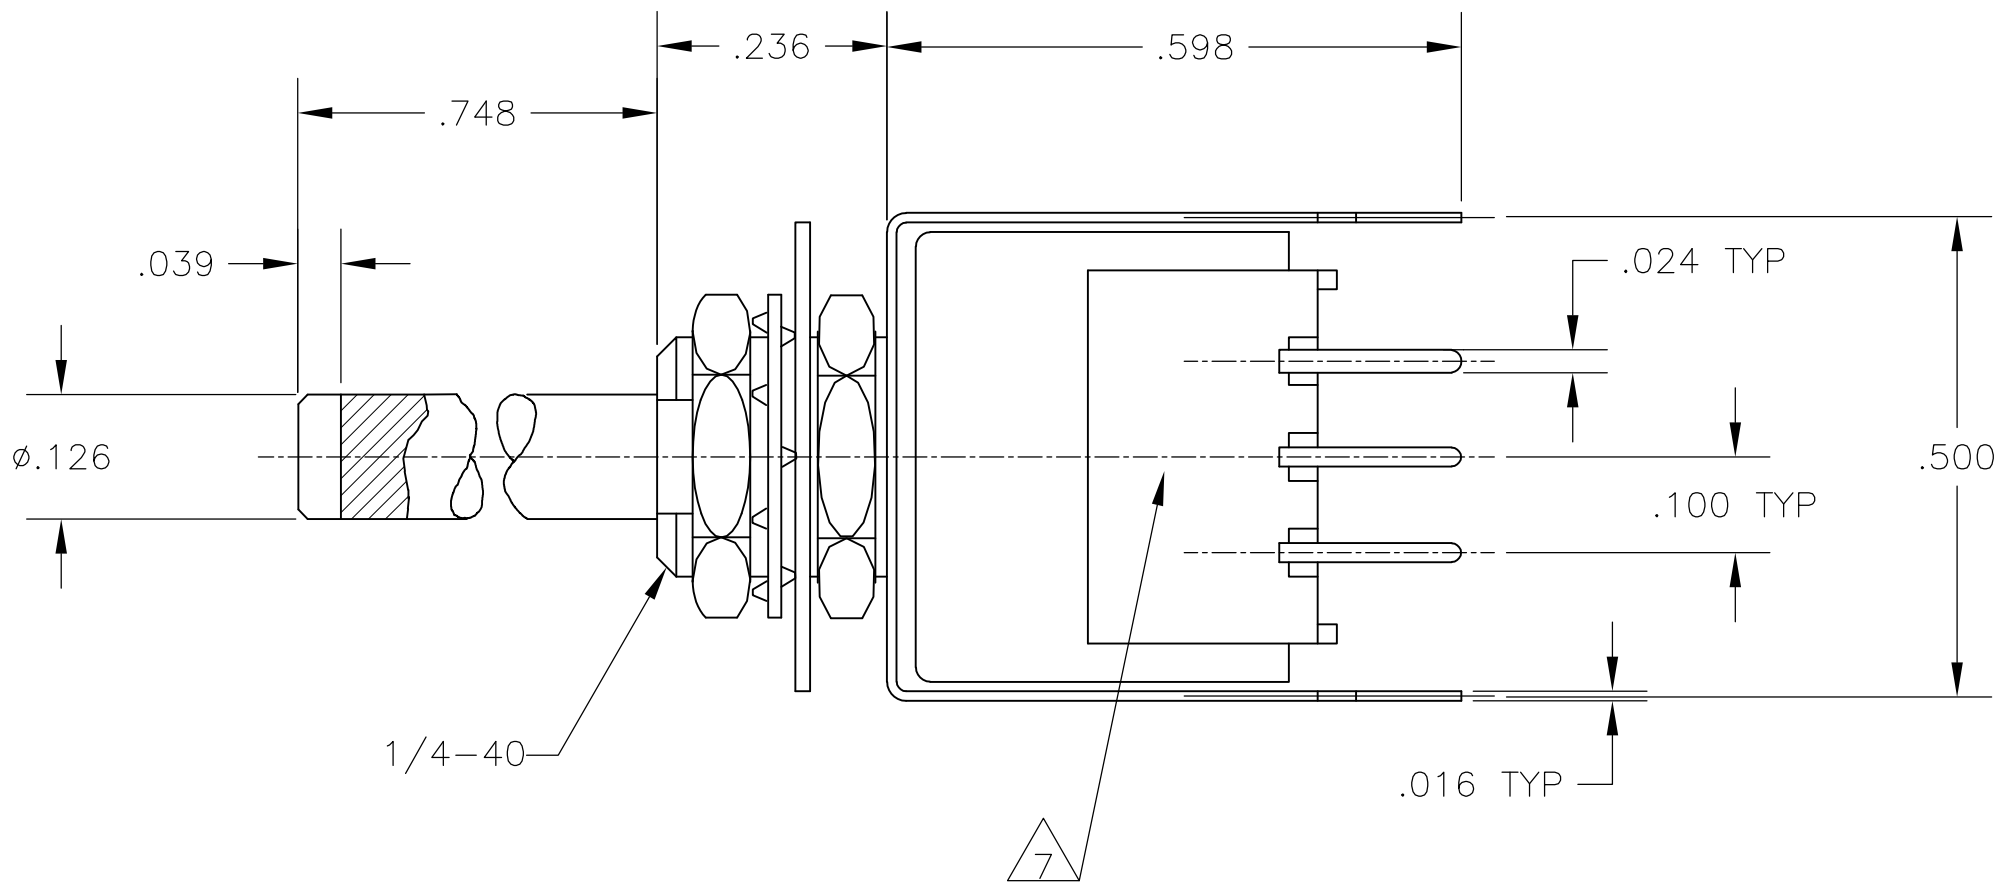

"S" OUTSIDE L TERMINAL
VERTICAL

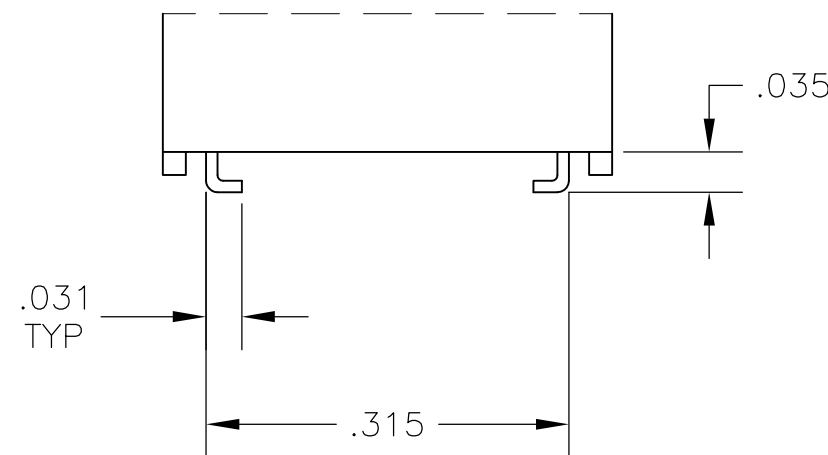

"SA" INSIDE L TERMINAL
VERTICAL

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN BSV	20JUN05	TE Connectivity	
DIMENSIONS: INCHES		CHK MSS	-		
		PRODUCT SPEC	-	NAME ROTARY DIP SWITCH	
		APPLICATION SPEC	-		
MATERIAL		WEIGHT	0	SIZE	CAGE CODE
-		FINISH	-	A1	00779
		RESTRICTED TO	-	DRAWING NO	1825033
		CUSTOMER DRAWING	-	SCALE	4:1
		SHEET	2	OF	2
		REV	A4		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[DRM1004](#) [DRM10E04](#)