

# POWER

## DS1200

1200 Watts

Distributed Power System

### Data Sheet

#### Distributed Power Bulk Front-End

**Total Output Power:** 1200 Watts

+3.3 Vdc Stand-by Output

**Wide Range Input Voltage:** 90 - 264 Vac

### SPECIAL FEATURES

- Active power factor correction
- EN61000-3-2 harmonic compliance
- Active AC inrush control
- 1U X 2U form factor
- 21.71 W/in<sup>3</sup>
- +12 Vdc Output
- +3.3 Vdc or +5.0 Vdc stand-by
- No minimum load required
- Hot plug operation
- N + 1 redundant
- Internal OR'ing fets
- Active current sharing (10 - 100% load)
- Built-in cooling fan (40 mm x 28 mm)
- I<sup>2</sup>C communication interface bus
- PMBus compliant
- EEPROM for FRU data
- Red/green bi-color LED status
- Internal fan speed control
- Fan Fail Tach Output Signal
- Full digital control
- Two year warranty

### SAFETY

- UL/cUL 60950 (UL Recognized)
- NEMKO+ CB Report EN60950
- EN60950
- CE Mark
- China CCC



### Electrical Specifications

| Input                  |  |
|------------------------|--|
| Input range:           | 180 - 264 (1200 W)<br>90 - 264 (1000 W)  |
| Frequency:             | 47-63 Hz, single phase AC  |
| Inrush current:        | 40 Apk maximum inrush current  |
| Efficiency:            | > 91% typical at high line 50% load  |
| Conducted EMI:         | FCC Subpart J EN55022 Class B  |
| Radiated EMI:          | FCC Subpart J EN55022 Class B  |
| Power factor:          | 0.99 typical   |
| Leakage current:       | 1.40 mA @ 240 VAC  |
| Hold up time:          | 12 ms minimum  |
| Output                 |  |
| Main DC voltage:       | +12 V @ 100 A (high line)<br>+12 V @ 81.6 A (low line)   |
| Stand-By:              | +3.3 Vsb @ 6 A (5 V @ 4 A available)   |
| Adjustment range:      | ±5% on +12V only using I <sup>2</sup> C  |
| Regulation:            | +12 Vdc; +5%/-5%<br>+3.3 Vsb; +5%/-5%  |
| Over current:          | +12 Vdc; latches off if overcurrent lasts over 1 second, otherwise it is auto recovery (See Table 1 next page) +3.3 Vsb, 9 A max (hiccup mode) |
| Over voltage:          | +12 Vdc; 13.2 - 14.4 Vdc<br>+3.3 Vsb; 3.76 - 4.30 Vdc  |
| Under voltage:         | +12 Vdc; 9 - 10.8 V (latch off)  |
| Turn-on delay:         | 2 second max, 5 - 50 mS, monotonic rise  |
| Main output rise time: | 5 - 50 mS, monotonic rise  |

### Logic Control

|                          |  |
|--------------------------|--|
| PS_SEATED (A4):          | TTL logic LOW if power supply is seated into system connector. This is a short pin. A logic HIGH if the PSU is removed   |
| PWR GOOD (C3):           | Active TTL high when output is within regulation limits.   |
| AC OK (B1):              | A low logic level if the input voltage is within allowable limits. A TTL logic HIGH level, and a 5mS early warning signal before 12.0 V DC output loss of regulation.  |
| PS_INHIBIT/PS_KILL (B4): | When left open power supply operation will be inhibited. When the power supply is inserted into the system, this pin will be pull low by the system and turn the power supply on only after all other power supply pins have seated. |
| PS ON (A1):              | The output will be enabled when this signal is pulled low, below 0.8 V outputs disabled when pin is driven high or left open.  |

### Environmental Specifications



|  |   |
|--|---|
| Operating temperature:                           | -10° to 50 °C   |
| Storage temperature:                             | -40 °C to +85 °C  |
| Altitude, operating:                             | 10,000 ft   |
| Electromagnetic susceptibility/Input transients: | -EN61000-3-2, -3-3<br>-EN61000-4-2, 4.3, 4-4, -4-5, 4-11<br>-EN55024:1998 |
| RoHS & lead-free compliant:                      | No tantalum caps.   |
| Humidity:  | 20 to 90% RH, non-condensing  |
| Shock and vibration specifications:              | Complies with standard operating/non-operating random shock and vibration |
| MTBF (Demonstrated):                             | 500K Hrs at full load, 25 °C  |

Ordering Information

| Model Number   | Nominal Output Voltage Set Point | Set Point Tolerance | Total Regulation | Minimum Current | Maximum Current | Output Ripple P/P | Over Current     | Stand-by    | Air Flow |
|----------------|----------------------------------|---------------------|------------------|-----------------|-----------------|-------------------|------------------|-------------|----------|
| DS1200-3       | 12.0 Vdc                         | ±0.2%               | ±5%              | 0 A             | 100 A           | 120 mV            | 118 A - 147.6 A* | 3.3 V @ 6 A | STD      |
| DS1200-3-002   | 12.0 Vdc                         | ±0.2%               | ±5%              | 0 A             | 100 A           | 120 mV            | 118 A - 147.6 A* | 5.0 V @ 4 A | STD      |
| DS1200-3-003** | 12.0 Vdc                         | ±0.2%               | ±5%              | 0 A             | 100 A           | 120 mV            | 118 A - 147.6 A* | 3.3 V @ 6 A | REV†     |
| DS1200-3-004** | 12.0 Vdc                         | ±0.2%               | ±5%              | 0 A             | 100 A           | 120 mV            | 118 A - 147.6 A* | 5.0 V @ 4 A | REV†     |


\*Over current latches off if overcurrent lasts over 1 seconds, otherwise it is auto recovery.

† Derating may apply.

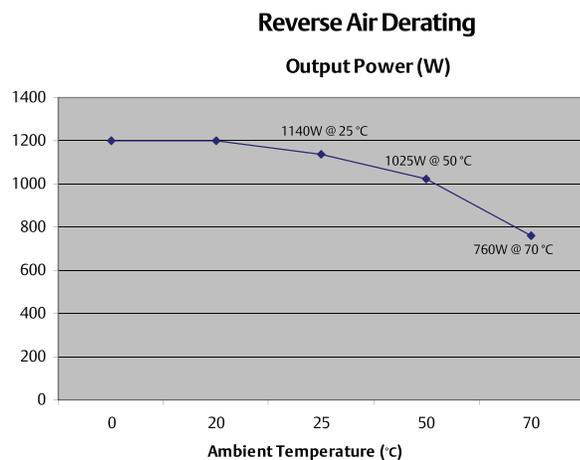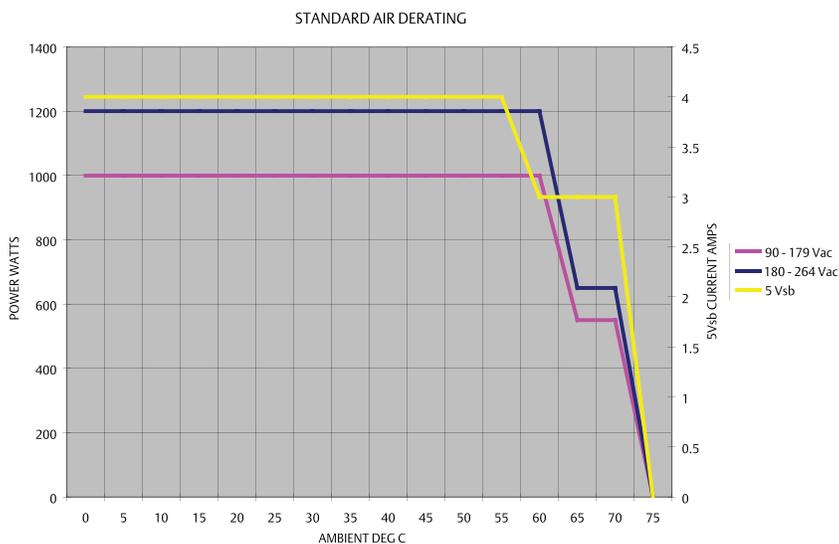

### Mechanical Drawing

| Condition                                    | LED Status     |
|--|----------------|
| Stand-by - ON; Main output - OFF; AC PRESENT | Blinking green |
| Stand-by - ON; Main output - ON;             | Solid green    |
| Main output OCP, UVP, OVP                    | Blinking Amber |
| FAN_FAULT; OTP; Stand-by OCP/UVP             | Amber          |

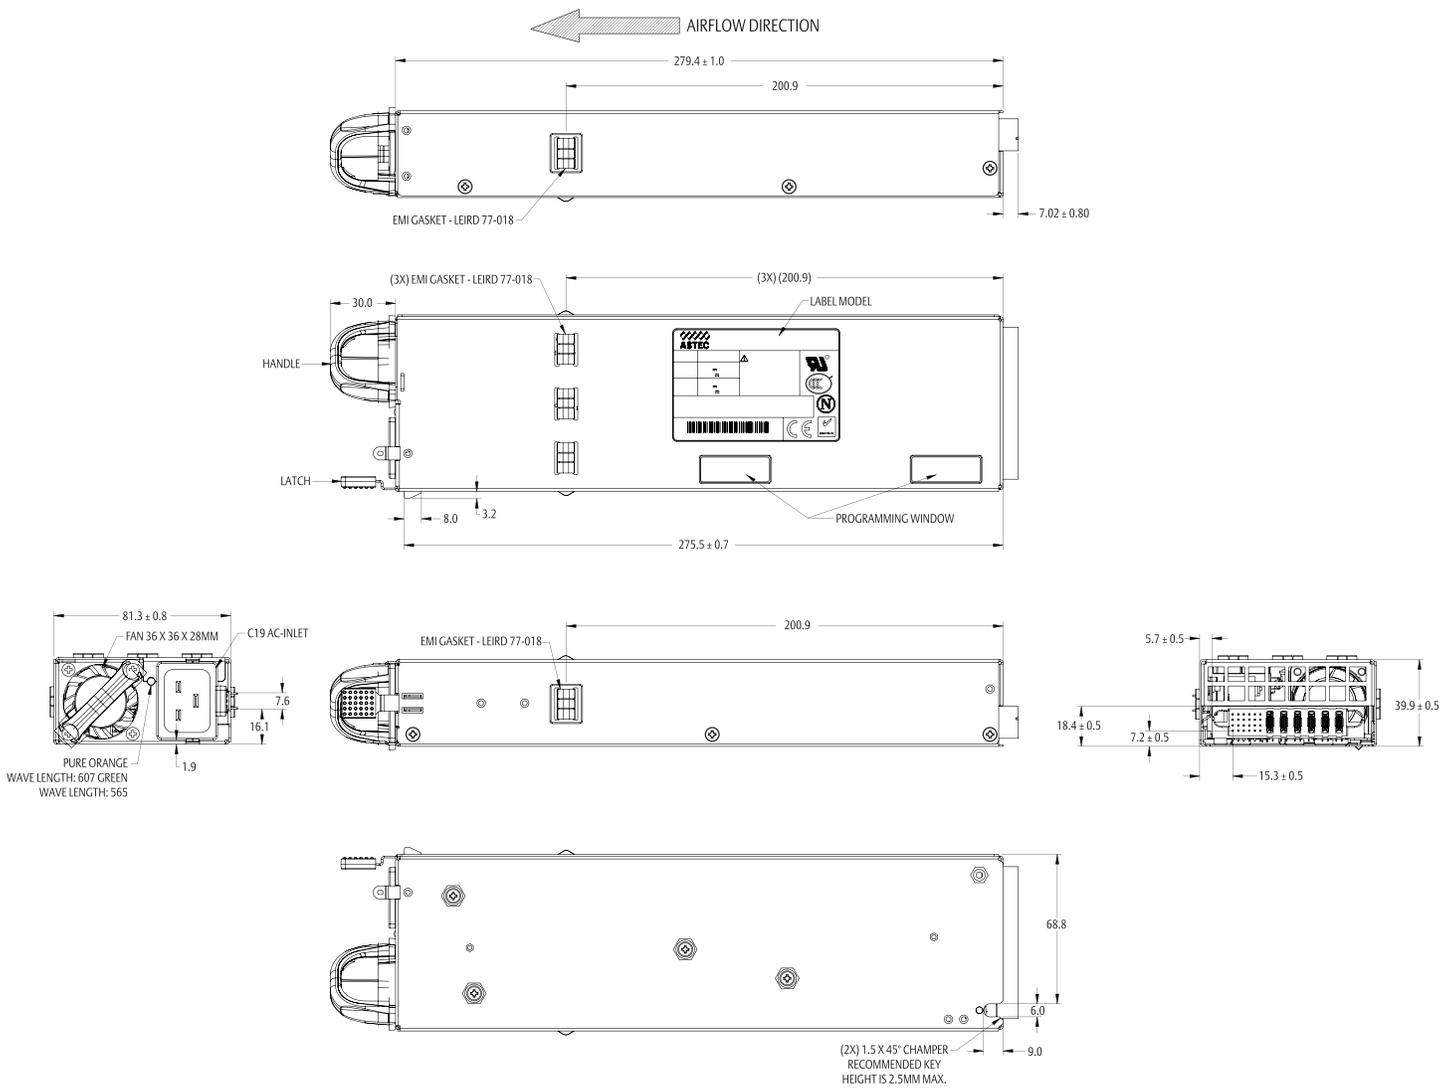

### DC Output Connector Pinout Assignment

Male connector as viewed from the rear of the supply:

|    |    |    |    |    |    |     |     |     |     |     |     |
|----|----|----|----|----|----|-----|-----|-----|-----|-----|-----|
| D1 | D2 | D3 | D4 | D5 | D6 | PB1 | PB2 | PB3 | PB4 | PB5 | PB6 |
| C1 | C2 | C3 | C4 | C5 | C6 |     |     |     |     |     |     |
| B1 | B2 | B3 | B4 | B5 | B6 |     |     |     |     |     |     |
| A1 | A2 | A3 | A4 | A5 | A6 |     |     |     |     |     |     |

### P1 - Power Supply Side

|   |  |
|---|--|
| 1 | FCI Power Blade 51721 series<br>51721-10002406AA       |
| 2 | Molex Power Connector<br>SD-87667 series<br>87667-7002 |

### Mating Connector (System Side)

|   |  |
|---|--|
| 1 | FCI Power Blade<br>51741-10002406CC<br>Strait Pins   |
| 2 | FCI Power Blade<br>51761-10002406AALF<br>Right Angle |

### Pin Assignments

| Pin  | Signal Name                     |
|------|---------------------------------|
| PB 1 | Main output return              |
| PB 2 | Main output return              |
| PB 3 | Main output return              |
| PB 4 | + Main output                   |
| PB 5 | + Main output                   |
| PB 6 | + Main output                   |
| A1   | PS_ON                           |
| A2   | Main output remote sense return |
| A3   | Spare                           |
| A4   | PS_SEATED (Power Supply Seated) |
| A5   | STAND-BY                        |
| A6   | STAND-BY RETURN                 |
| B1   | AC_OK (AC Input Present)        |
| B2   | Main output remote sense        |
| B3   | Main output current share       |
| B4   | PS_INHIBIT/PS_Kill              |
| B5   | STAND-BY                        |
| B6   | STAND-BY RETURN                 |

### Pin Assignments

| Pin | Signal Name                                |
|-----|--|
| C1  | SDA (I <sup>2</sup> C Data Signal)         |
| C2  | SCL (I <sup>2</sup> C Clock Signal)*       |
| C3  | POWER GOOD                                 |
| C4  | Spare                                      |
| C5  | STAND-BY                                   |
| C6  | STAND-BY RETURN                            |
| D1  | A0 (I <sup>2</sup> C Address BIT 0 Signal) |
| D2  | A1 (I <sup>2</sup> C Address BIT 1 Signal) |
| D3  | S_INT (Alarm)                              |
| D4  | STAND-BY RMT SENSE                         |
| D5  | STAND-BY                                   |
| D6  | STAND-BY RETURN                            |

\*Supports I<sup>2</sup>C standard mode (100 kHz) only

## WORLDWIDE OFFICES

#### Americas

2900 S.Diablo Way  
Tempe, AZ 85282  
USA  
+1 888 412 7832

#### Europe (UK)

Waterfront Business Park  
Merry Hill, Dudley  
West Midlands, DY5 1LX  
United Kingdom  
+44 (0) 1384 842 211

#### Asia (HK)

14/F, Lu Plaza  
2 Wing Yip Street  
Kwun Tong, Kowloon  
Hong Kong  
+852 2176 3333



www.artesyn.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Artesyn Embedded Technologies assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions. Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners.  
© 2014 Artesyn Embedded Technologies, Inc.

For more information: [www.artesyn.com/power](http://www.artesyn.com/power)  
For support: [productsupport.ep@artesyn.com](mailto:productsupport.ep@artesyn.com)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Artesyn Embedded Technologies:](#)

[DS1200-3-002](#) [DS1200-3-003](#) [DS1200-3-005](#) [DS1200-3](#)