
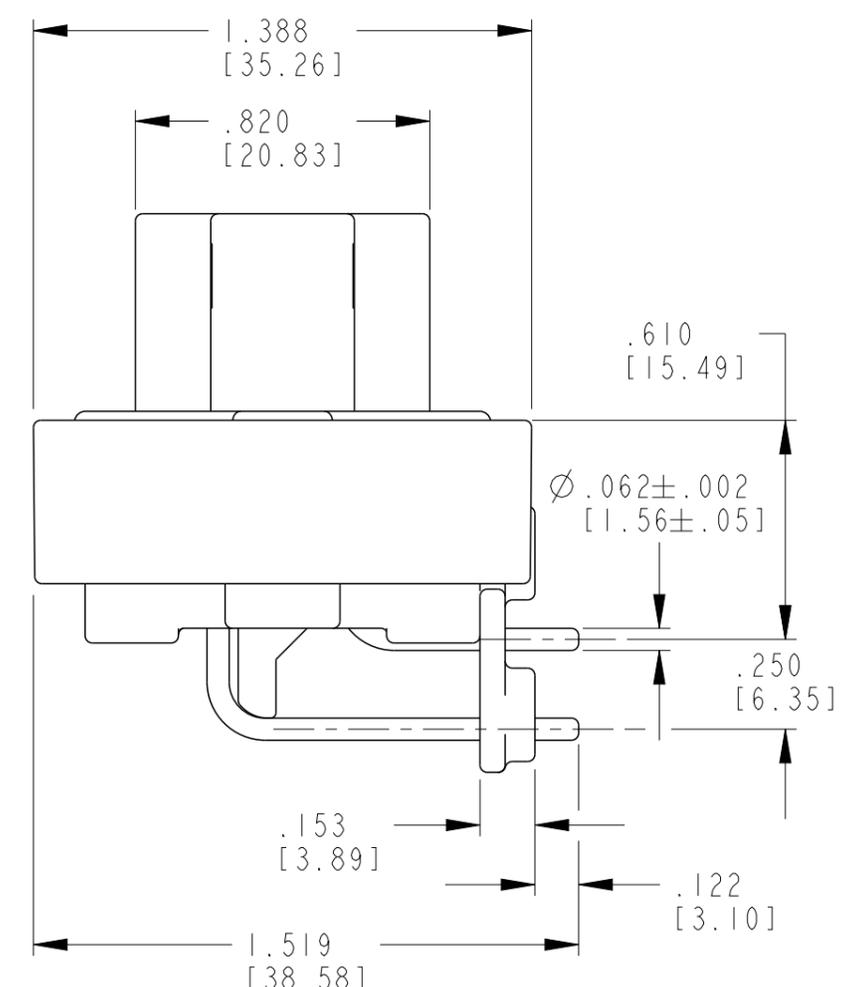
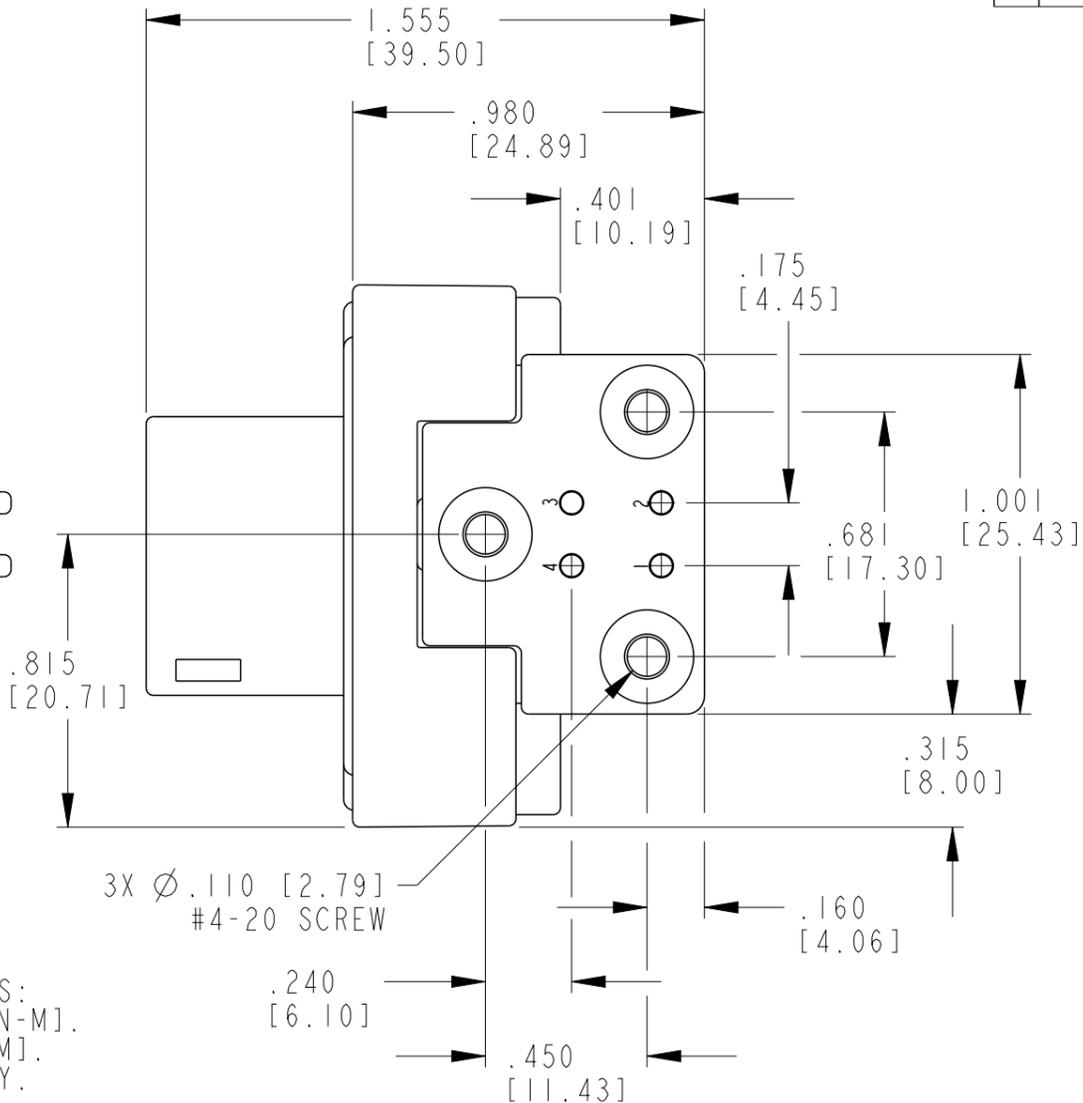


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2014
 © COPYRIGHT 2013 BY TE CONNECTIVITY ALL RIGHTS RESERVED.

| LOC | DIST | REVISIONS | | | |
|-----|------|-------------------------------------|-----------|-----|------|
| P | LTR | DESCRIPTION | DATE | DWN | APVD |
| | A | REVISED PER E.O. P15470 | 11-4-97 | | RDR |
| | B | REVISED AND REDRAWN PER E.O. P17444 | 1-9-02 | PB | RDR |
| | C | REVISED PER E.O. P19404 | 11-20-06 | PB | RDR |
| | CI | REVISED PER ECO-14-010107 | 03JUL2014 | JA | DM |

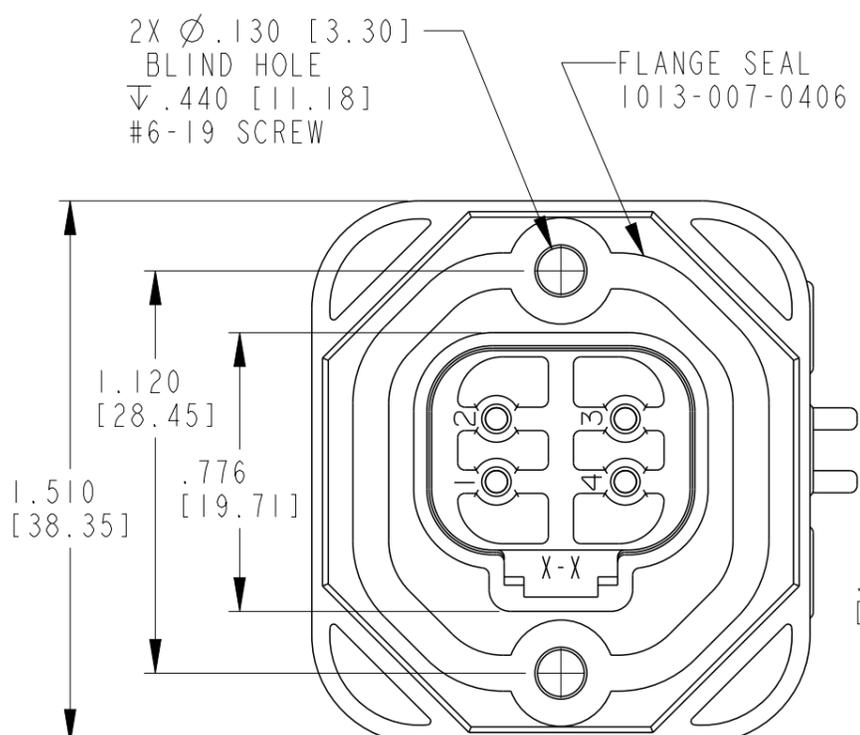

6. MOUNTING SCREW TORQUE VALUES ARE AS FOLLOWS:
 #6-19 SCREWS: 13±2.0 IN-LB [1.47±0.23 N-M].
 #4-20 SCREWS: 8±2.0 IN-LB [.90±0.23 N-M].
 VALUES VALID FOR PLASTITE 48 SCREWS ONLY.
5. RECOMMENDED MOUNTING SCREWS (NOT INCLUDED):
 CAMCAR PLASTITE 48, SINGLE HELIX.
4. THIS RECEPTACLE MATES WITH DT06-4S-XXXX PLUG
 (XXXX = ALL MODIFICATIONS.)
3. CONTACT PLATING - MATING SIDE: NICKEL; PCB SIDE: TIN.

- 2 MATERIALS:
 SHELL: PA GF30 (GRAY)
 SEAL: SILICONE (ORANGE-RED)
 PIN CONTACTS: COPPER ALLOY
- 1 DIMENSION TOLERANCE: ±.025 [.64]
 PANEL CUTOUT: ±.010 [.25]
 PIN LOCATIONS: ±.005 [.13]
 MOUNTING HOLE LOCATIONS: ±.010 [.13]





NOTES:

| | | | | |
|--|--|----------------------------|---|-----------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN P. BURKE 20DEC2001 |  TE Connectivity | |
| DIMENSIONS: INCHES [mm] | | CHK KEVIN MCKEE 03JUL2014 | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APVD DAVID MEYER 03JUL2014 | | |
| 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±0°30'0" | | PRODUCT SPEC | | |
| MATERIAL 2 | | FINISH | NAME RECEPTACLE HEADER 4 PIN 90 DEG DT SERIES | RESTRICTED TO |
| | | WEIGHT 22g±10% | SIZE A3 | CAGE CODE 4AFU8 |
| | | CUSTOMER DRAWING | DRAWING NO. DT13-4P | SCALE 2:1 |
| | | | SHEET 1 OF 2 | REV CI |

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2014

© COPYRIGHT 2013 BY TE CONNECTIVITY ALL RIGHTS RESERVED.

| LOC | | DIST | | REVISIONS | | | |
|-----|-----|-------------|--|-----------|-----|------|--|
| P | LTR | DESCRIPTION | | DATE | DWN | APVD | |
| | C1 | SEE SHEET 1 | | 03JUL2014 | JA | DM | |
| | | | | | | | |
| | | | | | | | |

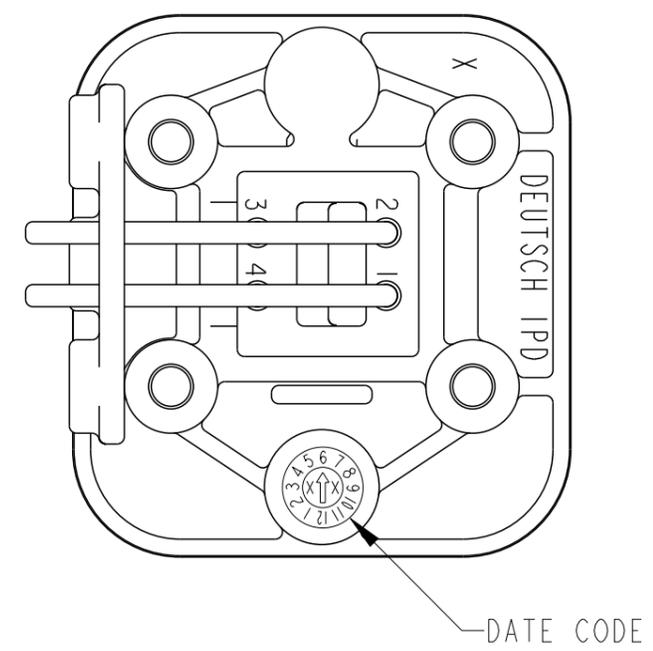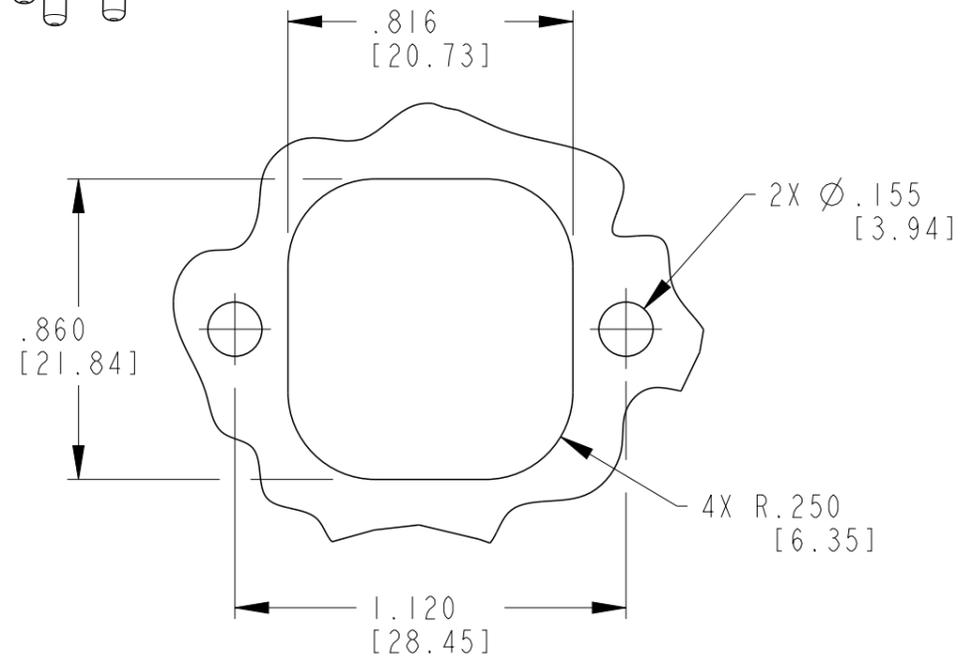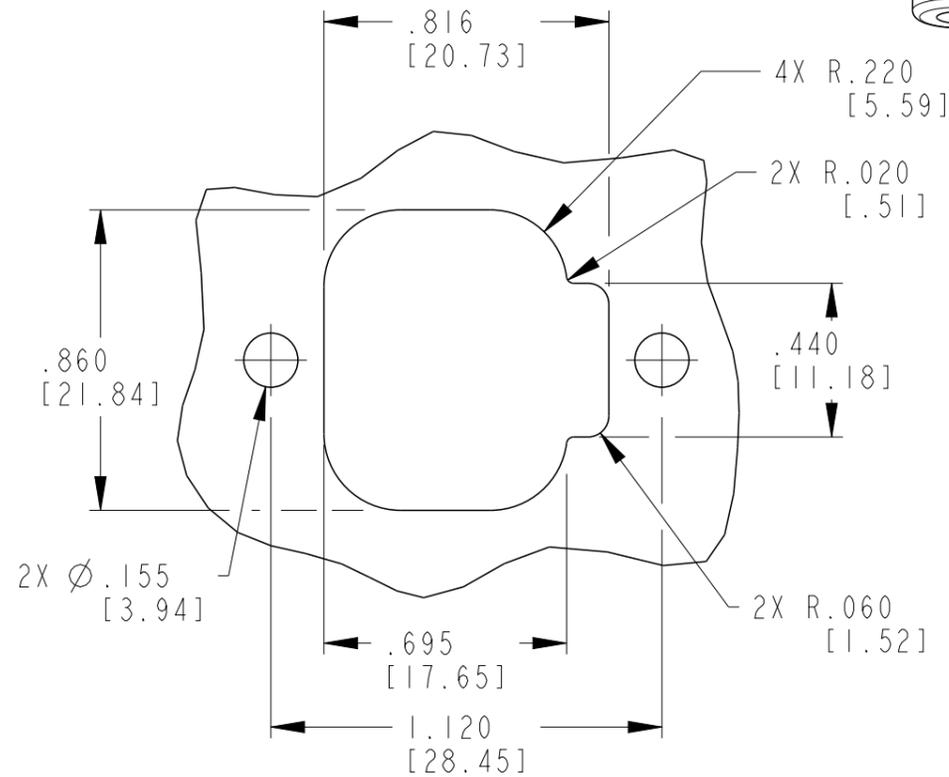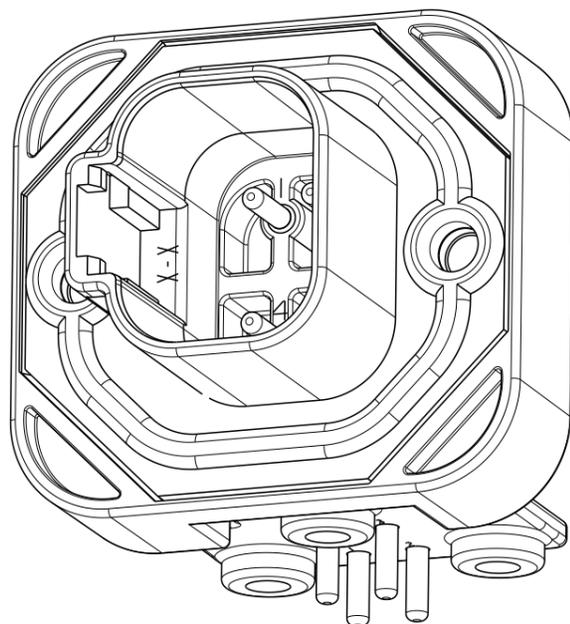

RECOMMENDED PANEL CUTOUTS

| | | | | | |
|--|--|--|-----------|-------------------------|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN P. BURKE | 20DEC2001 | | |
| DIMENSIONS: INCHES [mm] | | CHK | APVD | | |
| | | TOLERANCES UNLESS OTHERWISE SPECIFIED: | | PRODUCT SPEC | |
| | | 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±0°30'0" | | APPLICATION SPEC | |
| MATERIAL | | FINISH | | SIZE A3 | |
| | | | | CAGE CODE 4AFU8 | |
| | | | | DRAWING NO G-DT13-4P | |
| | | WEIGHT 22g±10% | | RESTRICTED TO | |
| | | CUSTOMER DRAWING | | SCALE 2:1 | |
| | | | | SHEET 2 OF 2 | |
| | | | | REV C1 | |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[DT13-4P](#)