

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	TAB SIZE in. [mm]	WIRE RANGE		COLOR	DIMENSIONS in. [mm]				TOOL CHART	
		ENGLISH AWG	METRIC mm²		MAX. WIRE INSULATION DIAMETER	L ± .03 [0,8]	W ± .01 [0,3]	H ± .01 [0,3]	PRESSES: CP-861, CP-862, CP-871	
									APPLICATOR DIES: CA9, CA-800EZ	
DV18-250B	.250 X .032 [6,3 X 0,8]	22-18	0,5-1,0	RED	.15 [3,8]	.83 [21,1]	.29 [7,4]	.12 [3,0]	CD-800-1 CD9-1A	
DV18-205B	.205/.187 X .032 [5,2/4,8 X 0,8]					.77 [19,6]	.25 [6,4]	.12 [3,0]		
DV18-206B	.205/.187 X .020 [5,2/4,8 X 0,5]					.77 [19,6]	.25 [6,4]	.11 [2,8]		
DV18-187B	.187 X .032 [4,8 X 0,8]					.77 [19,6]	.23 [5,8]	.10 [2,5]		
DV18-188B	.187 X .020 [4,8 X 0,5]					.77 [19,6]	.23 [5,8]	.09 [2,3]		
DV14-250B	.250 X .032 [6,3 X 0,8]	16-14	1,5-2,5	BLUE	.17 [4,3]	.83 [21,1]	.29 [7,4]	.12 [3,0]	CD-800-2 CD9-2A	
DV14-205B	.205 X .032 [5,2 X 0,8]					.77 [19,6]	.25 [6,4]	.12 [3,0]		
DV14-206B	.205/.187 X .020 [5,2/4,8 X 0,5]					.77 [19,6]	.25 [6,4]	.11 [2,8]		
DV14-187B	.187 X .032 [4,8 X 0,8]					.77 [19,6]	.23 [5,8]	.10 [2,5]		
DV14-188B	.187 X .020 [4,8 X 0,5]					.77 [19,6]	.23 [5,8]	.09 [2,3]		
*DV10-250	.250 X .032 [6,3 X 0,8]	12-10	4,0-6,0	YELLOW	.23 [5,8]	.95 [24,1]	.29 [7,4]	.12 [3,0]	CD-800-3, CD9-3B	


*NOT UL LISTED

NOTES:

- USED FOR:
 - STRANDED COPPER WIRE ONLY
 - 221°F [105°C] MAX. OPERATING TEMPERATURE
 - 600V. MAX. BLDG WIRE
 - 6-12 LBS INTIAL INSERTION/WITHDRAWAL FORCE
- MATERIAL:
 - STAMPING: CDA 260 BRASS, TIN PLATED
 - HOUSING: VINYL
- WIRE STRIP LENGTH:

9/32 $\begin{smallmatrix} +1/32 \\ -0 \end{smallmatrix}$ [7,1 $\begin{smallmatrix} +0,8 \\ -0 \end{smallmatrix}$]

11/32 $\begin{smallmatrix} +1/32 \\ -0 \end{smallmatrix}$ [8,7 $\begin{smallmatrix} +0,8 \\ -0 \end{smallmatrix}$] FOR DV10-250
- SEE www.panduit.com FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT
- THE DV10-250 IS CONSTRUCTED WITH BRASS SLEEVE IN THE WIRE CRIMP AREA

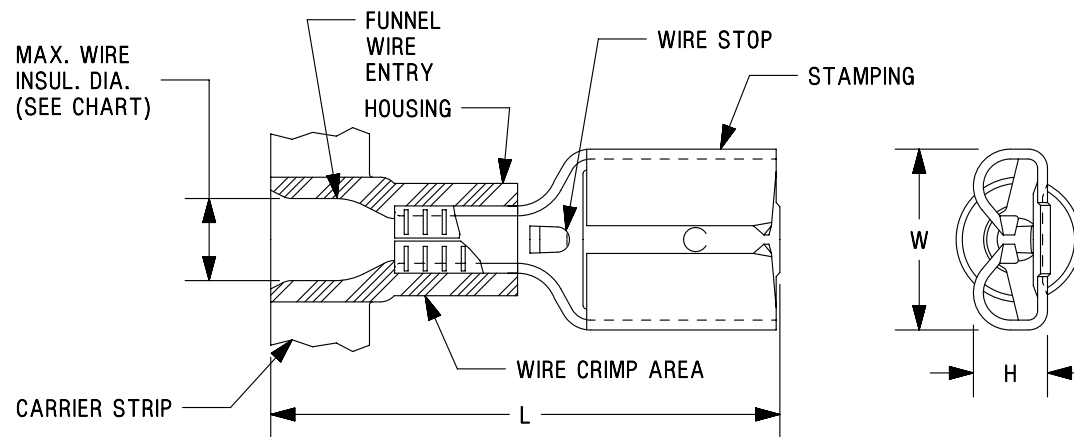

LISTED 20H3
E78522

CERTIFIED LR31212

TITLE			
FEMALE DISCONNECTS, VINYL INSULATED			
CUSTOMER DRAWING			
ITEM REVISION NAME		N41169BA/10	
DATASET FILE NAME		N41169BA_DC/10A	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL:	
.x ± .1 [2.54]		.xxx ± .005 [.127]	
.xx ± .01 [.25]		ANGLES ± 5°	
THIRD ANGLE PROJECTION		DRAWING NUMBER:	
A41169		SHT 1 OF 1	
DRAWN BY	DATE	CHK	SCALE
DSM	-	LA	N.T.S.
SIZE			A

10	10.10.12	JBN	LCA	VMB	ADDED METRIC EQUIVALENT. CHANGE PACKAGING NOTE. REVISED INSTALLATION TOOLS NOTE. UPDATED DRAWING TO CURRENT STANDARDS.	A41169
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[DV14-250B-3K](#) [DV18-205B-3K](#) [DV18-250B-3K](#) [DV14-205B-3K](#) [DV14-188B-3K](#) [DV14-187B-3K](#) [DV14-206B-3K](#)
[DV18-188B-3K](#) [DV10-250-2K](#) [DV18-206B-3K](#) [DV18-187B-3K](#)