



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PART NUMBER	TAB SIZE	WIRE RANGE AWG	MAX. INSUL. DIA.	DIMENSIONS in.			HOUSING COLOR
				A $\pm .03$	B $\pm .01$	C $\pm .01$	
DV18-250B	.250 X .032 (6.3 X 0.8)	22-18	.150 (3.8)	.81 (20.6)	.29 (7.4)	.12 (3.0)	RED
* DV14-250B	.250 X .032 (6.3 X 0.8)	16-14	.170 (4.3)	.81 (20.6)	.29 (7.4)	.12 (3.0)	BLUE



NOTES:

- UL LISTED, UL RECOGNIZED (DV14-250B ONLY),
CSA CERTIFIED FOR:
A. 600V. MAX. VOLTAGE RATING
B. STRANDED COPPER WIRE ONLY
C. 221° F (105° C) MAX. TEMP. RATING
D. 10A. MAX (DV14-250B ONLY)
- MATERIAL:
A. STAMPING - .016" (0.41) THK BRASS,
TIN PLATED
B. HOUSING - VINYL
- PACKAGE QTY: STD. PKG. -C=100
BULK PKG. -M=1000
- INITIAL INSERTION FORCE - 12 LB. (53 N.) MAX
INITIAL WITHDRAWAL FORCE - 12 LB. (53 N.) MAX
6 LB. (27 N.) MIN
- DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
- INSTALLATION TOOLS:
A. UL LISTED AND CSA CERTIFIED: CT-520, CT-1525
B. UL RECOGNIZED: CT-520, CT-1525
- WIRE STRIP LENGTH: 1/4 $\pm .1/32$ (6.3 $\pm .8$)

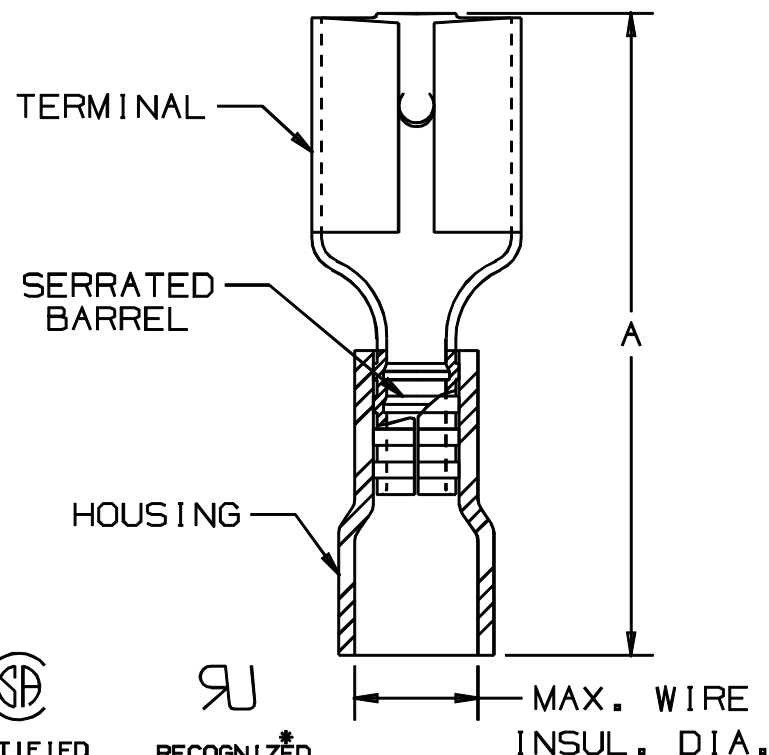

A41307_06

06		JKD		ADDED CT-1525 TOOL				PANDUIT CORP. TINLEY PARK, ILLINOIS FEMALE DISCONNECT, VINYL INSULATED (.250 SERIES)
05	10/94	MS	RS	UPDATED NOTES AND DIMENSIONS	02531	JM	LA	
04	4-94	SM	JCJ	REMOVED CURL FLOOR SLOTS	02245	JM	LA	
03	8-88	DW	LA	REDRAWN WITH REVISIONS		JB	LA	
REV	DATE	BY	CHK	DESCRIPTION	ECN #	PM	APP	DRAWN BY DAW Ck'd LA SCALE NONE DRAWING NO. A41307