


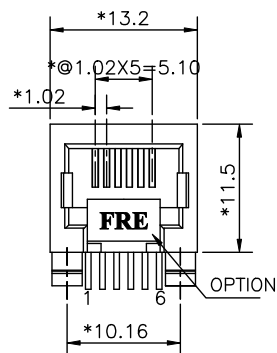



D1RFRD006

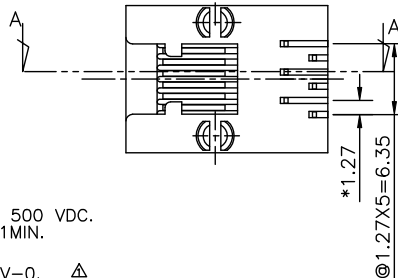

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
1		Drawing Modify	WU	WU



PC BOARD LAYOUT COMPONENT SIDE SHOWN

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 35 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

- HOUSING MATERIAL : HIGH TEM. UL94V-0. Δ
- CONTACT MATERIAL : PHOSPHOR BRONZE $t=0.35\text{mm}$.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO $+85^{\circ}\text{C}$.
- OPERATION: -40°C TO $+85^{\circ}\text{C}$.

MATES WITH MODULAR PLUG CONFORMING TO

FCC PART 68, SUBPART F.

PART NUMBER: E536X-F00XXX-L

NO OF CONTACT: 1- 3u" 2- 6u"
2- 2C 3- 15u" 4- 30u"
4- 4C 5- 50u"
6- 6C 50 - W/ FRE LOGO
5R - W/O LOGO

MM (INCH)		DATE 11/13/04		FULL RISE ELECTRONIC CO., LTD	
TOLERANCES EXCEPT AS NOTED		CHKD QIANPLU DATE 2005/1/19		TITLE DEEP TYPE	
MFO		DATE		11.5 SIDE ENTRY 6P	
APPLY LUSHENG DATE 2005/1/19		MATERIAL :		DRAWING NO. GE533099	
ANGLES $\pm$		QTY :		/PART NO. SEE NOTE	
THIRD ANGLE PROJECTION		FINISH :		DO NOT SCALE DRAWING	
SCALE : 3:1		SHEET X		OF Y	

8

7

6

5

4

3

2

1