
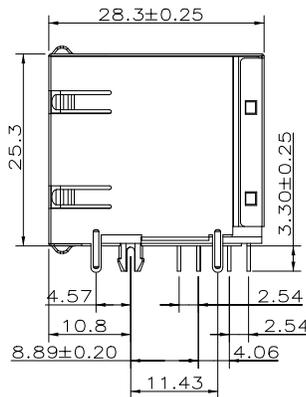


A1RFRD10

REVISION RECORD				
REV	ECC	DESCRIPTION	DRFT	CHKD

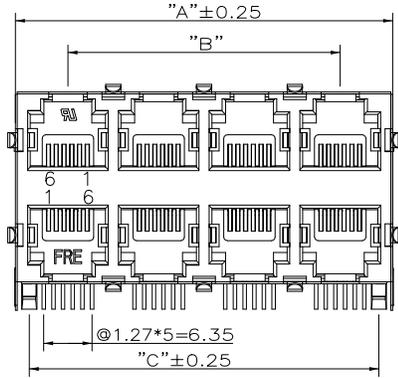

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 50 MILLIOHMS MAX.
- INSULATION RESISTANCE : 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

- HOUSING MATERIAL : NYLON+30%.G.F(FR52) UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER : 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE: -40°C TO +85°C.
- OPERATION: 0°C TO 70°C.
- WAVE SOLDERING TEMPERATURE : 255~265°C (5~10 SECONDS)

MATES WITH MODULAR PLUG CONFORMING TO

FCC PART 68, SUBPART F.



PART NUMBER: E596X-XXX13X-L

- Contact  
 4-4C Gold Thickness:  
 4-6C 1-3u" 2-6u" 3-15u"  
 6-6C 4-30u" 5-50u" 6-Pd20u"

- Tab:  
 1-W/O Tab  
 5-W/ Top & Side  
 & Bottom tabs

- Ports  
 A-2x2 C-2x4 D-2x5  
 E-2x6 G-2x8

- Shield:  
 D-Nickel Plated With  
 Tinned Grounding Peg  
 7- Nickel

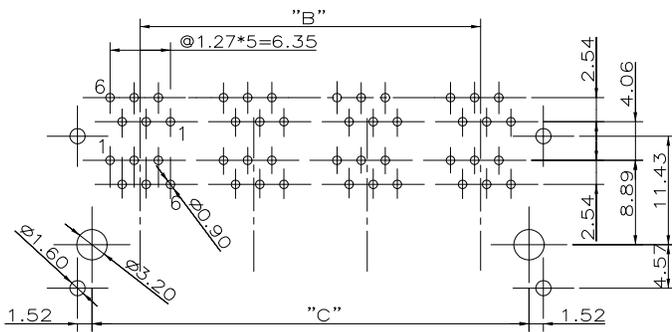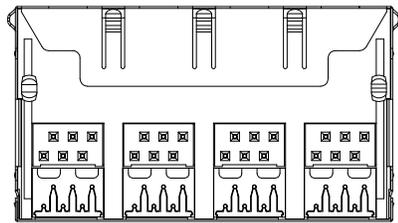

PC BOARD COMPONENT SIDE SHOWN

DIM \ PORT	2x2	2x4	2x5	2x6	2x8
"A" ±0.25	25.74	49.61	61.55	73.49	97.37
"B"	11.938	35.814	47.752	59.690	83.566
"C" ±0.25	22.10	45.97	57.91	69.85	93.73

← MM →		DFTO Qianpu	DATE 5/24/05'	FULL RISE ELECTRONIC CO., LTD	
TOLERANCES EXCEPT AS NOTED	CMO YICAN	DATE 2005/5/24			
.0 ± 0.2	WFO	DATE 2005/5/24			
.00 ± 0.15	APPVLSAMMY	DATE 2005/5/24			
.000 ± 0.075	MATERIAL :			TITLE	
ANGLES ± 0.5	QTY :			RJ11 STACKED PCB GANG JACK	
THIRD ANGLE PROJECTION	FINISH :			DRAWING NO. GE593A69-LA	SIZE REV
	SCALE : 2:1			/PART NO. SEE NOTE	A3 0
				DO NOT SCALE DRAWING	SHEET 1 OF 1

8 7 6 5 4 3 2 1

H  
G  
F  
E  
D  
C  
B  
A