Rev	AWO #	Description	Date	Appr
-	9427	RELEASED	3/06/09	

APPROVED: _____

DATE: _____ TITLE: _____

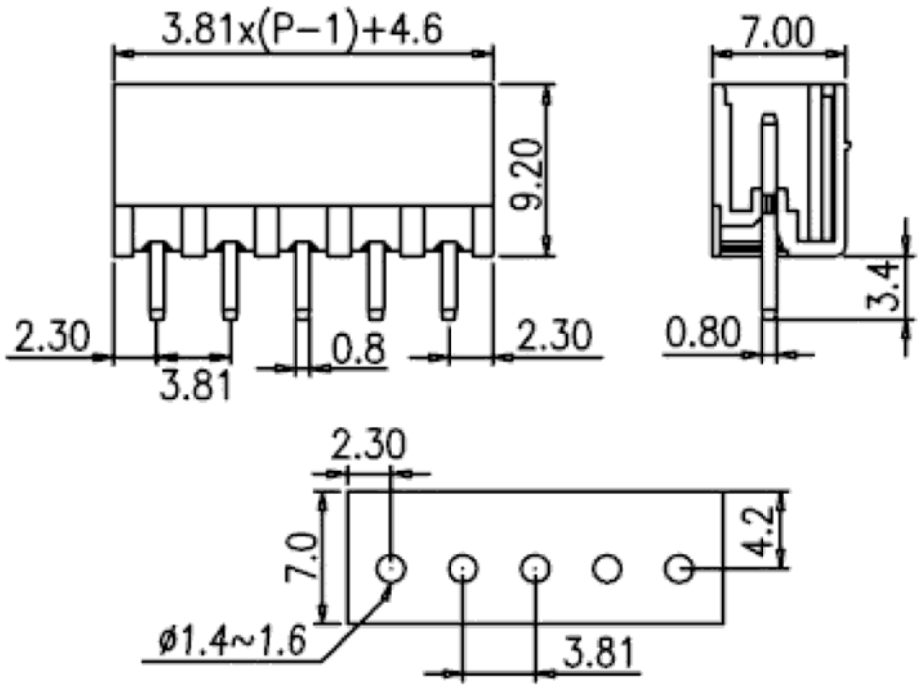

SPECIFICATIONS:
Material:
Insulator: PA66, rated UL 94V−0
Insulator color: Green
Contact: Copper, Tin plated.
Electrical:
Operation voltage: 300 VAC max
Current rating: 8 Amps max per Pole
Contact resistance: 20 mohms max
Insulation resistance: 500 Mohms min @ DC500V
Dielectric withstanding voltage: 1600 VAC for 1 minute
Environmental:
Operating temperature: −40˚C to +105˚C
Lead free, RoHS compliant.
Recommended soldering temp: 235˚C for 5 sec.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	3/06/09
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
TERMINAL BLOCK, SOCKETS FOR PLUGGABLE, STRAIGHT, 3.81MM PITCH

SIZE	PART NO.	REV.
X	EB3-XX-B-180	-

REF: S00024T | SCALE: NTS | SHEET 1 OF 1

Downloaded from Elcodis.com electronic components distributor