

6

5

4

3





2

1

Rev	AWO #	Description	Date	Appr
-	9427	RELEASED	3/06/09	

APPROVED: _____

DATE: _____ TITLE: _____

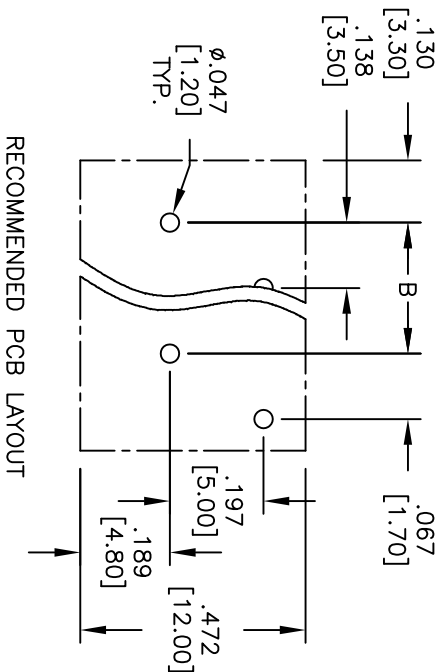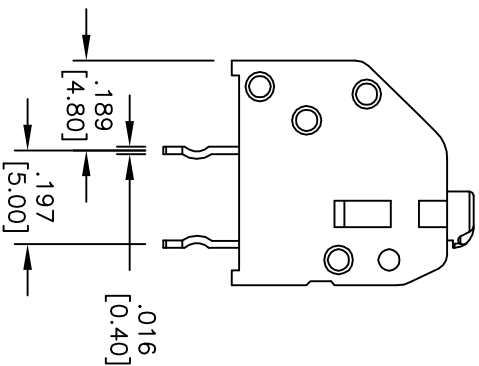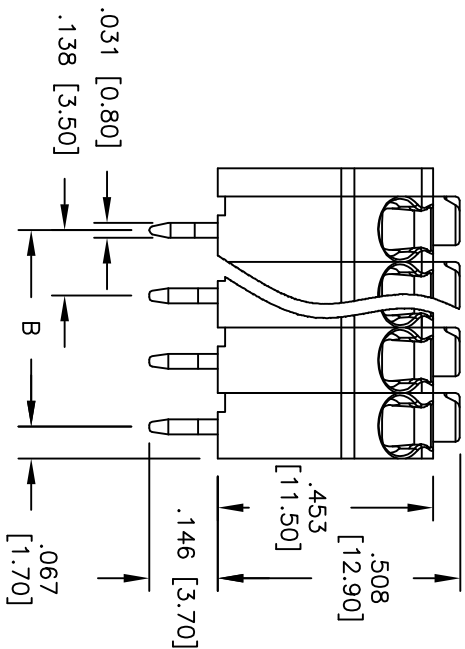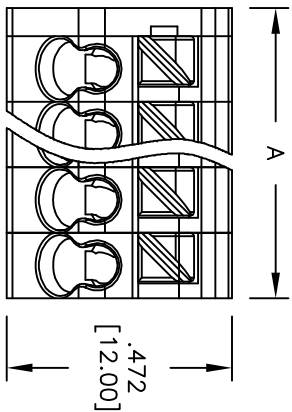

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Gray

Contact: Bronze, Tin plated

Electrical:

Operation voltage: 300 VAC max

Current rating: 6 Amps max per Pole

Mechanical:

Solid wire: 20-16 AWG

Environmental:

Operating temperature: -30°C to +105°C

Lead free, RoHS compliant.

Recommended soldering temp: 235°C for 5 sec.

Poles: 2 thru 24
 A= .138 [3.50] x No. of Poles + .059 [1.50]
 B= .138 [3.50] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]

TOLERANCES: EXCEPT AS NOTED

INCHES

Holes

APPROVALS

DATE

DRAWN

CHECKED

APPROVED

ADAM TECH

909 Railway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE

MINI TYPE, SIMPLE TYPE CAGE CLAMP TERMINAL BLOCKS,

3.50MM PITCH

SIZE

PART NO.

REV.

REF:

SCALE: NTS

SHEET 1 OF 1



6

5

4

3

2

1