



- ▶ Low current consumption
- ▶ Built in divider circuit
- ▶ 8-pin DIP Package

# ECS-300C

## DUAL OUTPUT CMOS CLOCK OSCILLATOR

# DISCONTINUED

The ECS-300C utilizes a built in divider circuit to provide a second divided output. The CMOS based oscillator features low current consumption in a standard 8-pin DIP package.

### OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS

PARAMETERS	CONDITIONS	ECS-300C			UNITS
		MIN	TYP	MAX	
Frequency Range	Primary Output	12.000		24.000	MHz
	Divided Output	0.048875		12.000	MHz
Frequency Stability *	All Conditions			± 100	ppm
Operating Temperature		-10		+70	°C
Storage Temperature		-55		+125	°C
Input Voltage	V <sub>cc</sub>	+3.0	+5.0	+5.5	VDC
Input Current				20	mA
Output Symmetry	Primary Output	40/60		60/40	%
	Divided Output	48/52		52/48	%
Rise and Fall Times				15	ns
Output Voltage	V <sub>OL</sub>			V <sub>cc</sub> x 0.1	VDC
	V <sub>OH</sub>	V <sub>cc</sub> x 0.9			VDC
Output Load	CMOS			50	pF
Startup time				1.5	ms

### POSSIBLE FREQUENCY DIVISIONS BY PART NUMBER

ECS PART NUMBER	f <sub>o</sub> CLOCK Pin 1	f <sub>o</sub> /2 <sup>n</sup> (Divided Output) PIN 2							
		1/2 * 1	1/2 * 2	1/2 * 3	1/2 * 4	1/2 * 5	1/2 * 6	1/2 * 7	1/2 * 8
ECS-300C-120	12.000 MHz	6.000 MHz	3.000 MHz	1.500 MHz	750 KHz	375 KHz	187.5 KHz	93.75 KHz	46.875 KHz
ECS-300C-160	16.000 MHz	8.000 MHz	4.000 MHz	2.000 MHz	1.000 MHz	500 KHz	250 KHz	125 KHz	62.5 KHz
ECS-300C-240	24.000 MHz	12.000 MHz	6.000 MHz	3.000 MHz	1.500 MHz	750 KHz	375 KHz	187.5 KHz	93.75 KHz

### DIMENSIONS (mm)

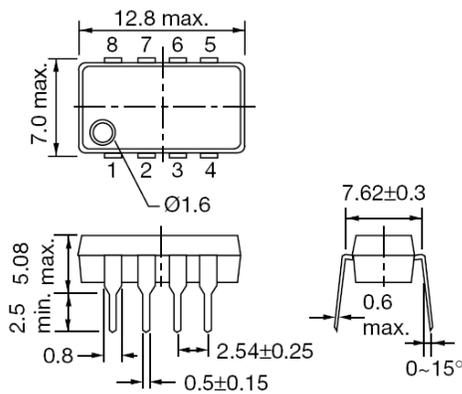


Figure 1) Top, Side and End views

Pin Connections	
#1	Output
#2	Divided Output
#3	Standby
#4	Ground
#5	A (Divider selection)
#6	B (Divider selection)
#7	C (Divider selection)
#8	V <sub>cc</sub>

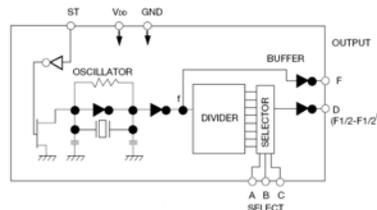



Figure 2) Block Diagram

Input			ST	Output	
Divider Selection				Pin 1(Primary Output)	Pin 2(Divided Output)
C	B	A			
L	L	L	H	f <sub>o</sub> clock	f <sub>o</sub> 1/2 * 1 clock
L	L	H	H	f <sub>o</sub> clock	f <sub>o</sub> 1/2 * 2 clock
L	H	L	H	f <sub>o</sub> clock	f <sub>o</sub> 1/2 * 3 clock
L	H	H	H	f <sub>o</sub> clock	f <sub>o</sub> 1/2 * 4 clock
H	L	L	H	f <sub>o</sub> clock	f <sub>o</sub> 1/2 * 5 clock
H	L	H	H	f <sub>o</sub> clock	f <sub>o</sub> 1/2 * 6 clock
H	H	L	H	f <sub>o</sub> clock	f <sub>o</sub> 1/2 * 7 clock
H	H	H	H	f <sub>o</sub> clock	f <sub>o</sub> 1/2 * 8 clock
X	X	X	L	L	L

### STANDARD FREQUENCIES

12.000 MHz, 12.288 MHz, 12.800 MHz, 14.31818 MHz, 14.7456 MHz, 15.9744 MHz, 16.000 MHz, 16.384 MHz, 17.734476 MHz, 18.432 MHz, 19.6608 MHz, 20.000 MHz, and 24.000 MHz

### PART NUMBERING GUIDE: Example ECS-300C-120



\* Note: Inclusive of 25°C tolerance, operating temperature, input voltage change, load change, shock and vibration.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## ECS:

[ECS-300C-18.432](#) [ECS-300C-14.31818](#) [ECS-300C-14.7456](#) [ECS-300C-19.6608](#) [ECS-300C-12.288](#) [ECS-300C-20.000](#) [ECS-300C-32.000](#) [ECS-300C-12.800](#) [ECS-300C-12.000](#) [ECS-300C-17.734475](#) [ECS-300C-16.384](#) [ECS-300C-16.000](#) [ECS300-S-4-F](#) [ECS-300C-15.9744](#) [ECS-300C-24.000](#) [ECS-.327-12.5-34B-C-TR](#)