




ECS tuning fork type crystals are used as a clock source in communication equipment, measuring instruments, microprocessors and other time management applications. Their low power consumption makes these crystals ideal for portable equipment.

ECS-3X8X, 2X6X, 1X5X




- Cost Effective
- Tight Tolerance
- Long Term Stability
- Excellent Resistance and Environmental Characteristics
- Pb Free/RoHS Compliant

DIMENSIONS (mm)

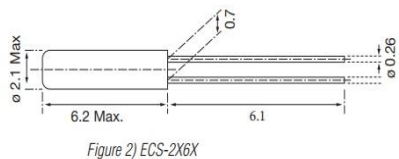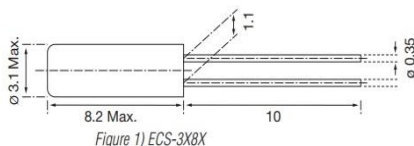

RECOMMENDED OSCILLATION CIRCUIT




ELECTRICAL CHARACTERISTICS

IC: TC 4069P
Rf: 10MΩ
Rd: 330KΩ (As required)
C₁ = 22pF, C₂ = 22pF
V_{DD} = 3.0V

In this circuit, low drive level with a maximum of 1μW is recommended. If excessive drive is applied, irregular oscillation or quartz element fractures may occur.

PARABOLIC TEMPERATURE CURVE



To determine frequency stability, use parabolic curvature. For example: What is the stability at 45°C?

- 1) Change in T (°C) = 45 - 25 = 20°C
- 2) Change in frequency = -0.04 PPM × (ΔT)² = -0.04 PPM × (20)² = -16.0 PPM

OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS

PARAMETERS		3X8X	2X6X	1X5X	UNITS
Frequency	F _O	32.768	32.768	32.768	KHz
Frequency Tolerance	Δf/fo	±20	±20	± 20	ppm
Load Capacitance	C _L	12.5	12.5	8.0	pF
Drive Level (max)	D _L	1	1	1	μW
Resistance At Series Resonance	R ₁	35(max)	35(max)	40(max)	KΩ
Q-Factor	Q	90,000(typ.)	70,000(typ.)	80,000(typ.)	
Turnover Temperature	T _M	+25 ±5	+25 ±5	+25 ±5	°C
Temperature Coefficient	β	-0.040ppm/°C ² max.	-0.040ppm/°C ² max.	-0.040ppm/°C ² max.	PPM/ΔC°
Shunt Capacitance	C _O	1.60 (typ.)	1.35 (typ.)	1.00 (typ.)	pF
Capacitance Ratio		460 (typ.)	450 (typ.)	400 (typ.)	
Operating Temp	T _{opr}	-10 ~ +60			°C
Storage Temperature	T _{stg}	-40 ~ +85			°C
Shock Resistance		Drop 3 times on hard wooden board from height of 75cm / ±5 ppm max.			PPM
Insulation Resistance	IR	500 MΩ min./DC100V			MΩ
Aging (First Year)	Δf/fo	±3 ppm max. @ +25°C ±3°C			ppm
Motional Capacitance	C ₁	0.0035(typ.)	0.0030(typ.)	0.0025(typ.)	pF

PART NUMBERING GUIDE:

Manufacturer	Frequency	Load Capacitance	Package Type*
ECS	.327	12.5	8X
ECS	.327	12.5	13X
ECS	.327	12.5	14X

* Package type examples (8X = 3x8, 13X = 2x6, 14X = 1x5)

SOLDER PROFILE
Peak solder Temp +260°C Max 10 sec Max.
2 Cycles Max.
MSL 1, Lead Finish Sn/Cu Matte

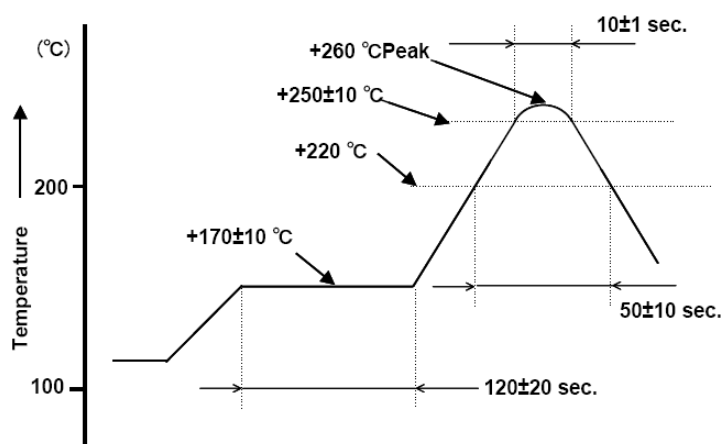


Figure 1) Suggested Solder Profile

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ECS:

[ECS-3X8X](#) [ECS-1X5/ECS-.327-8-14X](#) [ECS-.327-12.5-13X](#) [ECS-.327-6-13X](#) [ECS-.327-8-14X](#) [ECS-10-8-14](#) [ECS-1X5/ECS-.327-8-14](#) [ECS-3X8/ECS-.327-12.5-8](#) [ECS-2X6-FL](#)