


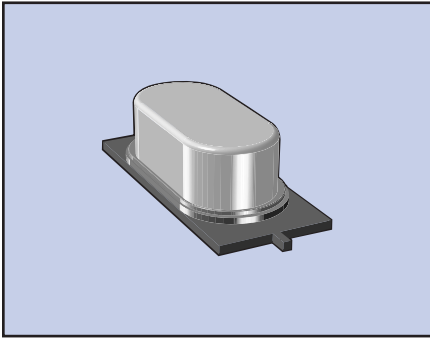

The CSM-7 is an excellent choice for the SMD version of the HC-49US leaded crystal. The CSM-7 has a case height of 4.3 mm maximum in a resistance weld metal package. A package profile of 3.2 mm maximum is also available.

## FEATURES

- Cost effective
- Space saving design
- Low profile
- Tape & Reel (1,000 pcs)

## PART NUMBERING GUIDE "EXAMPLE"

|     | FREQUENCY (16.0000 MHz) | LOAD CAPACITANCE* | PACKAGE TYPE** |
|-----|-------------------------|-------------------|----------------|
| ECS | - 160                   | - 20              | - 5P           |

\* Load capacitance (xx=xx pF, S= series resonance), \*\* Package Type examples (-5P= 4.3mm max. height, -5PL= 3.2mm max. height)  
For extended temp range of -40 to +85°C add -DN suffix for example ECS-160-20-5P-DN  
Note: See Product Selection Guide for additional options.

## OPERATING CONDITIONS/ELECTRICAL CHARACTERISTICS

| PARAMETERS                              | CONDITIONS                          | MINIMUM | TYPICAL       | MAXIMUM | UNITS |
|-----------------------------------------|-------------------------------------|---------|---------------|---------|-------|
| FREQUENCY RANGE                         | $f_0$                               | 3.57    |               | 70.000  | MHz   |
| FREQUENCY TOLERANCE                     | @ +25°C                             |         |               | ±30     | PPM   |
| FREQUENCY STABILITY, ref @ 25°C         | Standard -10 +70°C                  |         |               | ±50     | PPM   |
|                                         | "DN" Option -40 +85°C               |         |               | ±100    | PPM   |
| OPERATING TEMPERATURE                   | Standard                            | -10     |               | +70     | °C    |
|                                         | "DN" Option                         | -40     |               | +85     | °C    |
| STORAGE TEMPERATURE (T <sub>STG</sub> ) | T <sub>STG</sub>                    | -40     |               | +105    | °C    |
| SHUNT CAPACITANCE (C <sub>0</sub> )     | C <sub>0</sub>                      |         |               | 7.0     | pF    |
| LOAD CAPACITANCE (C <sub>L</sub> )      | C <sub>L</sub> (Customer Specified) | 10      | 20.0 standard | Series  | pF    |
| DRIVE LEVEL                             | 3.570 - 70.000 MHz                  |         |               | 0.5     | mW    |
| AGING (FIRST YEAR)                      | @ +25°C                             |         |               | ±5.0    | PPM   |

## EQUIVALENT SERIES RESISTANCE

| FREQUENCY RANGE (MHz) | MODE        | MAX ESR Ω | FREQUENCY RANGE (MHz) | MODE        | MAX ESR Ω |
|-----------------------|-------------|-----------|-----------------------|-------------|-----------|
| 3.570 ~ 4.999         | Fundamental | 150       | 13.000 ~ 19.000       | Fundamental | 40        |
| 5.000 ~ 5.999         | Fundamental | 80        | 20.000 ~ 29.000       | Fundamental | 30        |
| 6.000 ~ 6.999         | Fundamental | 70        | 26.000 ~ 39.999       | 3rd O/T     | 100       |
| 7.000 ~ 8.999         | Fundamental | 60        | 40.000 ~ 70.000       | 3rd O/T     | 80        |
| 9.000 ~ 12.999        | Fundamental | 50        |                       |             |           |

## PACKAGE DIMENSIONS (mm)

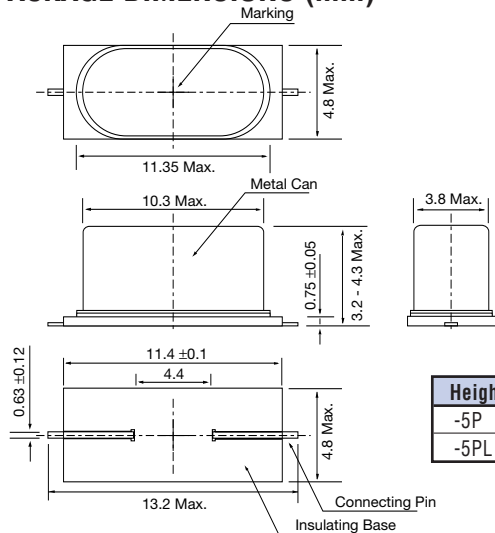


Figure 1) CSM-7 - Top, Side, Bottom and End views

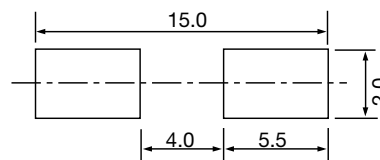


Figure 2) CSM-7 Land Pattern - Bottom view

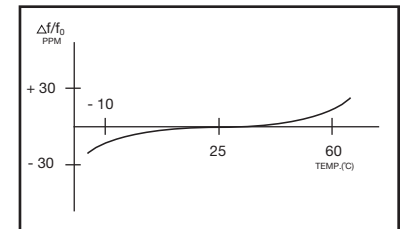


Figure 3) Frequency vs Temperature Curve

| Height "H" (max.) |        |
|-------------------|--------|
| -5P               | 4.3 mm |
| -5PL              | 3.2 mm |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## ECS:

[ECS-100-18-5P-TR](#) [ECS-36-20-5P-TR](#) [ECS-196.6-S-5P-TR](#) [ECS-200-20-5P-TR](#) [ECS-98.3-20-5P-TR](#) [ECS-184-18-5P-TR](#) [ECS-73-S-5P-TR](#) [ECS-52-S-5P-TR](#) [ECS-110.5-32-5P-TR](#) [ECS-184-S-5P-TR](#) [ECS-80-S-5P-TR](#) [ECS-147.4-S-5P-TR](#) [ECS-40.3-20-5P-TR](#) [ECS-92.1-20-5P-TR](#) [ECS-184-20-5P-TR](#) [ECS-147.4-20-5P-TR](#) [ECS-122.8-S-5P-TR](#) [ECS-245.7-20-5P-TR](#) [ECS-240-16-5P-TR](#) [ECS-200-S-5P-TR](#) [ECS-36-S-5P-TR](#) [ECS-51-20-5P-TR](#) [ECS-44-20-5P-TR](#) [ECS-98.3-S-5P-TR](#) [ECS-36-20-5PDN-TR](#) [ECS-42-16-5P-TR](#) [ECS-120-S-5P-TR](#) [ECS-61-32-5P-TR](#) [ECS-204.8-20-5P-TR](#) [ECS-180-S-5P-TR](#) [ECS-52-32-5P-TR](#) [ECS-40-20-5P-TR](#) [ECS-122.8-20-5P-TR](#) [ECS-120-32-5P-TR](#) [ECS-110.5-S-5P-TR](#) [ECS-480-20-5P-TR](#) [ECS-162.5-20-5P-TR](#) [ECS-110-S-5P-TR](#) [ECS-73-20-5P-TR](#) [ECS-160-20-5P-TR](#) [ECS-92.1-S-5P-TR](#) [ECS-80-18-5P-TR](#) [ECS-41-20-5P-TR](#) [ECS-42-12-5P-TR](#) [ECS-150-S-5P-TR](#) [ECS-240-20-5P-TR](#) [ECS-160-S-5P-TR](#) [ECS-51-S-5P-TR](#) [ECS-49-20-5P-TR](#) [ECS-120-18-5P-TR](#) [ECS-110.5-20-5P-TR](#) [ECS-35-17-5P-TR](#) [ECS-50-20-5P-TR](#) [ECS-59.9-20-5P-TR](#) [ECS-40.3-S-5P-TR](#) [ECS-49-S-5P-TR](#) [ECS-162.5-S-5P-TR](#) [ECS-100-S-5P-TR](#) [ECS-50-S-5P-TR](#) [ECS-60-S-5P-TR](#) [ECS-40-S-5P-TR](#) [ECS-143-S-5P-TR](#) [ECS-80-32-5P-TR](#) [ECS-60-32-5P-TR](#) [ECS-143-20-5P-TR](#) [ECS-35-S-5P-TR](#) [ECS-60-32-5P-DN-TR](#) [ECS-240.001-18-5P-TR](#) [ECS-120-20-5P-DN-TR](#) [ECS-160.003-18-5P-TR](#) [ECS-35-17-5P-DN-TR](#) [ECS-120.003-18-5P-TR](#) [ECS-143-20-5P-DN-TR](#) [ECS-73-20-5P-DN-TR](#) [ECS-40-20-5P-DN-TR](#) [ECS-200-20-5P-DN-TR](#)