
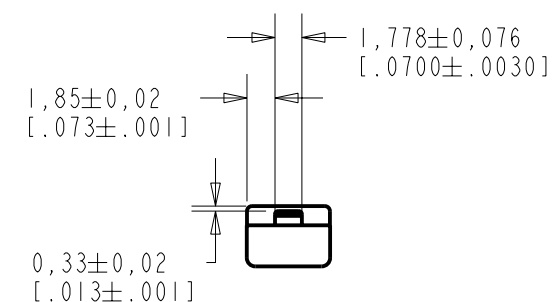

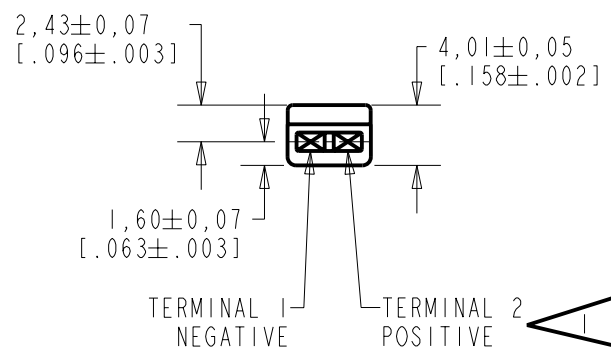


EF-26418-000

SHT 1.1

NOTES:

- 1 A POSITIVE GOING VOLTAGE AT TERMINAL 2, RELATIVE TO TERMINAL 1, CAUSES A DECREASE IN PRESSURE AT THE SOUND OUTLET.
- 2 LOCATED FROM TWO SURFACES FOR CUSTOMER CONVENIENCE. ONLY APPLICABLE FROM ONE SURFACE, NOT TO BE USED TOGETHER. HORIZONTAL LOCATION FOR TERMINAL CENTERED TO $\pm 0,17$ [.007].

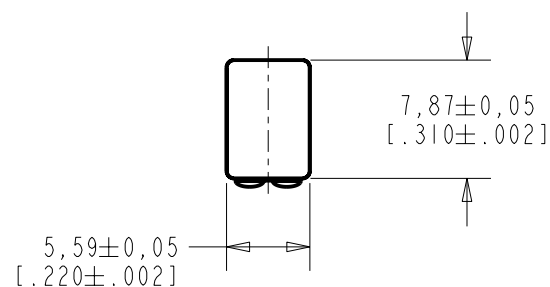


NOMINAL WEIGHT
.66 GRAM

DIMENSIONS IN MILLIMETERS [INCHES]

KNOWLES ELECTRONICS
ITASCA, ILLINOIS U.S.A.

Revision	C.O. #	Implementation Date	RELEASE LEVEL	REVISION
B	C10105798	5-2-07	Released	B
A	C10103441	11-17-05		
SCALE: 2:1			DR. BY DATE	
DO NOT SCALE DRAWING			MMM 11-17-05	
TITLE: RECEIVER			CK. BY DATE	
OUTLINE DRAWING			GJP 11-22-05	
EF-26418-000			APP. BY DATE	
SHT 1.1			GJP 11-22-05	

NO DAMPING

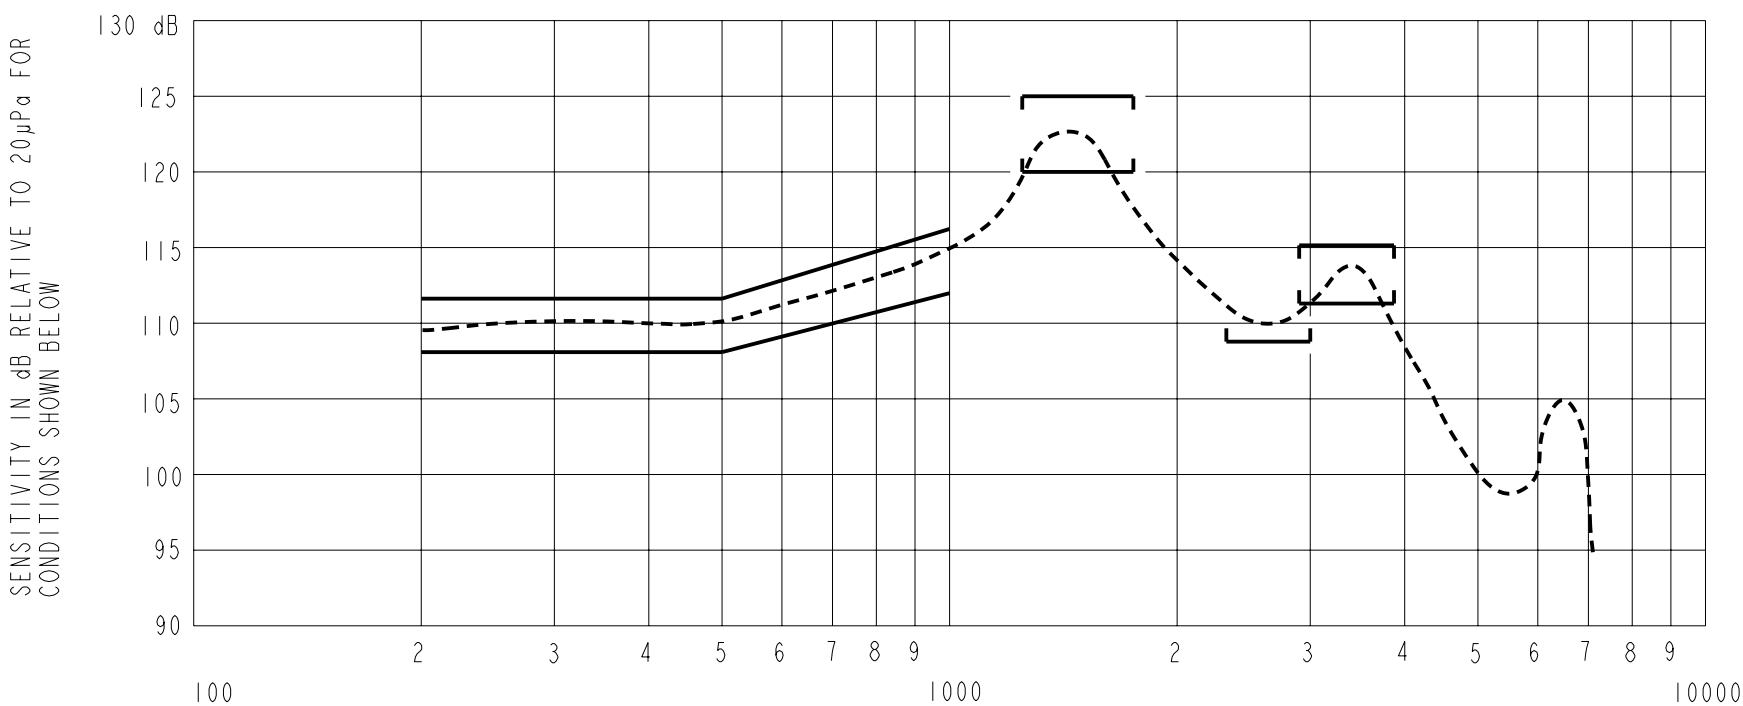

SENSITIVITY		
FREQUENCY	MIN.	MAX.
200	108.0	112.0
500	108.0	112.0
1000	112.5	116.5
1250-1750	120.0	125.0
2300-3000	108.5	---
2900-3900	111.5	115.5

3. RESPONSE, IMPEDANCE, AND DISTORTION MEASUREMENTS MADE USING THE ELECTRICAL TEST CONDITIONS SHOWN BELOW.
4. ELECTRICAL SOURCE IMPEDANCE MUST BE GREATER THAN 20 TIMES 1KHz IMPEDANCE FOR TEST CONDITIONS SHOWN BELOW.
5. INDIVIDUAL SPECIFICATIONS.

PORT LOCATION	IMPEDANCE OHMS ±15%		DCR @20°C OHMS ±10%	DISTORTION		ELECTRICAL TEST CONDITIONS	
	1KHz	500Hz		MAX. %	FREQ Hz	AC mA RMS	DC mA
12N	377	140	46	10	500	1.67	0.00

Revision	C.O. #	Implementation Date	RELEASE LEVEL		REVISION
B	C10105798	5-2-07	Released		B
A	C10103441	11-17-05			
WHEN TEST LIMITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION CRITERIA, CORRELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR ELIMINATION OF EQUIPMENT AND TEST METHOD VARIATION			DR. BY		DATE
			MMM		11-17-05
TITLE: RECEIVER			CK. BY		DATE
			GJP		11-22-05
PERFORMANCE SPECIFICATION			APP. BY		DATE
			GJP		11-22-05

KNOWLES ELECTRONICS
ITASCA, ILLINOIS U.S.A.

EF-26418-000
SHT 2.1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Knowles:](#)

[EF-26418-000](#)