


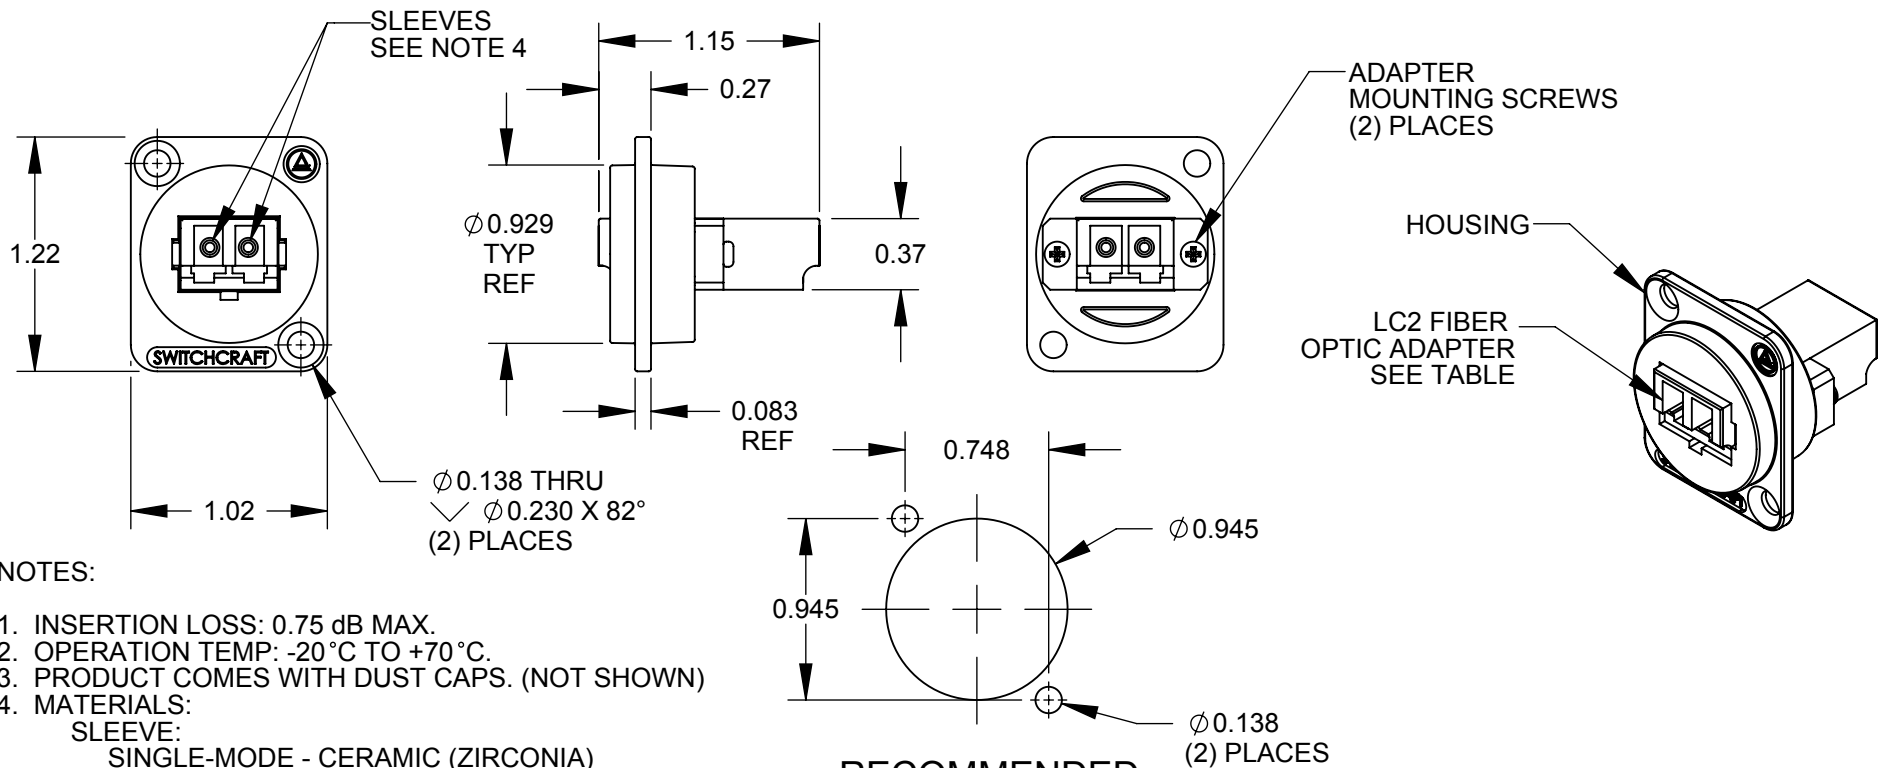

NOTES:

1. INSERTION LOSS: 0.75 dB MAX.
2. OPERATION TEMP: -20°C TO +70°C.
3. PRODUCT COMES WITH DUST CAPS. (NOT SHOWN)
4. MATERIALS:
 SLEEVE:
 SINGLE-MODE - CERAMIC (ZIRCONIA)
 MULTI-MODE - PHOSPHORUS BRONZE
 HOUSING - DELRIN, BLACK
 ADAPTER - THERMOPLASTIC
 SCREWS - STEEL, NICKEL PLATED
 ADAPTER MOUNTING CLIPS - STAINLESS STEEL
5. FOR MOUNTING SCREWS TO BE SHIPPED WITH ASSEMBLY AND INDIVIDUALING PACKAGING, ADD SUFFIX -PKG TO PART NUMBER.
6. WHEN MOUNTING ASSEMBLY, USE A SCREW TORQUE OF 10 INCH-POUNDS MAXIMUM.
7. THIS PRODUCT IS RoHS COMPLIANT.

PART NUMBER	LC2 ADAPTER	ADAPTER COLOR
EHLC2	SINGLE-MODE	BLUE
EHLC2M	MULTI-MODE	BEIGE

CUSTOMER DRAWING

					UNLESS OTHERWISE SPECIFIED 1. ALL DIMENSIONS IN INCHES - TWO PLACE DECIMALS ±0.02 - THREE PLACE DECIMALS ±0.005	THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.											
						SIZE	WIDTH		MULT		LBS/M		TEMPER				
						FINISH						MATERIAL					
						SPEC No.						SPEC No.					
						FIRST USED ON				SCALE				Switchcraft®			
										1:1							
						DATE DRAWN	BY	CHKD		APVD		SHEET 1 OF 1					
A	26348	2/27/09	RS	TJK	5/12/08	JGK	RS		TJK								
							5/21/09		7/16/09								
REV	ECO NUMBER	DATE	BY	APVD			NAME						PART No.		REV		
REVISIONS					DO NOT SCALE DRAWING		E SERIES LC/LC FIBER OPTIC ADAPTER, RoHS						EHLC2 SERIES		A		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Switchcraft:](#)

[EHLC2](#) [EHLC2M](#)