

Micropower Single Supply Rail-to-Rail Input-Output Precision Op Amp

The EL8176 is a precision low power, operational amplifier. The device is optimized for single supply operation between 2.4V to 5.5V.

The EL8176 draws minimal supply current while meeting excellent DC-accuracy noise and output drive specifications. Competing devices seriously degrade these parameters to achieve micropower supply current.

The EL8176 can be operated from one lithium cell or two Ni-Cd batteries. The input range includes both positive and negative rail. The output swings to both rails.

Ordering Information

| PART NUMBER | PART MARKING | PACKAGE (Pb-Free) | PKG. DWG. # |
|----------------------------|--------------|-----------------------------|-------------|
| EL8176FWZ-T7* (Note 1) | BBVA | 6 Ld SOT-23 | MDP0038 |
| EL8176FWZ-T7A* (Note 1) | BBVA | 6 Ld SOT-23 | MDP0038 |
| EL8176FSZ (Note 1) | 8176FSZ | 8 Ld SO | MDP0027 |
| EL8176FSZ-T7* (Note 1) | 8176FSZ | 8 Ld SO | MDP0027 |
| EL8176FIZ-T7* (Note 2) | 176Z | 6 Ld WLCSP (1.5mmx1.0mm) | W3x2.6C |

*Please refer to TB347 for details on reel specifications.

NOTES:

- These Intersil Pb-free plastic packaged products employ special Pb-free material sets, molding compounds/die attach materials, and 100% matte tin plate plus anneal (e3 termination finish, which is RoHS compliant and compatible with both SnPb and Pb-free soldering operations). Intersil Pb-free products are MSL classified at Pb-free peak reflow temperatures that meet or exceed the Pb-free requirements of IPC/JEDEC J STD-020.
- These Intersil Pb-free WLCSP and BGA packaged products employ special Pb-free material sets; molding compounds/die attach materials and SnAgCu - e1 solder ball terminals, which are RoHS compliant and compatible with both SnPb and Pb-free soldering operations. Intersil Pb-free WLCSP and BGA packaged products are MSL classified at Pb-free peak reflow temperatures that meet or exceed the Pb-free requirements of IPC/JEDEC J STD-020.




Features

- 55µA supply current
- 100µV max offset voltage (8 Ld SO)
- 2nA input bias current
- 400kHz gain-bandwidth product
- Single supply operation down to 2.4V
- Rail-to-rail input and output
- Output sources 31mA and sinks 26mA load current
- Pb-free plus (RoHS compliant)

Applications

- Battery- or solar-powered systems
- 4mA to 20mA current loops
- Handheld consumer products
- Medical devices
- Thermocouple amplifiers
- Photodiode pre amps
- pH probe amplifiers

Pinouts

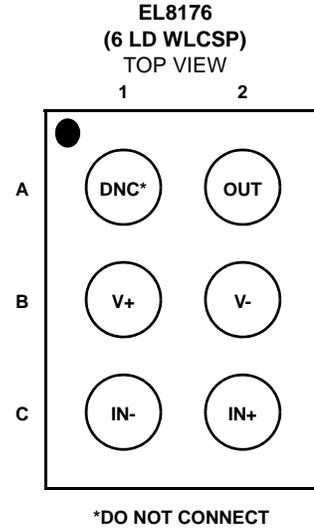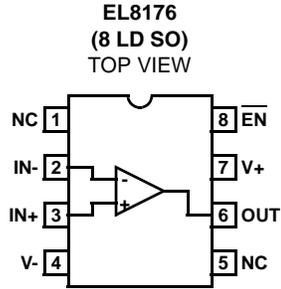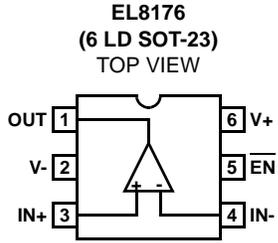

Absolute Maximum Ratings ($T_A = +25^{\circ}\text{C}$)

| | |
|---|--------------------------|
| Supply Voltage (V_S) and Pwr-up Ramp Rate | 5.75V, 1V/ μs |
| Differential Input Voltage | 0.5V |
| Current into IN+, IN-, and $\bar{E}N$. | 5mA |
| Input Voltage | V- - 0.5V to V+ + 0.5V |
| ESD Tolerance | |
| Human Body Model | .3kV |
| Machine Model | .300V |

Thermal Information

| | |
|---|---|
| Thermal Resistance (Typical, Note 3) | θ_{JA} ($^{\circ}\text{C}/\text{W}$) |
| 6 Ld SOT-23 Package | 230 |
| 6 Ld WLCSP Package | 130 |
| 8 Ld SO Package | 125 |
| Ambient Operating Temperature Range | -40 $^{\circ}\text{C}$ to +125 $^{\circ}\text{C}$ |
| Storage Temperature Range | -65 $^{\circ}\text{C}$ to +150 $^{\circ}\text{C}$ |
| Operating Junction Temperature | +125 $^{\circ}\text{C}$ |
| Pb-free reflow profile | see link below |
| http://www.intersil.com/pbfree/Pb-FreeReflow.asp | |

CAUTION: Do not operate at or near the maximum ratings listed for extended periods of time. Exposure to such conditions may adversely impact product reliability and result in failures not covered by warranty.

NOTES:

- θ_{JA} is measured with the component mounted on a high effective thermal conductivity test board in free air. See Tech Brief TB379 for details.

IMPORTANT NOTE: All parameters having Min/Max specifications are guaranteed. Typical values are for information purposes only. Unless otherwise noted, all tests are at the specified temperature and are pulsed tests, therefore: $T_J = T_C = T_A$

Electrical Specifications $V_+ = 5\text{V}$, $V_- = 0\text{V}$, $V_{CM} = 2.5\text{V}$, $R_L = \text{Open}$, $V_{EN} = 0\text{V}$, $T_A = +25^{\circ}\text{C}$ unless otherwise specified.
Boldface limits apply over the operating temperature range, -40 $^{\circ}\text{C}$ to +125 $^{\circ}\text{C}$. Temperature data established by characterization.

| PARAMETER | DESCRIPTION | CONDITIONS | MIN (Note 4) | TYP | MAX (Note 4) | UNIT |
|--|--|--|--|-----------|-----------------|--------------------------------|
| DC SPECIFICATIONS | | | | | | |
| V_{OS} | Input Offset Voltage | 8 Ld SO | -100 | ± 25 | 100 | μV |
| | | | -220 | | 220 | μV |
| | | 6 Ld SOT-23 | -350 | ± 80 | 350 | μV |
| | | | -350 | | 350 | μV |
| | | WLCSP | -500 | -75 | 500 | μV |
| $\frac{\Delta V_{OS}}{\Delta \text{Time}}$ | Long Term Input Offset Voltage Stability | | | 2.4 | | $\mu\text{V}/\text{Mo}$ |
| $\frac{\Delta V_{OS}}{\Delta T}$ | Input Offset Drift vs Temperature | | | 0.7 | | $\mu\text{V}/^{\circ}\text{C}$ |
| I_{OS} | Input Offset Current | | -1 | ± 0.4 | 1 | nA |
| | | | -4 | | 4 | nA |
| I_B | Input Bias Current | | -2 | ± 0.5 | 2 | nA |
| | | | -5 | | 5 | nA |
| CMIR | Input Voltage Range | Guaranteed by CMRR test | 0 | | 5 | V |
| CMRR | Common-Mode Rejection Ratio | $V_{CM} = 0\text{V}$ to 5V | 90 | 110 | | dB |
| | | | 90 | | | dB |
| PSRR | Power Supply Rejection Ratio | $V_S = 2.4\text{V}$ to 5.5V | 90 | 110 | | dB |
| | | | 90 | | | dB |
| A_{VOL} | Large Signal Voltage Gain | $V_O = 0.5\text{V}$ to 4.5V, $R_L = 100\text{k}\Omega$ | 200 | 500 | | V/mV |
| | | | 200 | | | V/mV |
| | | | $V_O = 0.5\text{V}$ to 4.5V, $R_L = 1\text{k}\Omega$ | | 25 | |

EL8176

Electrical Specifications $V_+ = 5V$, $V_- = 0V$, $V_{CM} = 2.5V$, $R_L = \text{Open}$, $V_{EN} = 0V$, $T_A = +25^\circ\text{C}$ unless otherwise specified.
Boldface limits apply over the operating temperature range, -40°C to $+125^\circ\text{C}$. Temperature data established by characterization. **(Continued)**

| PARAMETER | DESCRIPTION | CONDITIONS | MIN (Note 4) | TYP | MAX (Note 4) | UNIT |
|--------------------------------------|---|--|-----------------|------------|-----------------|---------------|
| V_{OUT} | Maximum Output Voltage Swing SOT-23/SO-8 | VOL; Output low, $R_L = 100k\Omega$ | | 3 | 8 | mV |
| | | | | | 10 | mV |
| | | VOL; Output low, $R_L = 1k\Omega$ | | 130 | 200 | mV |
| | | | | | 300 | mV |
| | | VOH; Output high, $R_L = 100k\Omega$ | 4.994 | 4.997 | | V |
| | | | 4.992 | | | V |
| | VOH; Output high, $R_L = 1k\Omega$ | 4.750 | 4.867 | | V | |
| | | 4.7 | | | V | |
| | Maximum Output Voltage Swing WLCSP | VOL; Output low, $R_L = 100k\Omega$ | | 3 | 8 | mV |
| | | | | | 10 | mV |
| VOL; Output low, $R_L = 1k\Omega$ | | | 130 | 200 | mV | |
| | | | | 300 | mV | |
| VOH; Output high, $R_L = 100k\Omega$ | | 4.991 | 4.997 | | V | |
| | | 4.750 | 4.867 | | V | |
| | 4.7 | | | V | | |
| $I_{S,ON}$ | Supply Current, Enabled | $V_{EN} = 5V$, SOT-23/SO-8 | 35 | 55 | 75 | μA |
| | | | 30 | | 90 | μA |
| | | $V_{EN} = 5V$, WLCSP | 60 | 85 | 110 | μA |
| | | | 55 | | 120 | μA |
| $I_{S,OFF}$ | Supply Current, Disabled | $V_{EN} = 0V$, SOT-23/SO-8 only | | 3 | 10 | μA |
| | | | | | 10 | μA |
| I_{O+} | Short Circuit Output Sourcing Current | $R_L = 10\Omega$ | 18 | 31 | | mA |
| | | | 18 | | | mA |
| I_{O-} | Short Circuit Output Sinking Current | $R_L = 10\Omega$ | 17 | 26 | | mA |
| | | | 15 | | | mA |
| V_S | Supply Voltage | Guaranteed by PSRR test | 2.4 | | 5.5 | V |
| | | | 2.4 | | 5.5 | V |
| V_{INH} | Enable Pin High Level | SOT-23 and SO packages only | 2 | | | V |
| V_{INL} | Enable Pin Low Level | SOT-23 and SO packages only | | | 0.8 | V |
| I_{ENH} | Enable Pin Input Current | $V_{EN} = 5V$, SOT-23 and SO packages only | 0.25 | 0.7 | 2.0 | μA |
| | | | | | 2.5 | μA |
| I_{ENL} | Enable Pin Input Current | $V_{EN} = 0V$, SOT-23 and SO packages only | -0.5 | 0 | +0.5 | μA |
| | | | -1 | | +1 | μA |
| AC SPECIFICATIONS | | | | | | |
| GBW | Gain Bandwidth Product | $A_V = 100$, $R_F = 100k\Omega$, $R_L = 10k\Omega$, $R_G = 1k\Omega$ to V_{CM} | | 400 | | kHz |
| Unity Gain Bandwidth | -3dB Bandwidth | $A_V = 1$, $R_F = 0\Omega$, $R_L = 100k\Omega$ to V_{CM} , $V_{OUT} = 10mV_{P-P}$ | | 1 | | MHz |

Electrical Specifications $V_+ = 5V, V_- = 0V, V_{CM} = 2.5V, R_L = \text{Open}, V_{EN} = 0V, T_A = +25^\circ\text{C}$ unless otherwise specified.
Boldface limits apply over the operating temperature range, -40°C to $+125^\circ\text{C}$. Temperature data established by characterization. **(Continued)**

| PARAMETER | DESCRIPTION | CONDITIONS | MIN (Note 4) | TYP | MAX (Note 4) | UNIT |
|---------------------------|--|--|-------------------------------|------------|-----------------------------|------------------------------|
| e_N | Input Noise Voltage Peak-to-Peak | $f = 0.1\text{Hz to } 10\text{Hz}, R_L = 10\text{k}\Omega \text{ to } V_{CM}$ | | 1.5 | | μV_{P-P} |
| | Input Noise Voltage Density | $f_O = 1\text{kHz}$ | | 28 | | $\text{nV}/\sqrt{\text{Hz}}$ |
| i_N | Input Noise Current Density | $f_O = 1\text{kHz}$ | | 0.16 | | $\text{pA}/\sqrt{\text{Hz}}$ |
| ISO | Off-State Input to Output Isolation | $V_{EN} = 5V, f_O = 1\text{kHz}, A_V = +1, V_{IN} = 1V_{P-P}$ SOT-23 and SO packages only | | -73 | | dB |
| CMRR | Input Common Mode Rejection Ratio | $f_O = 120\text{Hz}; V_{CM} = 1V_{P-P}$ | | -70 | | dB |
| PSRR+ | Power Supply Rejection Ratio (V_+) | $f_O = 120\text{Hz}; V_+, V_- = \pm 2.5V,$ $V_{SOURCE} = 1V_{P-P}$ | | -90 | | dB |
| PSRR- | Power Supply Rejection Ratio (V_-) | $f_O = 120\text{Hz}; V_+, V_- = \pm 2.5V,$ $V_{SOURCE} = 1V_{P-P}$ | | -70 | | dB |
| TRANSIENT RESPONSE | | | | | | |
| SR | Slew Rate | | ± 0.065 | ± 0.13 | ± 0.3 | $\text{V}/\mu\text{s}$ |
| t_r, t_f , Large Signal | Rise Time, 10% to 90%, V_{OUT} | $A_V = +2, V_{OUT} = 2V_{P-P}, R_g = R_f = R_L = 10\text{k}\Omega$ to V_{CM} | | 18 | | μs |
| | Fall Time, 90% to 10%, V_{OUT} | $A_V = +2, V_{OUT} = 2V_{P-P}, R_g = R_f = R_L = 10\text{k}\Omega$ to V_{CM} | | 19 | | μs |
| t_r, t_f , Small Signal | Rise Time, 10% to 90%, V_{OUT} | $A_V = +2, V_{OUT} = 10\text{mV}_{P-P},$ $R_g = R_f = R_L = 10\text{k}\Omega$ to V_{CM} | | 2.4 | | μs |
| | Fall Time, 90% to 10%, V_{OUT} | $A_V = +2, V_{OUT} = 10\text{mV}_{P-P},$ $R_g = R_f = R_L = 10\text{k}\Omega$ to V_{CM} | | 2.4 | | μs |
| t_{EN} | Enable to Output Turn-on Delay Time, 10% \overline{EN} to 10% V_{OUT} (SOT-23, SO packages) | $V_{EN} = 5V \text{ to } 0V, A_V = +2,$ $R_g = R_f = R_L = 10\text{k}\Omega$ to V_{CM} | | 4 | | μs |
| | Enable to Output Turn-off Delay Time, 10% \overline{EN} to 10% V_{OUT} (SOT-23, SO packages) | $V_{EN} = 0V \text{ to } 5V, A_V = +2,$ $R_g = R_f = R_L = 10\text{k}\Omega$ to V_{CM} | | 0.1 | | μs |

NOTE:

- Parameters with MIN and/or MAX limits are 100% tested at $+25^\circ\text{C}$, unless otherwise specified. Temperature limits established by characterization and are not production tested.

Typical Performance Curves

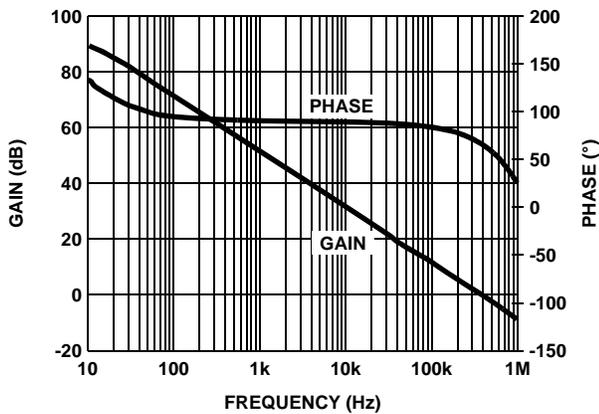


FIGURE 1. A_{VOL} vs FREQUENCY @ $1\text{k}\Omega$ LOAD

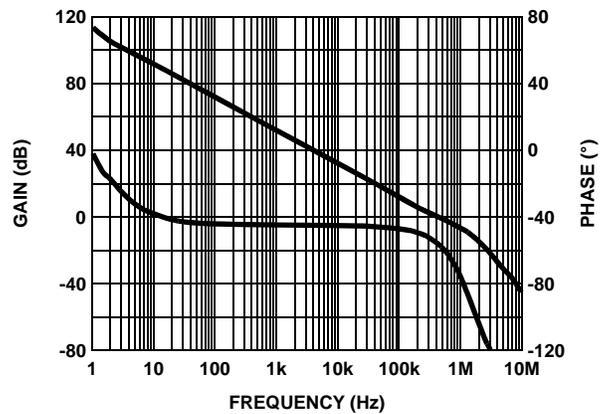


FIGURE 2. A_{VOL} vs FREQUENCY @ $100\text{k}\Omega$ LOAD

Typical Performance Curves (Continued)

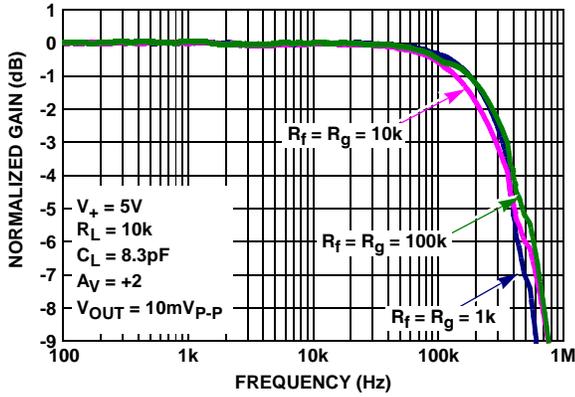


FIGURE 3. GAIN vs FREQUENCY vs FEEDBACK RESISTOR VALUES R_f/R_g

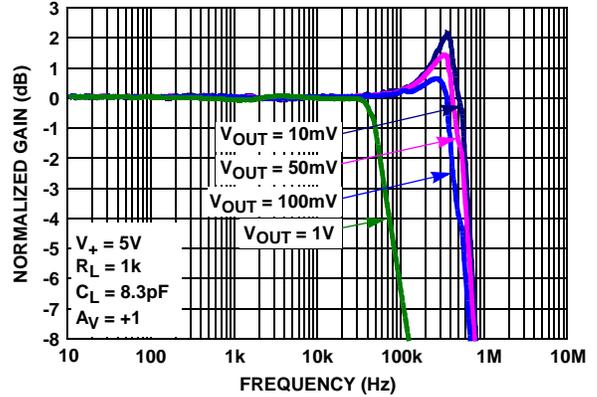


FIGURE 4. GAIN vs FREQUENCY vs V_{OUT} , $R_L = 1k$

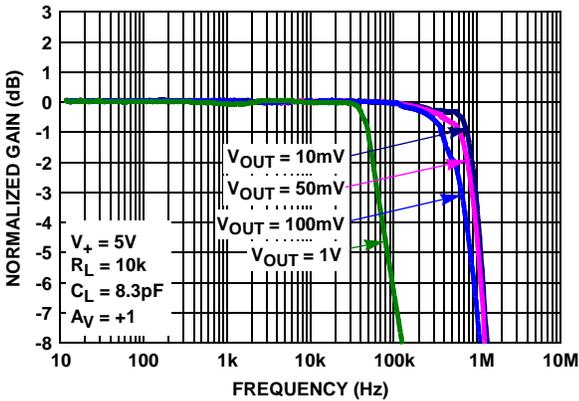


FIGURE 5. GAIN vs FREQUENCY vs V_{OUT} , $R_L = 10k$

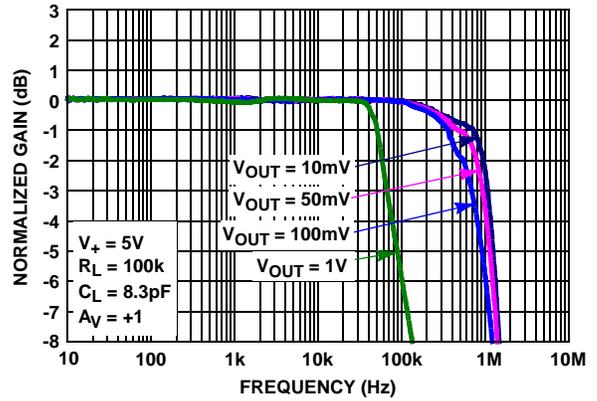


FIGURE 6. GAIN vs FREQUENCY vs V_{OUT} , $R_L = 100k$

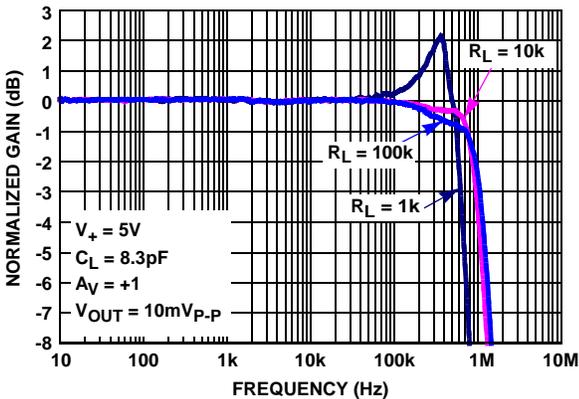


FIGURE 7. GAIN vs FREQUENCY vs R_L

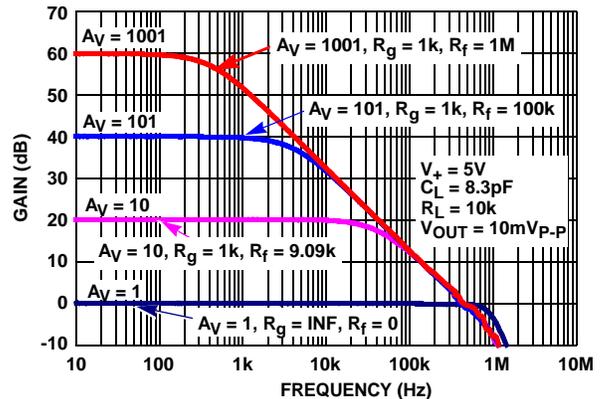


FIGURE 8. FREQUENCY RESPONSE vs CLOSED LOOP GAIN

Typical Performance Curves (Continued)

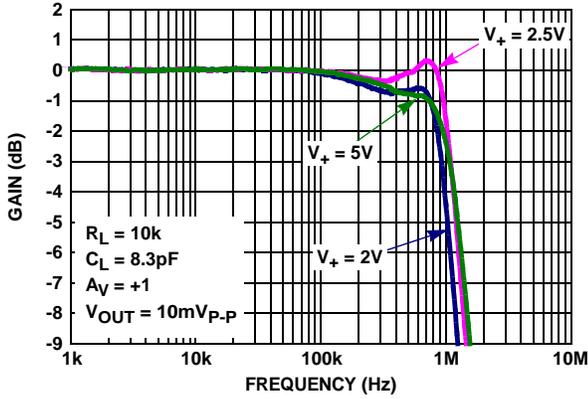


FIGURE 9. GAIN vs FREQUENCY vs SUPPLY VOLTAGE

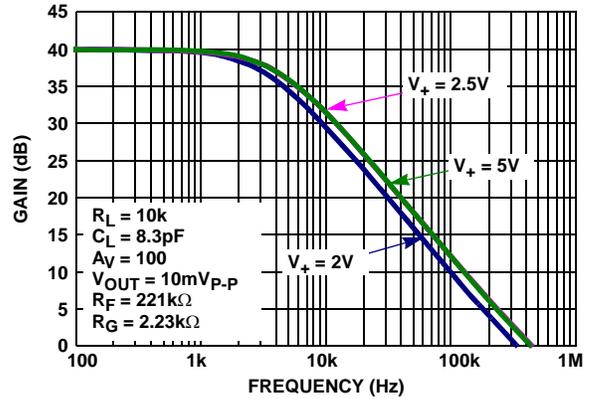


FIGURE 10. GAIN vs FREQUENCY vs SUPPLY VOLTAGE

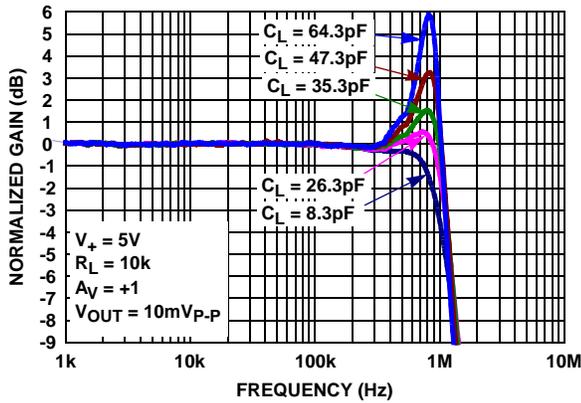


FIGURE 11. GAIN vs FREQUENCY vs C_L

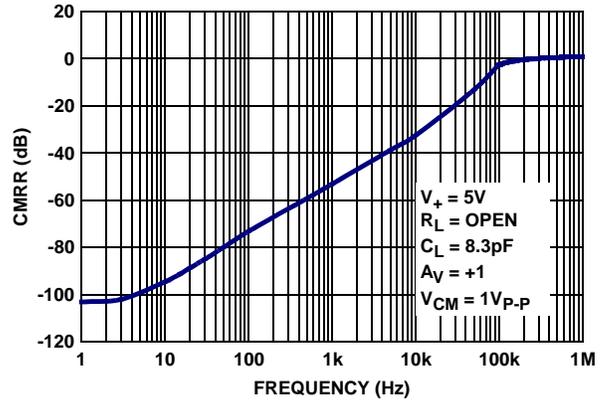


FIGURE 12. CMRR vs FREQUENCY; V_+ , $V_- = \pm 2.5V$

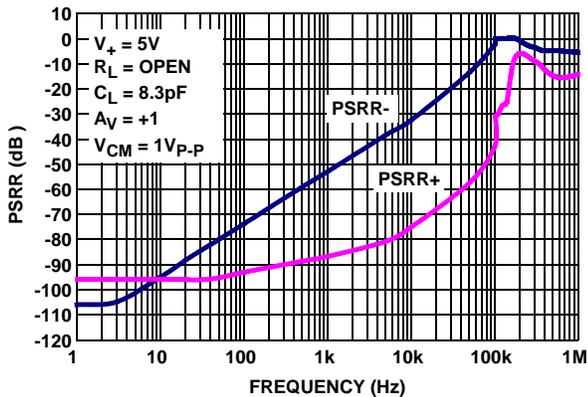


FIGURE 13. PSRR vs FREQUENCY, V_+ , $V_- = \pm 2.5V$

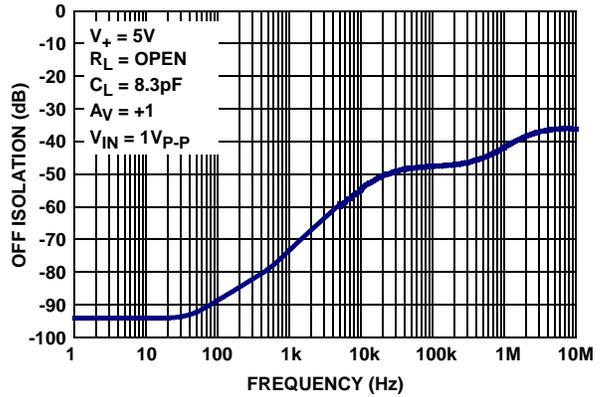


FIGURE 14. OFF ISOLATION vs FREQUENCY; V_+ , $V_- = \pm 2.5V$

Typical Performance Curves (Continued)

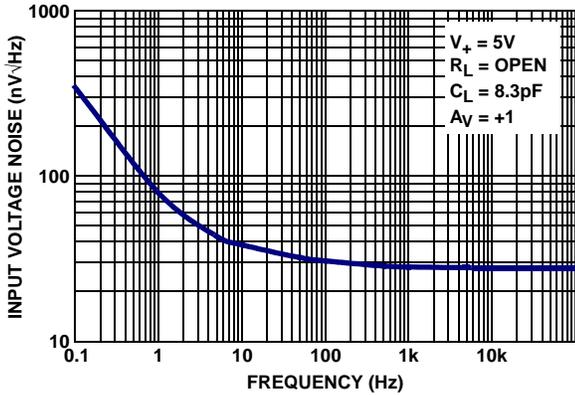


FIGURE 15. INPUT VOLTAGE NOISE DENSITY vs FREQUENCY

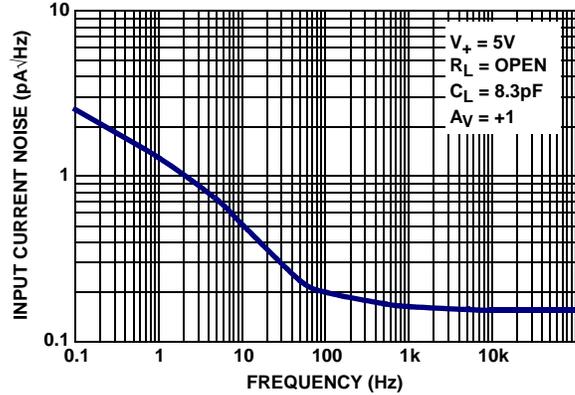


FIGURE 16. INPUT CURRENT NOISE DENSITY vs FREQUENCY

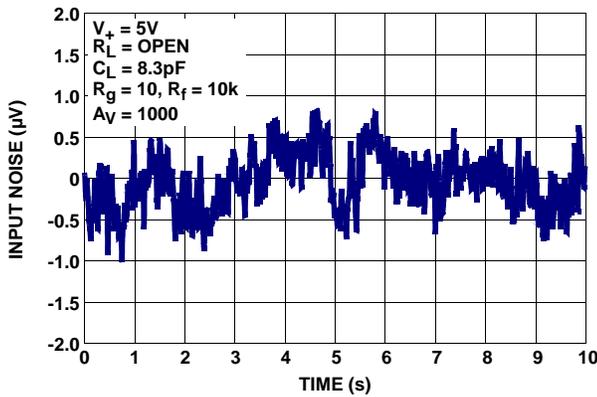


FIGURE 17. INPUT VOLTAGE NOISE 0.1Hz TO 10Hz

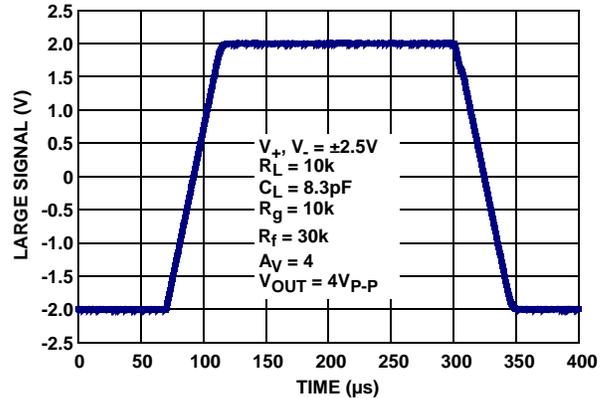


FIGURE 18. LARGE SIGNAL STEP RESPONSE

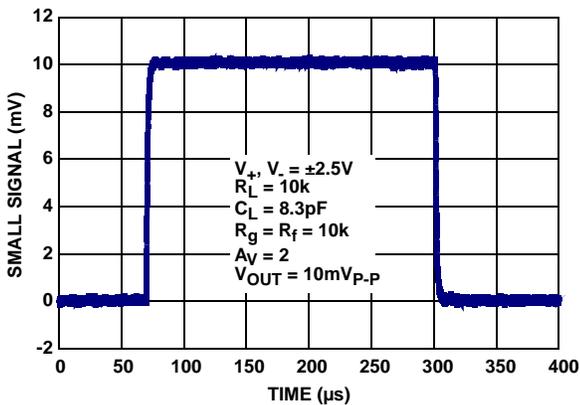


FIGURE 19. SMALL SIGNAL STEP RESPONSE

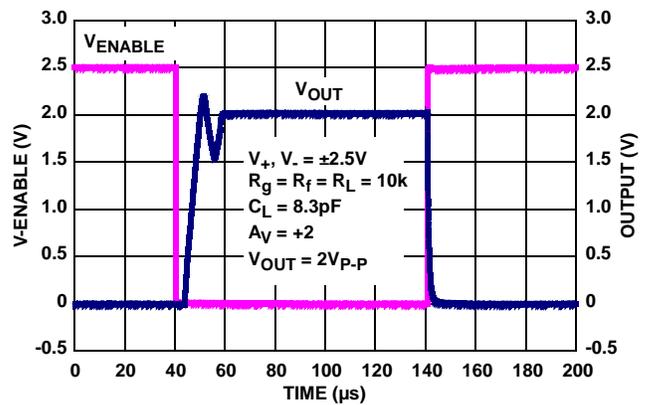


FIGURE 20. ENABLE TO OUTPUT RESPONSE

Typical Performance Curves (Continued)

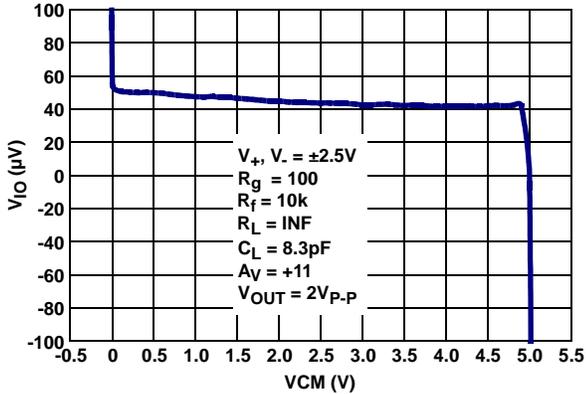


FIGURE 21. INPUT OFFSET VOLTAGE vs COMMON-MODE INPUT VOLTAGE

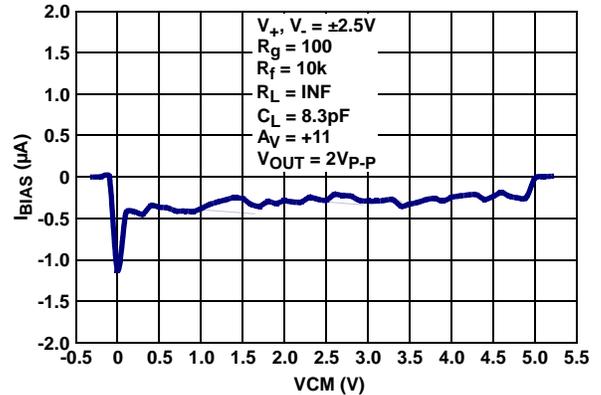


FIGURE 22. INPUT OFFSET CURRENT vs COMMON-MODE INPUT VOLTAGE

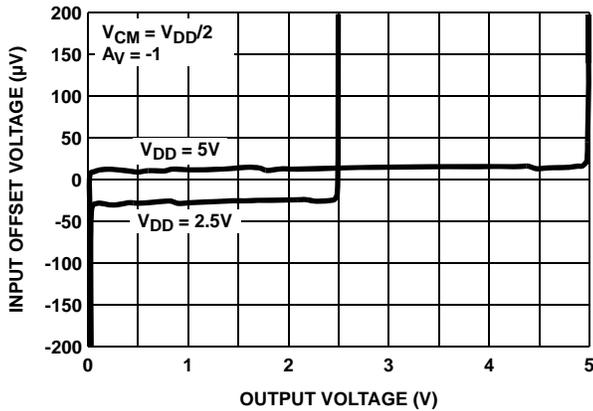


FIGURE 23. INPUT OFFSET VOLTAGE vs OUTPUT VOLTAGE

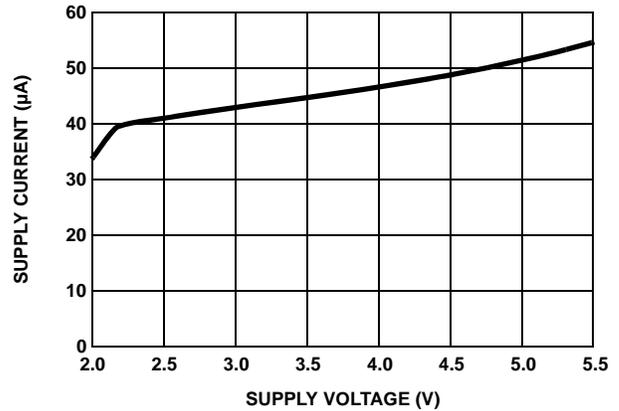


FIGURE 24. SUPPLY CURRENT vs SUPPLY VOLTAGE

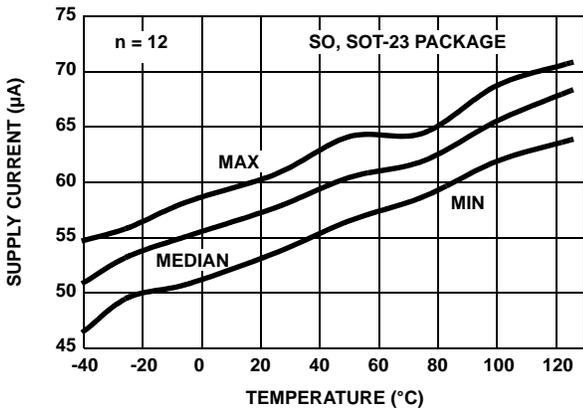


FIGURE 25. SUPPLY CURRENT vs TEMPERATURE
VS = ±2.5V ENABLED. RL = INF

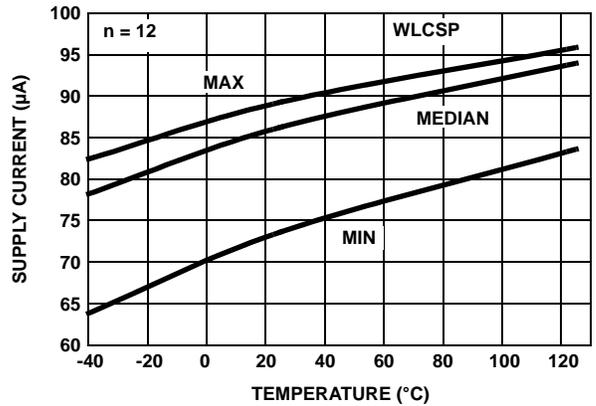


FIGURE 26. SUPPLY CURRENT vs TEMPERATURE
VS = ±2.5V ENABLED. RL = INF

Typical Performance Curves (Continued)

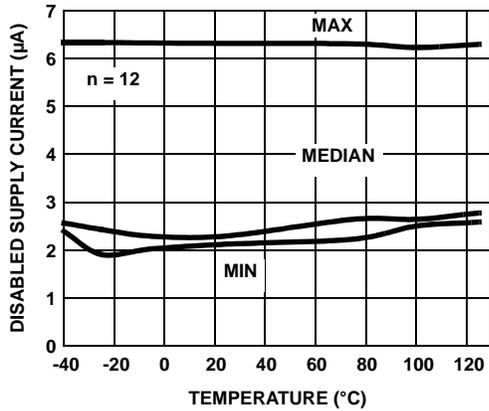


FIGURE 27. DISABLED SUPPLY CURRENT vs TEMPERATURE $V_S = \pm 2.5V$ $R_L = INF$

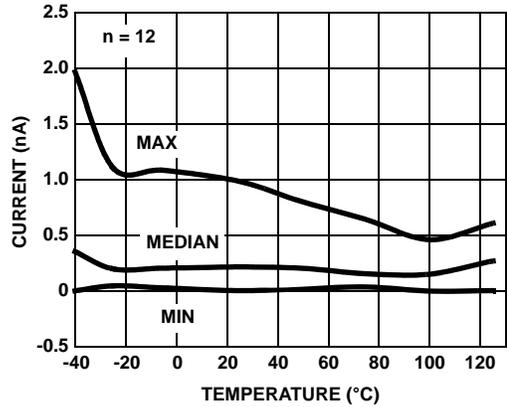


FIGURE 28. $I_{BIAS (+)}$ vs TEMPERATURE $V_S = \pm 2.5V$

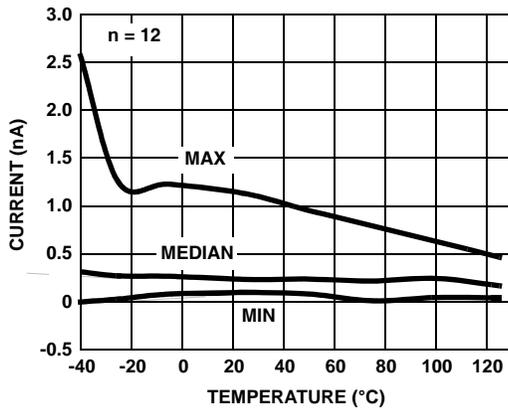


FIGURE 29. $I_{BIAS (+)}$ vs TEMPERATURE $V_S = \pm 1.2V$

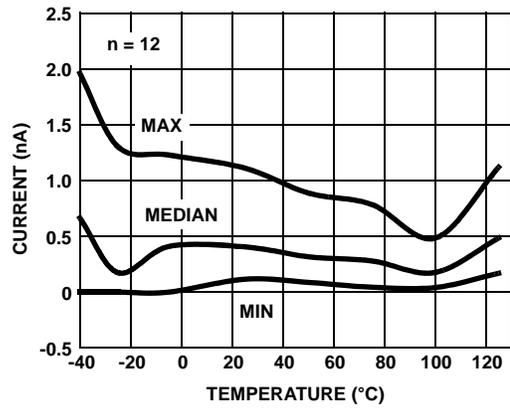


FIGURE 30. $I_{BIAS (-)}$ vs TEMPERATURE $V_S = \pm 2.5V$

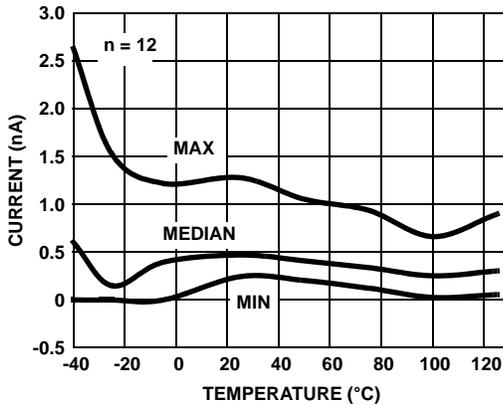


FIGURE 31. $I_{BIAS (-)}$ vs TEMPERATURE $V_S = \pm 1.2V$

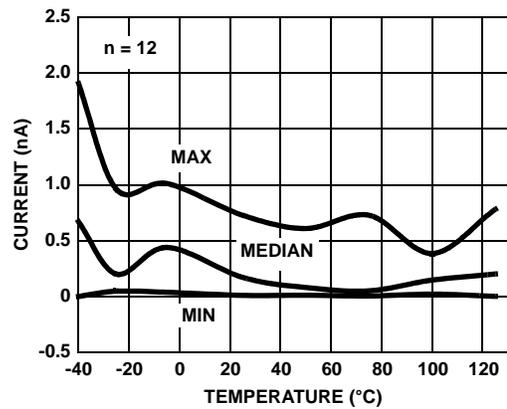


FIGURE 32. INPUT OFFSET CURRENT vs TEMPERATURE $V_S = \pm 2.5V$

Typical Performance Curves (Continued)

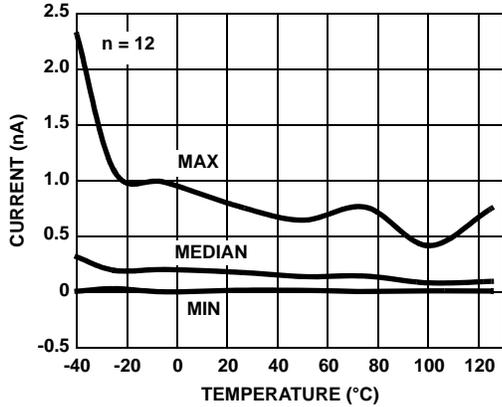


FIGURE 33. INPUT OFFSET CURRENT vs TEMPERATURE
 $V_S = \pm 1.2V$

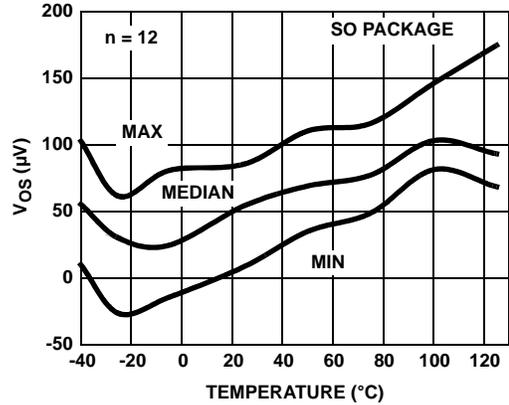


FIGURE 34. INPUT OFFSET VOLTAGE vs TEMPERATURE
 $V_S = \pm 2.5V$

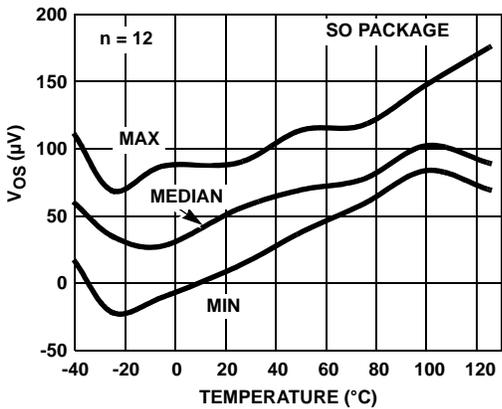


FIGURE 35. INPUT OFFSET VOLTAGE vs TEMPERATURE
 $V_S = \pm 1.2V$

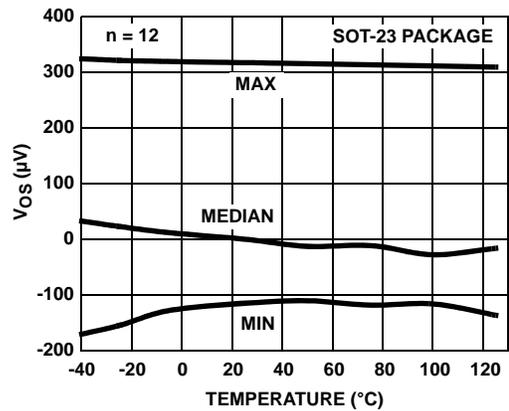


FIGURE 36. INPUT OFFSET VOLTAGE vs TEMPERATURE
 $V_S = \pm 2.5V$

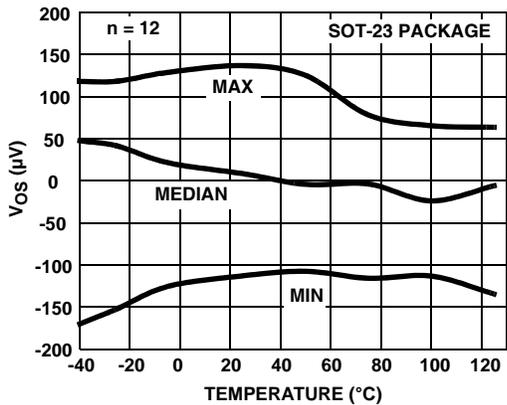


FIGURE 37. INPUT OFFSET VOLTAGE vs TEMPERATURE
 $V_S = \pm 1.2V$

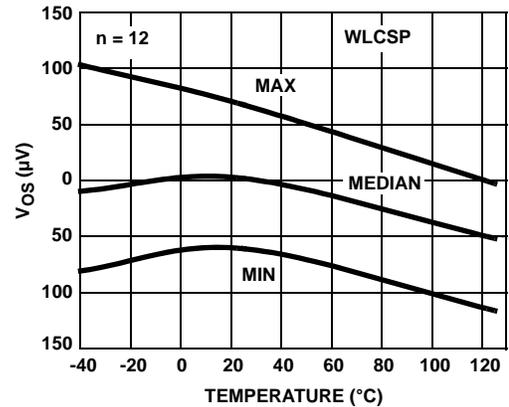


FIGURE 38. INPUT OFFSET VOLTAGE vs TEMPERATURE
 $V_S = \pm 2.5V$

Typical Performance Curves (Continued)

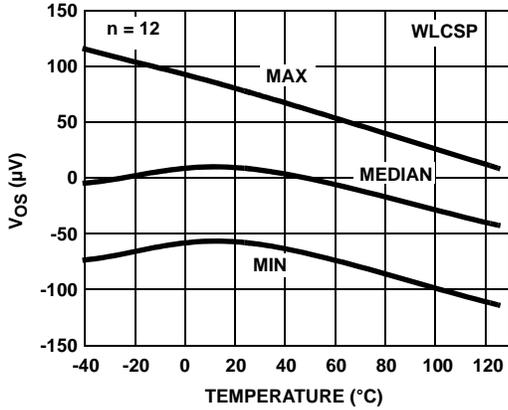


FIGURE 39. INPUT OFFSET VOLTAGE vs TEMPERATURE $V_S = \pm 1.2V$

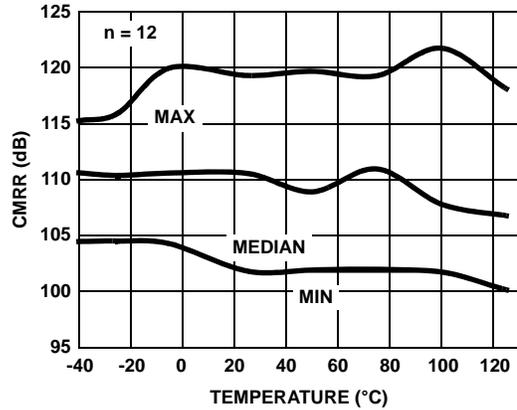


FIGURE 40. CMRR vs TEMPERATURE $V_{CM} = +2.5V$ TO $-2.5V$

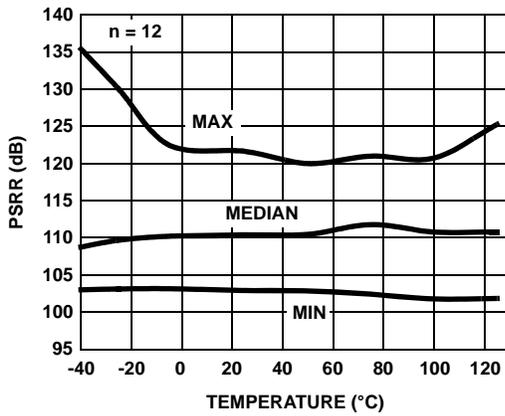


FIGURE 41. PSRR vs TEMPERATURE $V_S = \pm 1.2V$ TO $\pm 2.5V$

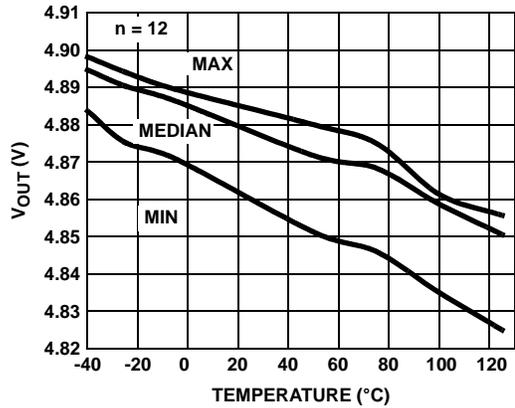


FIGURE 42. POSITIVE V_{OUT} vs TEMPERATURE $R_L = 1k$ $V_S = \pm 2.5V$

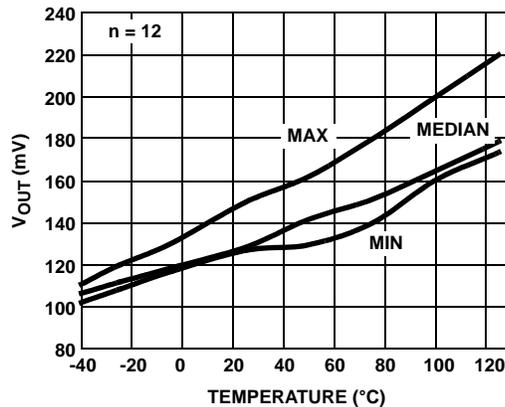


FIGURE 43. NEGATIVE V_{OUT} vs TEMPERATURE $R_L = 1k$ $V_S = \pm 2.5V$

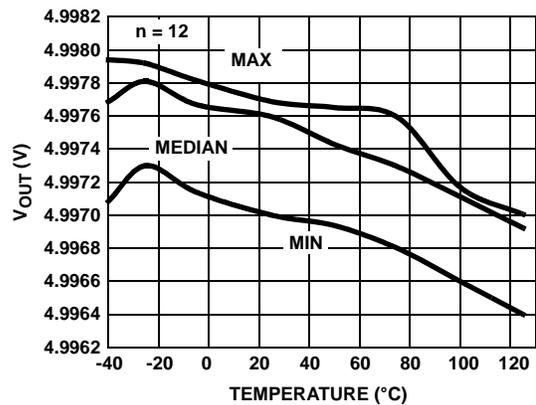


FIGURE 44. POSITIVE V_{OUT} vs TEMPERATURE $R_L = 100k$ $V_S = \pm 2.5V$

Typical Performance Curves (Continued)

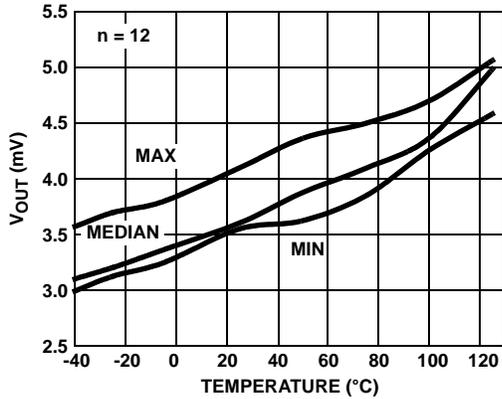


FIGURE 45. NEGATIVE V_{OUT} vs TEMPERATURE $R_L = 100k$
 $V_S = \pm 2.5V$

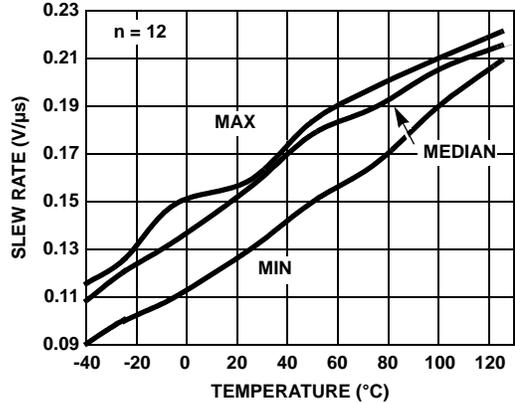


FIGURE 46. +SLEW RATE vs TEMPERATURE $V_S = \pm 2.5V$
INPUT = $\pm 0.75V$, $A_V = 2$

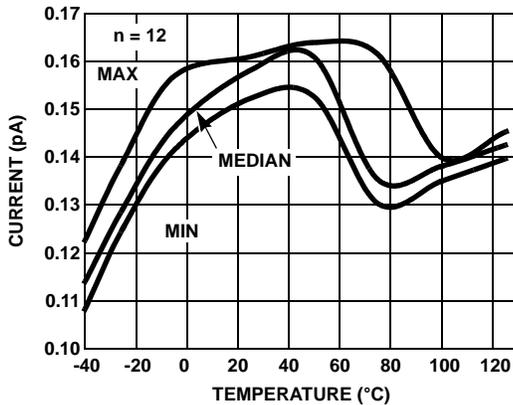


FIGURE 47. -SLEW RATE vs TEMPERATURE $V_S = \pm 2.5V$
INPUT = $\pm 0.75V$, $A_V = 2$





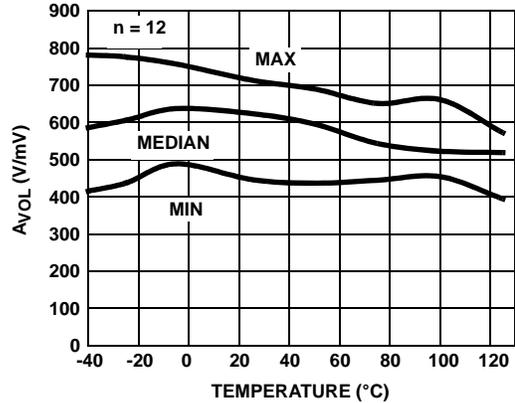


FIGURE 48. A_{VOL} , $R_L = 100k$, $V_S = \pm 2.5V$, $V_O = \pm 2V$

Pin Descriptions

| SO PIN NUMBER | SOT-23 PIN NUMBER | 6 Ld WLCSP PIN NUMBER | PIN NAME | EQUIVALENT CIRCUIT | DESCRIPTION |
|---------------|-------------------|-----------------------|-----------------|--------------------|--|
| 1, 5 | | | NC | | No internal connection |
| 2 | 4 | C1 | IN- | Circuit 1 | Amplifier's inverting input |
| 3 | 3 | C2 | IN+ | Circuit 1 | Amplifier's non-inverting input |
| 4 | 2 | B2 | V- | Circuit 4 | Negative power supply |
| | | A1 | DNC | | Do not connect. Pin must be left floating. |
| 6 | 1 | A2 | OUT | Circuit 3 | Amplifier's output |
| 7 | 6 | B1 | V+ | Circuit 4 | Positive power supply |
| 8 | 5 | | \overline{EN} | Circuit 2 | Amplifier's enable pin with internal pull-down; Logic "1" selects the disabled state; Logic "0" selects the enabled state. |

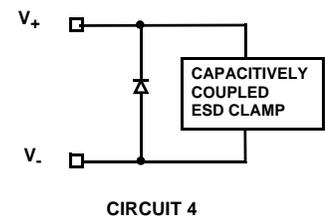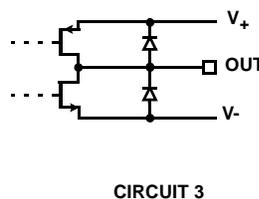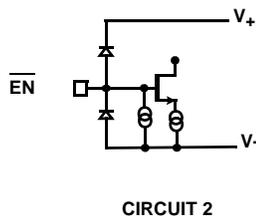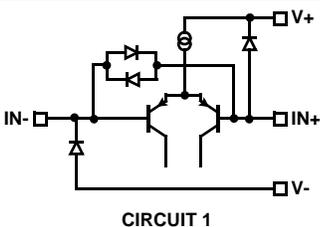

Applications Information

Introduction

The EL8176 is a rail-to-rail input and output micro-power precision single supply operational amplifier with an enable feature. The device achieves rail-to-rail input and output operation and eliminates the concerns introduced by a conventional rail-to-rail I/O operational amplifier as discussed below.

Rail-to-Rail Input

The input common-mode voltage range of the EL8176 goes from negative supply to positive supply without introducing offset errors or degrading performance associated with a conventional rail-to-rail input operational amplifier. Many rail-to-rail input stages use two differential input pairs, a long-tail PNP (or PFET) and an NPN (or NFET). Severe penalties have to be paid for this circuit topology. As the input signal moves from one supply rail to another, the operational amplifier switches from one input pair to the other causing drastic changes in input offset voltage and an undesired change in magnitude and polarity of input offset current.

The EL8176 achieves input rail-to-rail without sacrificing important precision specifications and without degrading distortion performance. The EL8176's input offset voltage exhibits a smooth behavior throughout the entire common-mode input range. The input bias current versus the common-mode voltage range for the EL8176 gives us an undistorted behavior from typically 10mV above the negative rail all the way up to the positive rail.

Input Bias Current Compensation

The input bias currents as low as 500pA are achieved while maintaining an excellent bandwidth for a micro-power operational amplifier. Inside the EL8176 is an input bias canceling circuit. The input stage transistors are still biased with an adequate current for speed but the canceling circuit sinks most of the base current, leaving a small fraction as input bias current. The input bias current compensation/cancellation is stable from -40°C to +125°C and operates from typically 10mV to the positive supply rail.

Rail-to-Rail Output

A pair of complementary MOSFET devices achieves rail-to-rail output swing. The NMOS sinks current to swing the output in the negative direction. The PMOS sources current to swing the output in the positive direction. The EL8176 with a 100kΩ load will swing to within 3mV of the supply rails.

Enable/Disable Feature

The EL8176, in the SOT-23 and SO packages, offers an $\overline{\text{EN}}$ pin. The active low $\overline{\text{EN}}$ pin disables the device when pulled up to at least 2.0V. When disabled, the output is in a high impedance state and the part consumes typically 3μA. When disabled, the high impedance output allows multiple parts to be MUXed together. When configured as a MUX, the outputs

are tied together in parallel and a channel can be selected by pulling the $\overline{\text{EN}}$ pin to 0.8V or lower. The $\overline{\text{EN}}$ pin has an internal pull-down. If left open or floating, the $\overline{\text{EN}}$ pin will internally be pulled low, enabling the part by default.

Proper Layout Maximizes Performance

To achieve the maximum performance of the high input impedance and low offset voltage of the EL8176, care should be taken in the circuit board layout. The PC board surface must remain clean and free of moisture to avoid leakage currents between adjacent traces. Surface coating of the circuit board will reduce surface moisture and provide a humidity barrier, reducing parasitic resistance on the board. The use of guard rings around the amplifier inputs will further reduce leakage currents. Figure 49 shows how the guard ring should be configured and Figure 50 shows the top view of how a surface mount layout can be arranged. The guard ring does not need to be a specific width, but it should form a continuous loop around both inputs. By setting the guard ring voltage equal to the voltage at the non-inverting input, parasitic capacitance is minimized as well. For further reduction of leakage currents, components can be mounted to the PC board using Teflon standoff insulators.

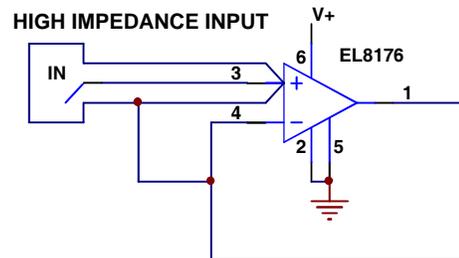


FIGURE 49.

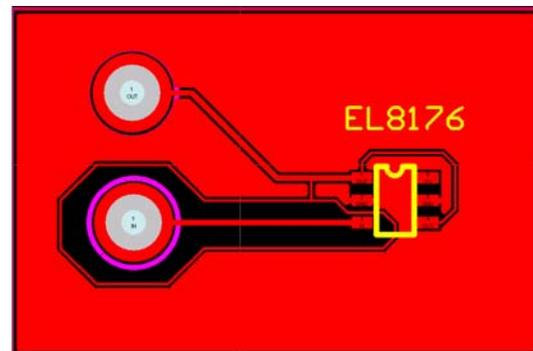


FIGURE 50.

Typical Applications


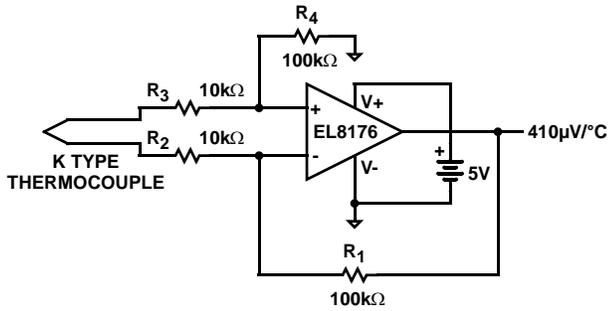


FIGURE 51. THERMOCOUPLE AMPLIFIER

Thermocouples are the most popular temperature-sensing device because of their low cost, interchangeability, and ability to measure a wide range of temperatures. The EL8176 is used to convert the differential thermocouple voltage into single-ended signal with 10X gain. The EL8176's rail-to-rail input characteristic allows the thermocouple to be biased at ground and the converter to run from a single 5V supply.

Small Outline Package Family (SO)

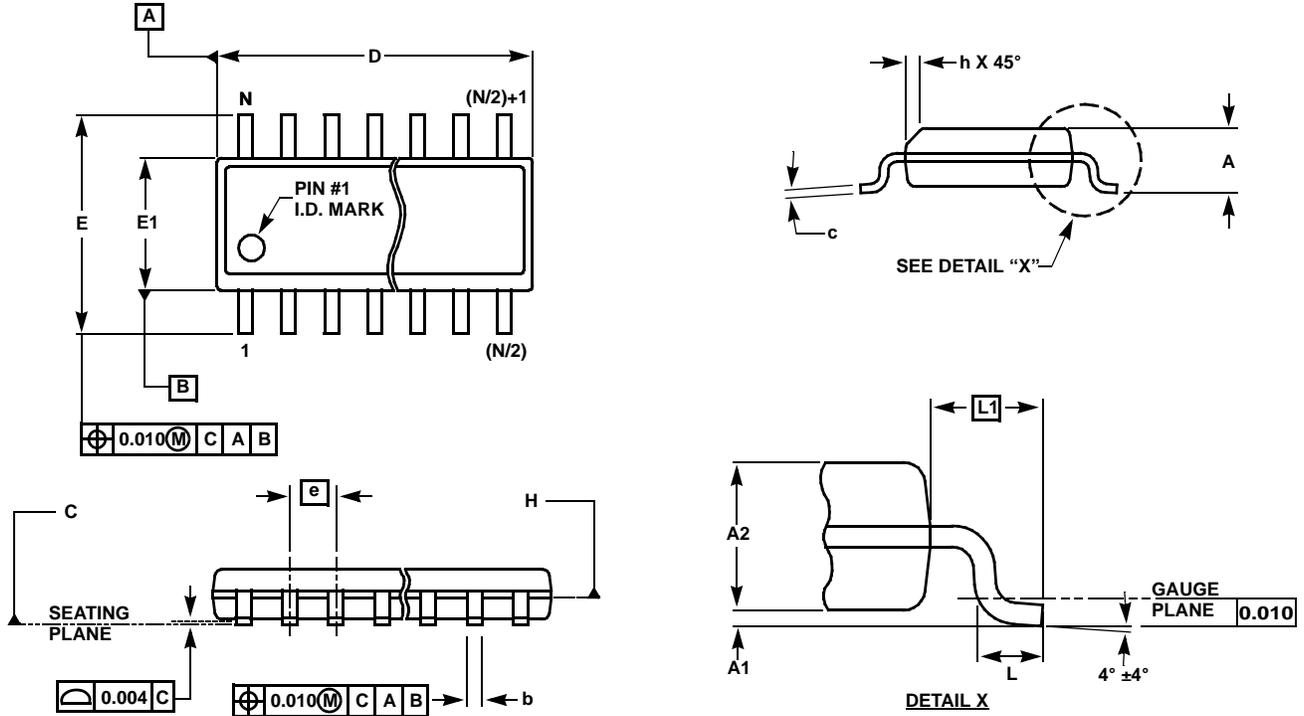

MDP0027

SMALL OUTLINE PACKAGE FAMILY (SO)




| SYMBOL | INCHES | | | | | | | TOLERANCE | NOTES |
|--------|--------|-------|---------------|------------------------|---------------|---------------|---------------|-----------|-------|
| | SO-8 | SO-14 | SO16 (0.150") | SO16 (0.300") (SOL-16) | SO20 (SOL-20) | SO24 (SOL-24) | SO28 (SOL-28) | | |
| A | 0.068 | 0.068 | 0.068 | 0.104 | 0.104 | 0.104 | 0.104 | MAX | - |
| A1 | 0.006 | 0.006 | 0.006 | 0.007 | 0.007 | 0.007 | 0.007 | ±0.003 | - |
| A2 | 0.057 | 0.057 | 0.057 | 0.092 | 0.092 | 0.092 | 0.092 | ±0.002 | - |
| b | 0.017 | 0.017 | 0.017 | 0.017 | 0.017 | 0.017 | 0.017 | ±0.003 | - |
| c | 0.009 | 0.009 | 0.009 | 0.011 | 0.011 | 0.011 | 0.011 | ±0.001 | - |
| D | 0.193 | 0.341 | 0.390 | 0.406 | 0.504 | 0.606 | 0.704 | ±0.004 | 1, 3 |
| E | 0.236 | 0.236 | 0.236 | 0.406 | 0.406 | 0.406 | 0.406 | ±0.008 | - |
| E1 | 0.154 | 0.154 | 0.154 | 0.295 | 0.295 | 0.295 | 0.295 | ±0.004 | 2, 3 |
| e | 0.050 | 0.050 | 0.050 | 0.050 | 0.050 | 0.050 | 0.050 | Basic | - |
| L | 0.025 | 0.025 | 0.025 | 0.030 | 0.030 | 0.030 | 0.030 | ±0.009 | - |
| L1 | 0.041 | 0.041 | 0.041 | 0.056 | 0.056 | 0.056 | 0.056 | Basic | - |
| h | 0.013 | 0.013 | 0.013 | 0.020 | 0.020 | 0.020 | 0.020 | Reference | - |
| N | 8 | 14 | 16 | 16 | 20 | 24 | 28 | Reference | - |

Rev. M 2/07

NOTES:

1. Plastic or metal protrusions of 0.006" maximum per side are not included.
2. Plastic interlead protrusions of 0.010" maximum per side are not included.
3. Dimensions "D" and "E1" are measured at Datum Plane "H".
4. Dimensioning and tolerancing per ASME Y14.5M-1994

SOT-23 Package Family

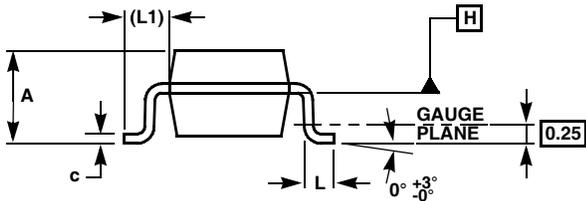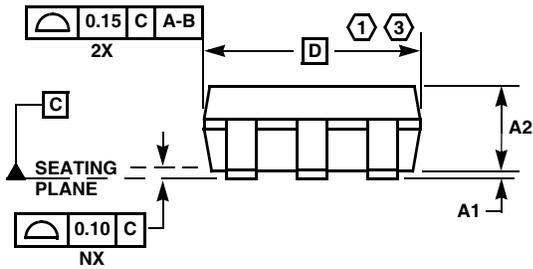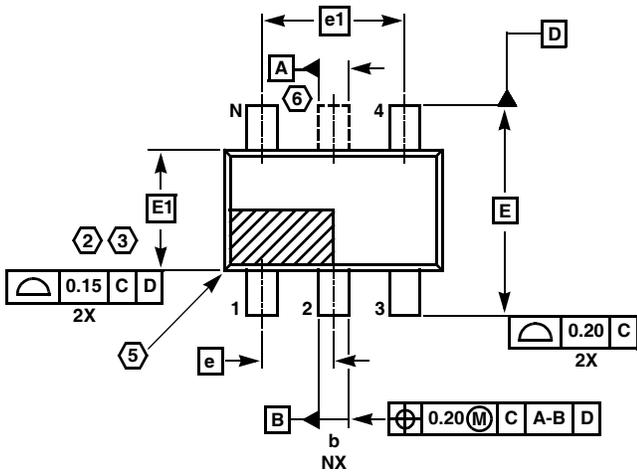

MDP0038

SOT-23 PACKAGE FAMILY




| SYMBOL | MILLIMETERS | | TOLERANCE |
|--------|-------------|---------|-----------|
| | SOT23-5 | SOT23-6 | |
| A | 1.45 | 1.45 | MAX |
| A1 | 0.10 | 0.10 | ±0.05 |
| A2 | 1.14 | 1.14 | ±0.15 |
| b | 0.40 | 0.40 | ±0.05 |
| c | 0.14 | 0.14 | ±0.06 |
| D | 2.90 | 2.90 | Basic |
| E | 2.80 | 2.80 | Basic |
| E1 | 1.60 | 1.60 | Basic |
| e | 0.95 | 0.95 | Basic |
| e1 | 1.90 | 1.90 | Basic |
| L | 0.45 | 0.45 | ±0.10 |
| L1 | 0.60 | 0.60 | Reference |
| N | 5 | 6 | Reference |

Rev. F 2/07

NOTES:

1. Plastic or metal protrusions of 0.25mm maximum per side are not included.
2. Plastic interlead protrusions of 0.25mm maximum per side are not included.
3. This dimension is measured at Datum Plane "H".
4. Dimensioning and tolerancing per ASME Y14.5M-1994.
5. Index area - Pin #1 I.D. will be located within the indicated zone (SOT23-6 only).
6. SOT23-5 version has no center lead (shown as a dashed line).

Wafer Level Chip Scale Package (WLCSP)

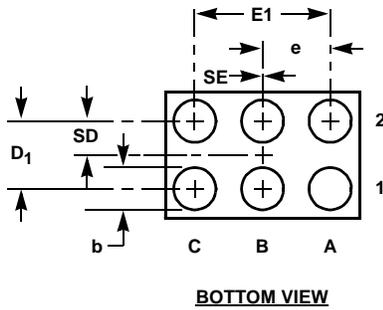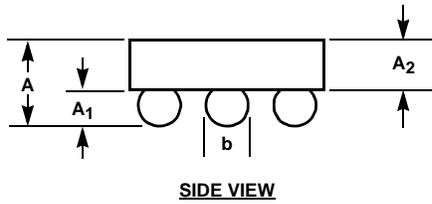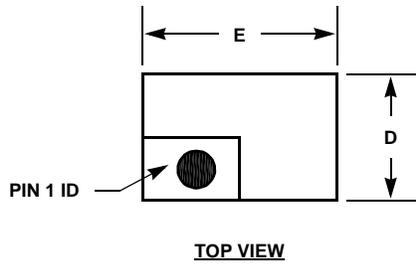

W3x2.6C

3x2 ARRAY 6 BALL WAFER LEVEL CHIP SCALE PACKAGE

| SYMBOL | MILLIMETERS |
|----------------|--------------------|
| A | 0.51 Min, 0.55 Max |
| A ₁ | 0.225 ±0.015 |
| A ₂ | 0.305 ±0.013 |
| b | Φ0.323 ±0.025 |
| D | 0.955 ±0.020 |
| D ₁ | 0.50 BASIC |
| E | 1.455 ±0.020 |
| E ₁ | 1.00 BASIC |
| e | 0.50 BASIC |
| SD | 0.25 BASIC |
| SE | 0.00 BASIC |

Rev. 3 03/08

NOTES:

1. All dimensions are in millimeters.

All Intersil U.S. products are manufactured, assembled and tested utilizing ISO9000 quality systems.

Intersil Corporation's quality certifications can be viewed at www.intersil.com/design/quality

Intersil products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design, software and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.

For information regarding Intersil Corporation and its products, see www.intersil.com