

SERIES: EMSA 18W | **DESCRIPTION:** AC-DC POWER SUPPLY


FEATURES

- up to 18 W power
- interchangeable AC blades
- universal input (90~264 Vac)
- single regulated output from 5~24 V
- over voltage and short circuit protections
- UL/cUL, GS, RCM, CCC, PSE safety approvals
- level V efficiency
- custom designs available



MODEL	output voltage	output current max	output power max	ripple and noise ¹ max	efficiency level
	(Vdc)	(A)	(W)	(mVp-p)	
EMSA050300	5	3.0	15	150	V
EMSA060300	6	3.0	18	150	V
EMSA090200	9	2.0	18	150	V
EMSA120150	12	1.5	18	150	V
EMSA150120	15	1.2	18	150	V
EMSA180100	18	1.0	18	180	V
EMSA200090	20	0.9	18	200	V
EMSA240075	24	0.75	18	240	V

Notes: 1. At full load, 100 ~ 240 Vac input, 20 MHz bandwidth oscilloscope, each output terminated with 10 μ F aluminum electrolytic and 0.1 μ F ceramic capacitors.

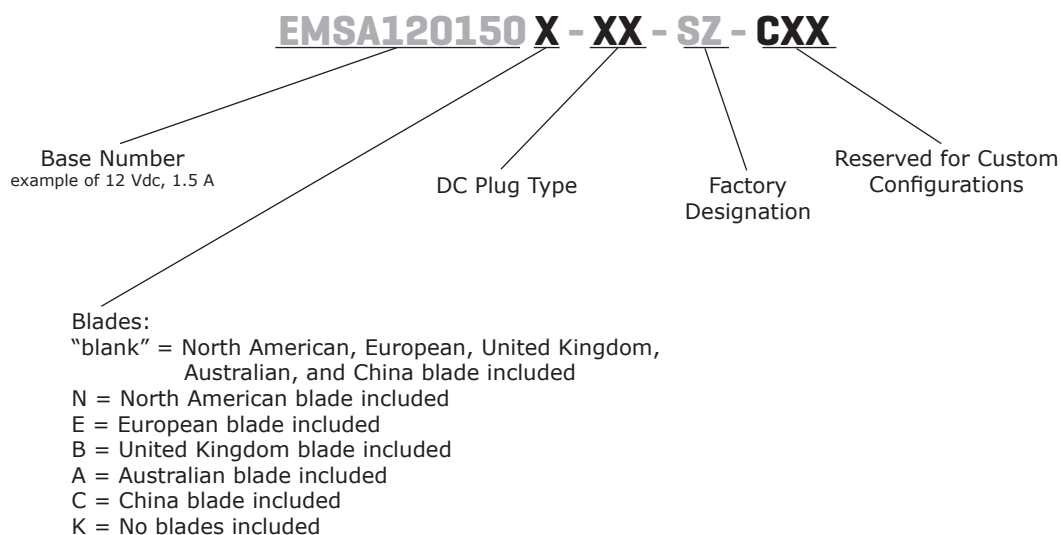PART NUMBER KEY


INPUT

parameter	conditions/description	min	nom	max	units
voltage		90		264	Vac
frequency		47		63	Hz
current				0.6	A RMS
inrush current	5, 6 V output at 115 V ac, cold start			30	A
	5, 6 V output at 230 V ac, cold start			60	A
	all other outputs: 115 V ac, cold start			40	A
	all other outputs: 230 V ac, cold start			80	A
no load power consumption				0.3	W

OUTPUT

parameter	conditions/description	min	nom	max	units
line regulation			±1		%
load regulation			±5		%

PROTECTIONS

parameter	conditions/description	min	nom	max	units
over voltage protection	output voltage clamped by internal protection zener ¹				
short circuit protection	Output shut down and auto restart				

Notes: 1. 5V and 6V models only

SAFETY & COMPLIANCE

parameter	conditions/description	min	nom	max	units
isolation voltage	input to output at 10 mA for 1 minute			3,000	Vac
				4,242	Vdc
isolation resistance	input to output at 500 V dc	100			MΩ
safety approvals	UL 60950-1, IEC 60950-1, EN 60950-1, RCM, CCC, PSE				
EMI/EMC	FCC Class B, VCCI Class II				
leakage current				0.25	mA
RoHS compliant	yes				


ENVIRONMENTAL

parameter	conditions/description	min	nom	max	units
operating temperature		0		40	°C
storage temperature		-10		75	°C
operating humidity		20		80	%
storage humidity		10		90	%


parameter	conditions/description	min	typ	max	units
dimensions	74 x 43.5 x 35.3 (2.913 x 1.713 x 1.390 inch)				mm
input plug	multi-blade (US, UK, Europe, Australia, China)				

OUTPUT PLUG OPTIONS

3.5 mm Phono Plug




P1




P1R

*Tip positive

Standard DC Plug




Standard PX



Right Angle PXR


	A	B	C	Unit
P5/P5R	5.5	2.1	9.5	mm
P6/P6R	5.5	2.5	9.5	mm
P7/P7R	3.5	1.35	9.5	mm
P8/P8R	3.8	1.35	9.5	mm
P9/P9R	3.8	1.05	9.5	mm

Locking DC Plug

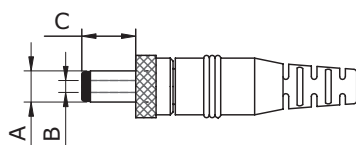


	A	B	C	Unit
P10	5.5	2.1	9.5	mm
P11	5.5	2.5	9.5	mm

EIAJ Plugs




Standard PXX




Right Angle PXXR

	EIAJ	A	B	C	D	Unit
P12/P12R	EIAJ-1	2.35	0.7	9.5	NA	mm
P13/P13R	EIAJ-2	4.0	1.7	9.5	5.0	mm
P14/P14R	EIAJ-3	4.75	1.7	9.5	5.0	mm



Stripped and Tinned



DC PLUG TYPE


ST

Stripped and Tinned

PXXXX

Plug Type

 Plug Angle:
 "Blank" = Standard
 R = Right Angle

 Plug Polarity:
 "Blank" = N/A
 P = Center Positive
 N = Center Negative


*Contact CUI for additional output plug options.

REVISION HISTORY

rev.	description	date
1.0	initial release	07/28/2010
1.01	PSE safety approval added	02/08/2011
1.02	new template applied	09/07/2011
1.03	updated P7/P7R B dimension	03/23/2012
1.04	V-Infinity branding removed, safety and EMI/EMC data updated	08/21/2012
1.05	corrected DC cord lengths	12/19/2012
1.06	updated rev table	01/11/2013
1.07	updated safety approval section	04/10/2013

The revision history provided is for informational purposes only and is believed to be accurate.



Headquarters
20050 SW 112th Ave.
Tualatin, OR 97062
800.275.4899

Fax 503.612.2383
cui.com
techsupport@cui.com

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

CUI offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

CUI Inc.:

[EMSA090200-P5P-SZ](#) [EMSA120150-P5P-SZ](#) [EMSA050300-P5P-SZ](#) [EMSA180100-P5RP-SZ](#) [EMSA240075-P5P-SZ](#) [EMSA120150-P6P-SZ](#) [EMSA240075-P6RP-SZ](#) [EMSA050300-P6RP-SZ](#) [EMSA150120-P5RP-SZ](#) [EMSA120150-P5RP-SZ](#) [EMSA090200-P5RP-SZ](#) [EMSA180100-P6RP-SZ](#) [EMSA200090-P5RP](#) [EMSA060300-P5P-SZ](#) [EMSA060300-P6P-SZ](#) [EMSA090200-P6RP-SZ](#) [EMSA150120K-P5P-SZ](#) [EMSA090200-P6P-SZ](#) [EMSA060300-P6RP-SZ](#) [EMSA050300-P5RP-SZ](#) [EMSA120150K-P5P-SZ](#) [EMSA200090-P6P](#) [EMSA240075K-P5P-SZ](#) [EMSA090200K-P5P-SZ](#) [EMSA150120-P5P-SZ](#) [EMSA240075-P5RP-SZ](#) [EMSA180100-P6P-SZ](#) [EMSA200090K-P5P](#) [EMSA120150-P6RP-SZ](#) [EMSA050300K-P5P-SZ](#) [EMSA060300K-P5P-SZ](#) [EMSA150120-P6RP-SZ](#) [EMSA240075-P6P-SZ](#) [EMSA200090-P6RP](#) [EMSA200090-P5P](#) [EMSA180100-P5P-SZ](#) [EMSA050300-P6P-SZ](#) [EMSA060300-P5RP-SZ](#) [EMSA150120-P6P-SZ](#) [EMSA180100K-P5P-SZ](#)