


Alchip™-MVY Series

- Endurance : 1,000 to 5,000 hours at 105°C
- Low impedance
- For digital equipment, especially DC-DC converters
- Solvent resistant type except 80 & 100V_{dc} (see PRECAUTIONS AND GUIDELINES)
- Vibration resistant structure
- RoHS Compliant
- AEC-Q200 compliant : Please contact Chemi-Con for more details, test data, information.




SPECIFICATIONS

Items	Characteristics										
Category	-55 to +105°C (6.3 to 63V _{dc}) -40 to +105°C (80 & 100V _{dc})										
Temperature Range											
Rated Voltage Range	6.3 to 100V _{dc}										
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)										
Leakage Current	I=0.01CV or 3μA, whichever is greater. Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes)										
Dissipation Factor (tan δ)	Rated voltage (V _{dc})		6.3V	10V	16V	25V	35V	50V	63V	80V	100V
	D55 to F80	0.24	0.20	0.16	0.14	0.12	0.12	—	—	—	—
	HA0 & JA0	0.28	0.24	0.20	0.16	0.14	0.12	—	—	—	—
Low Temperature Characteristics (Max. Impedance Ratio)	tan δ (Max.)		0.26	0.22	0.18	0.16	0.14	0.12	0.14	0.10	0.10
	KE0 to MN0										
Endurance	Rated voltage (V _{dc})		6.3V	10V	16V	25V	35V	50V	63V	80V	100V
	Z(-40°C)/Z(+20°C)		3	2	2	2	2	2	—	—	—
	KE0 to MN0		10	8	6	4	3	3	3	3	3
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for specified time at 105°C.										
	Time	D55 to F80 : 1,000 hours HA0 & JA0 : 2,000 hours KE0 to MN0 : 5,000 hours									
	Rated voltage	6.3V _{dc} (D55 to JA0) 6.3 to 100V _{dc}									
Shelf Life	Capacitance change	≤ ±30% of the initial value ≤ ±20% of the initial value									
	D.F. (tan δ)	≤300% of the initial specified value ≤200% of the initial specified value									
	Leakage current	≤The initial specified value ≤The initial specified value									




DIMENSIONS [mm]

- Terminal Code : A
- Size code : D55 to MN0

- Terminal Code : G (Vibration resistant structure)
- Size code : HA0 to MN0




Note : L±0.5 for HA0 to MN0



▨ : Dummy terminals

Size code	D	L	A	B	C	W	P
D55	4	5.2	4.3	4.3	5.1	0.5 to 0.8	1.0
E55	5	5.2	5.3	5.3	5.9	0.5 to 0.8	1.4
F55	6.3	5.2	6.6	6.6	7.2	0.5 to 0.8	1.9
F61	6.3	5.8	6.6	6.6	7.2	0.5 to 0.8	1.9
F80	6.3	7.7	6.6	6.6	7.2	0.5 to 0.8	1.9
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5
KE0	12.5	13.5	13.0	13.0	13.7	1.0 to 1.3	4.2
KG5	12.5	16.0	13.0	13.0	13.7	1.0 to 1.3	4.2
LH0	16	16.5	17.0	17.0	18.0	1.0 to 1.3	6.5
LN0	16	21.5	17.0	17.0	18.0	1.0 to 1.3	6.5
MH0	18	16.5	19.0	19.0	20.0	1.0 to 1.3	6.5
MN0	18	21.5	19.0	19.0	20.0	1.0 to 1.3	6.5

PART NUMBERING SYSTEM

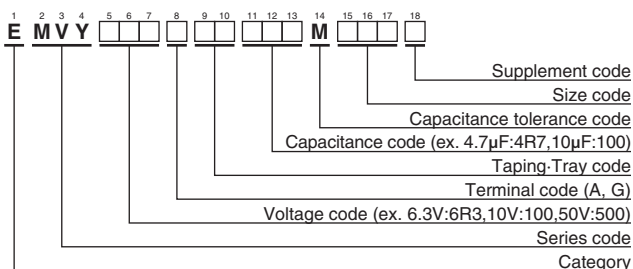


Please refer to "Product code guide (surface mount type)"

MARKING

D55 to JA0
EX) 6.3V100μF

KE0 to MN0
EX) 16V1,000μF



◆STANDARD RATINGS

□ is not solvent resistant (80/100V_{dc}).

WV (V _{dc})	Cap (μF)	Size code	Impedance (Ω max./20°C, 100kHz)	Rated ripple current (mA rms/105°C, 100kHz)	Part No.	WV (V _{dc})	Cap (μF)	Size code	Impedance (Ω max./20°C, 100kHz)	Rated ripple current (mA rms/105°C, 100kHz)	Part No.
6.3	22	D55	3.0	60	EMVY6R3ADA220MD55G	25	330	HA0	0.30	450	EMVY250□DA331MHA0G
	33	E55	1.8	95	EMVY6R3ADA330ME55G		470	JA0	0.15	670	EMVY250□DA471MJA0G
	47	E55	1.8	95	EMVY6R3ADA470ME55G		1,000	LH0	0.054	1,260	EMVY250□DA102MLH0S
	100	F55	1.0	140	EMVY6R3ADA101MF55G		1,000	MH0	0.054	1,350	EMVY250□DA102MMH0S
	220	F55	1.0	140	EMVY6R3ADA221MF55G		2,200	LN0	0.038	1,630	EMVY250□DA222MLN0S
	330	F80	0.34	280	EMVY6R3ADA331MF80G		2,200	MN0	0.038	1,750	EMVY250□DA222MMN0S
	470	HA0	0.30	450	EMVY6R3□DA471MHA0G		3,300	MN0	0.038	1,750	EMVY250□DA332MMN0S
	680	HA0	0.30	450	EMVY6R3□DA681MHA0G	35	4.7	D55	3.0	60	EMVY350ADA4R7MD55G
	1,000	HA0	0.30	450	EMVY6R3□DA102MHA0G		10	E55	1.8	95	EMVY350ADA100ME55G
	1,500	JA0	0.15	670	EMVY6R3□DA152MJA0G		22	F55	1.0	140	EMVY350ADA220MF55G
	2,200	KE0	0.070	820	EMVY6R3□RA222MKE0S		33	F55	1.0	140	EMVY350ADA330MF55G
	2,200	LH0	0.054	1,260	EMVY6R3□DA222MLH0S		47	F55	1.0	140	EMVY350ADA470MF55G
	3,300	KG5	0.060	950	EMVY6R3□RA332MKG5S		47	F61	1.0	140	EMVY350ADA470MF61G
	3,300	MH0	0.054	1,350	EMVY6R3□DA332MMH0S		68	F80	0.34	280	EMVY350ADA680MF80G
	4,700	LN0	0.038	1,630	EMVY6R3□DA472MLN0S		100	HA0	0.30	450	EMVY350□DA101MHA0G
	4,700	MH0	0.054	1,350	EMVY6R3□DA472MMH0S		220	HA0	0.30	450	EMVY350□DA221MHA0G
	6,800	LN0	0.038	1,630	EMVY6R3□DA682MLN0S		330	JA0	0.15	670	EMVY350□DA331MJA0G
10	6,800	MN0	0.038	1,750	EMVY6R3□DA682MMN0S		470	KE0	0.070	820	EMVY350□RA471MKE0S
	8,200	MN0	0.038	1,750	EMVY6R3□DA822MMN0S		470	LH0	0.054	1,260	EMVY350□DA471MLH0S
	22	E55	1.8	95	EMVY100ADA220ME55G	50	1,000	LH0	0.054	1,260	EMVY350□DA102MLH0S
	33	E55	1.8	95	EMVY100ADA330ME55G		1,000	MH0	0.054	1,350	EMVY350□DA102MMH0S
	47	F55	1.0	140	EMVY100ADA470MF55G		2,200	MN0	0.038	1,750	EMVY350□DA222MMN0S
	100	F55	1.0	140	EMVY100ADA101MF55G		1.0	D55	5.0	30	EMVY500ADA1R0MD55G
	220	F80	0.34	280	EMVY100ADA221MF80G		2.2	D55	5.0	30	EMVY500ADA2R2MD55G
	330	HA0	0.30	450	EMVY100□DA331MHA0G		3.3	D55	5.0	30	EMVY500ADA3R3MD55G
	470	HA0	0.30	450	EMVY100□DA471MHA0G		4.7	E55	3.0	50	EMVY500ADA4R7ME55G
	680	JA0	0.15	670	EMVY100□DA681MJA0G		10	F55	2.0	70	EMVY500ADA100MF55G
	1,000	JA0	0.15	670	EMVY100□DA102MJA0G		22	F55	2.0	70	EMVY500ADA220MF55G
	2,200	KG5	0.060	950	EMVY100□RA222MKG5S		33	F80	0.60	170	EMVY500ADA330MF80G
16	2,200	LH0	0.054	1,260	EMVY100□DA222MLH0S		47	F80	0.60	170	EMVY500ADA470MF80G
	3,300	LH0	0.054	1,260	EMVY100□DA332MLH0S	63	68	HA0	0.60	300	EMVY500□DA680MHA0G
	3,300	MH0	0.054	1,350	EMVY100□DA332MMH0S		100	HA0	0.60	300	EMVY500□DA101MHA0G
	4,700	LN0	0.038	1,630	EMVY100□DA472MLN0S		220	JA0	0.30	500	EMVY500□DA221MJA0G
	4,700	MN0	0.038	1,750	EMVY100□DA472MMN0S		330	KE0	0.11	650	EMVY500□RA331MKE0S
	6,800	MN0	0.038	1,750	EMVY100□DA682MMN0S		330	LH0	0.087	900	EMVY500□DA331MLH0S
	10	D55	3.0	60	EMVY160ADA100MD55G		470	LH0	0.087	900	EMVY500□DA471MLH0S
	22	E55	1.8	95	EMVY160ADA220ME55G		470	MH0	0.087	1,060	EMVY500□DA471MMH0S
	33	F55	1.0	140	EMVY160ADA330MF55G		1,000	MN0	0.050	1,520	EMVY500□DA102MMN0S
	47	F55	1.0	140	EMVY160ADA470MF55G	80	68	KE0	0.19	500	EMVY630□RA680MKE0S
	100	F55	1.0	140	EMVY160ADA101MF55G		100	KE0	0.19	500	EMVY630□RA101MKE0S
	220	F80	0.34	280	EMVY160ADA221MF80G		220	KE0	0.19	500	EMVY630□RA221MKE0S
	330	HA0	0.30	450	EMVY160□DA331MHA0G		220	LH0	0.12	845	EMVY630□DA221MLH0S
	470	HA0	0.30	450	EMVY160□DA471MHA0G		330	LH0	0.12	845	EMVY630□DA331MLH0S
	680	JA0	0.15	670	EMVY160□DA681MJA0G		330	MH0	0.12	905	EMVY630□DA331MMH0S
	1,000	KE0	0.070	820	EMVY160□RA102MKE0S		470	LN0	0.085	1,100	EMVY630□DA471MLN0S
	1,000	LH0	0.054	1,260	EMVY160□DA102MLH0S		470	MH0	0.12	905	EMVY630□DA471MMH0S
	2,200	LH0	0.054	1,260	EMVY160□DA222MLH0S		100	KE0	0.33	450	EMVY800□RA101MKE0S
	2,200	MH0	0.054	1,350	EMVY160□DA222MMH0S	100	220	KG5	0.26	550	EMVY800□RA221MKG5S
25	3,300	LN0	0.038	1,630	EMVY160□DA332MLN0S		330	LN0	0.16	900	EMVY800□DA331MLN0S
	3,300	MH0	0.054	1,350	EMVY160□DA332MMH0S		330	MH0	0.24	700	EMVY800□DA331MMH0S
	4,700	MN0	0.038	1,750	EMVY160□DA472MMN0S		470	MN0	0.16	950	EMVY800□DA471MMN0S
	10	E55	1.8	95	EMVY250ADA100ME55G		47	KE0	0.33	450	EMVY101□RA470MKE0S
	22	F55	1.0	140	EMVY250ADA220MF55G		68	KE0	0.33	450	EMVY101□RA680MKE0S
	33	F55	1.0	140	EMVY250ADA330MF55G		100	KE0	0.33	450	EMVY101□RA101MKE0S
	47	F55	1.0	140	EMVY250ADA470MF55G		100	LH0	0.24	650	EMVY101□DA101MLH0S
	100	F80	0.34	280	EMVY250ADA101MF80G		220	LN0	0.16	900	EMVY101□DA221MLN0S
	220	HA0	0.30	450	EMVY250□DA221MHA0G		220	MH0	0.24	700	EMVY101□DA221MMH0S
	330	HA0	0.30	450	EMVY250□DA331MHA0G		330	MN0	0.16	950	EMVY101□DA331MMN0S

□ : Enter the appropriate terminal code.

◆RATED RIPLE CURRENT MULTIPLIERS

●Frequency Multipliers

Size code	Capacitance(μF)	Frequency(Hz)	120	1k	10k	100k
D55 to JA0	1.0 to 4.7		0.35	0.70	0.90	1.00
	10 to 100		0.40	0.75	0.90	1.00
	220 to 470		0.50	0.85	0.94	1.00
	680 to 1,500		0.60	0.87	0.95	1.00
KE0 to MN0	47 to 100		0.40	0.75	0.90	1.00
	220 to 470		0.50	0.85	0.94	1.00
	1,000		0.60	0.87	0.95	1.00
	2,200 to 3,300		0.75	0.90	0.95	1.00
	4,700 to 8,200		0.85	0.95	0.98	1.00

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

United Chemi-Con (UCC):

EMVY160GDA102MLH0S	EMVY500ADA101MHA0G	EMVY101GTR101MKE0S	EMVY630ARA101MKE0S
EMVY160ARA102MKE0S	EMVY101GTR331MMN0S	EMVY350ARA471MKE0S	EMVY800ARA101MKE0S
EMVY350GDA471MLH0S	EMVY6R3ARA332MKG5S	EMVY101BTR331MMN0S	EMVY101ARA470MKE0S
EMVY250ADA101MF80G	EMVY500BTR471MMH0S	EMVY101ATR101MKE0S	EMVY500ARA331MKE0S
EMVY101GDA331MMN0S	EMVY250GDA332MMN0S	EMVY250GDA102MMH0S	EMVY100GDA472MLN0S
EMVY350ARA681MKE0S	EMVY101GDA101MLH0S	EMVY350GDA102MMH0S	EMVY350GTR222MMN0S
EMVY630GDA331MLH0S	EMVY6R3GDA472MLN0S	EMVY101GDA221MMH0S	EMVY101ARA680MKE0S
EMVY350ADA102MLH0S	EMVY100GDA682MMN0S	EMVY101GTR101MLH0S	EMVY101GRA101MKE0S
EMVY800ARA221MKG5S	EMVY101ADA101MLH0S	EMVY500GDB331MLH0S	EMVY160GDA472MMN0S
EMVY101GDA221MLN0S	EMVY500GDA102MMN0S	EMVY630ARA221MKE0S	EMVY6R3ARA222MKE0S
EMVY100ARA222MKG5S	EMVY250GDA222MMN0S	EMVY250GTR102MLH0S	EMVY500GDA331MLH0S
EMVY630ADA331MLH0S	EMVY250GDA222MLN0S	EMVY350GDA222MMN0S	EMVY630GDA471MLN0S
EMVY630ARA680MKE0S	EMVY6R3GDA822MMN0S	EMVY630GDA471MMH0S	EMVY350GDA102MLH0S
EMVY500GDA471MLH0S	EMVY800GTR331MLN0S		