

1A, 50V - 600V Surface Mount Super Fast Rectifiers

FEATURES

- Glass passivated junction chip
- Ideal for automated placement
- Low profile package
- Low power loss, high efficiency
- Compliant to RoHS Directive 2011/65/EU and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21 definition



MECHANICAL DATA

Case: Sub SMA

Molding compound, UL flammability classification rating 94V-0

Moisture sensitivity level: level 1, per J-STD-020

Part No. with suffix "H" means AEC-Q101 qualified

Packing code with suffix "G" means green compound (halogen-free)

Terminal: Matte tin plated leads, solderable per JESD22-B102

Meet JESD 201 class 2 whisker test

Polarity: Indicated by cathode band

Weight: 0.019 g (approximately)

Sub SMA

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (T _A =25°C unless otherwise noted)										
PARAMETER	SYMBOL	ES 1AL	ES 1BL	ES 1CL	ES 1DL	ES 1FL	ES 1GL	ES 1HL	ES 1JL	UNIT
Marking code		EAL	EBL	ECL	EDL	EFL	EGL	EHL	EJL	
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	150	200	300	400	500	600	V
Maximum RMS voltage	V _{RMS}	35	70	105	140	210	280	350	420	V
Maximum DC blocking voltage	V _{DC}	50	100	150	200	300	400	500	600	V
Maximum average forward rectified current	I _{F(AV)}	1								A
Peak forward surge current, 8.3 ms single half sine-wave superimposed on rated load	I _{FSM}	30								A
Maximum instantaneous forward voltage (Note 1) @ 1 A	V _F	0.95				1.3		1.7		V
Maximum reverse current @ rated V _R T _J =25°C T _J =125°C	I _R	5 100								μA
Typical junction capacitance (Note 2)	C _J	10				8				pF
Maximum reverse recovery time (Note 3)	t _{rr}	35								ns
Typical thermal resistance	R _{θJL} R _{θJA}	35 85								°C/W
Operating junction temperature range	T _J	- 55 to +150								°C
Storage temperature range	T _{STG}	- 55 to +150								°C

Note 1: Pulse test with PW=300μs, 1% duty cycle

Note 2: Measured at 1 MHz and Applied V_R=4.0 Volts.

Note 3: Reverse Recovery Test Conditions: I_F=0.5A, I_R=1.0A, I_{RR}=0.25A

ORDERING INFORMATION					
PART NO.	PART NO. SUFFIX	PACKING CODE	PACKING CODE SUFFIX	PACKAGE	PACKING
ES1xL (Note 1)	H	RU	G	Sub SMA	1,800 / 7" Plastic reel (8mm tape)
		RV		Sub SMA	3,000 / 7" Plastic reel (8mm tape)
		RT		Sub SMA	7,500 / 13" Paper reel (8mm tape)
		MT		Sub SMA	7,500 / 13" Plastic reel (8mm tape)
		RQ		Sub SMA	10,000 / 13" Paper reel (8mm tape)
		MQ		Sub SMA	10,000 / 13" Plastic reel (8mm tape)
		R3		Sub SMA	1,800 / 7" Plastic reel (12mm tape)
		RF		Sub SMA	3,000 / 7" Plastic reel (12mm tape)
		R2		Sub SMA	7,500 / 13" Paper reel (12mm tape)
		M2		Sub SMA	7,500 / 13" Plastic reel (12mm tape)
		RH		Sub SMA	10,000 / 13" Paper reel (12mm tape)
		MH		Sub SMA	10,000 / 13" Plastic reel (12mm tape)

Note 1: "x" defines voltage from 50V (ES1AL) to 600V (ES1JL)

EXAMPLE					
PREFERRED P/N	PART NO.	PART NO. SUFFIX	PACKING CODE	PACKING CODE SUFFIX	DESCRIPTION
ES1JLHRUG	ES1JL	H	RU	G	AEC-Q101 qualified Green compound

RATINGS AND CHARACTERISTICS CURVES (T_A=25°C unless otherwise noted)

FIG.1 FORWARD CURRENT DERATING CURVE

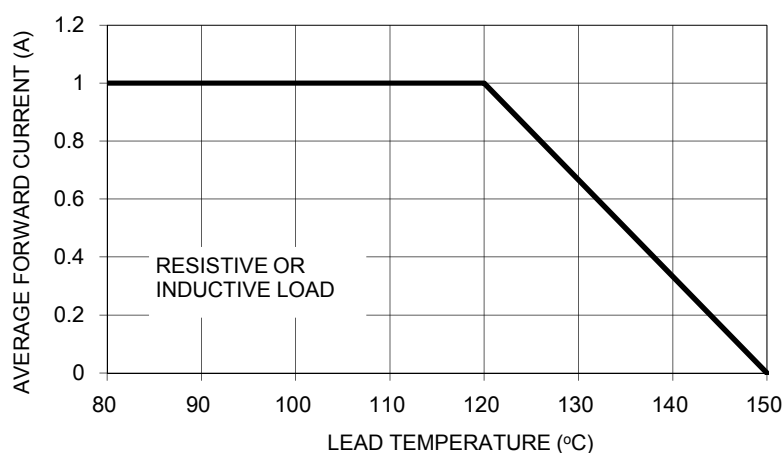


FIG. 2 TYPICAL FORWARD CHARACTERISTICS

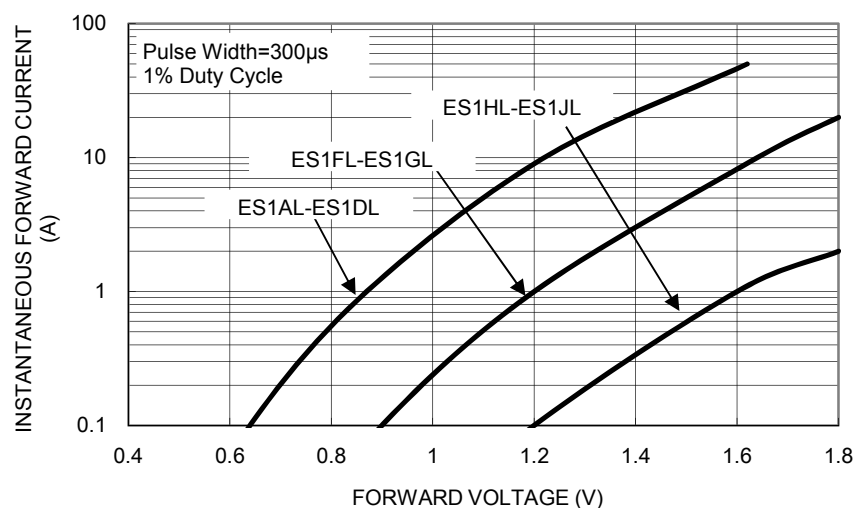


FIG. 3 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

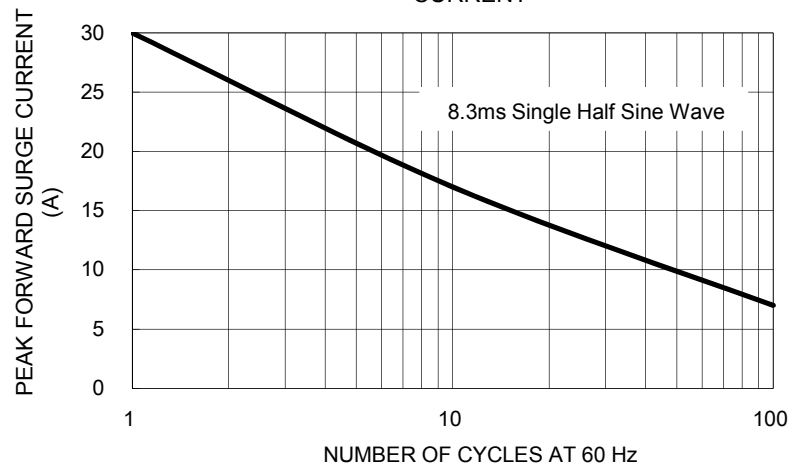


FIG. 4 TYPICAL REVERSE CHARACTERISTICS

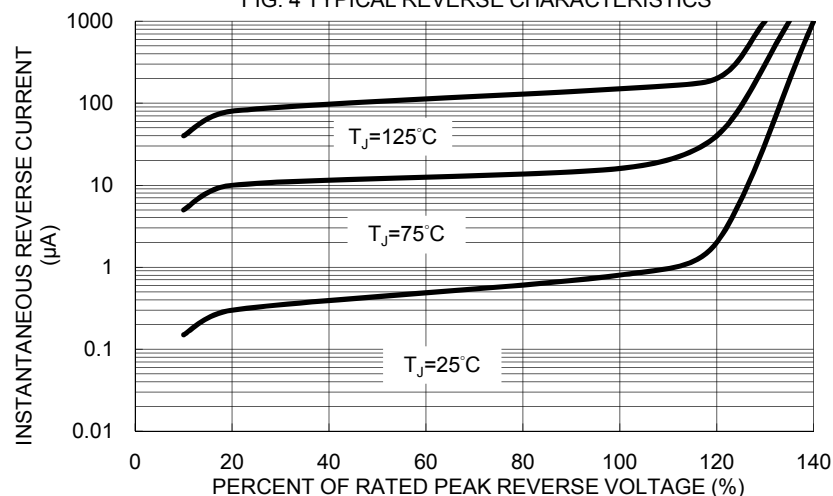


FIG. 5 TYPICAL JUNCTION CAPACITANCE



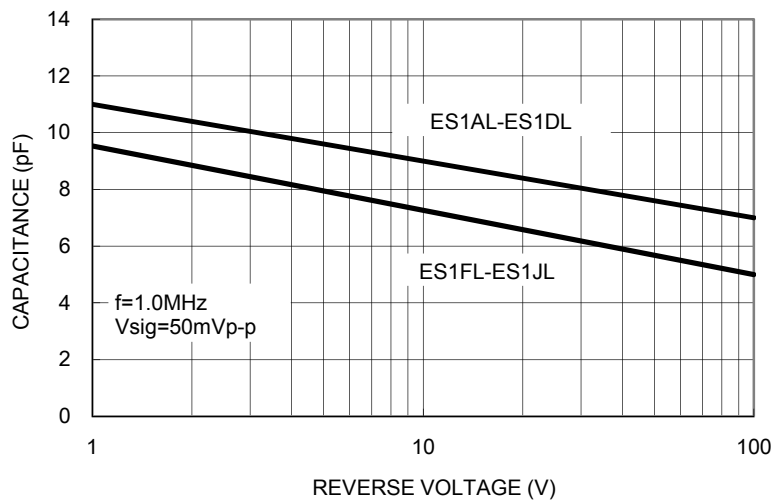


FIG.6- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

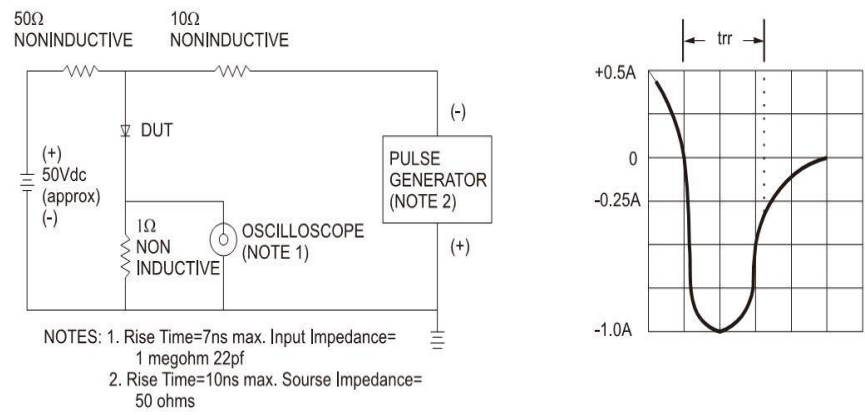


PACKAGE OUTLINE DIMENSIONS

Sub SMA

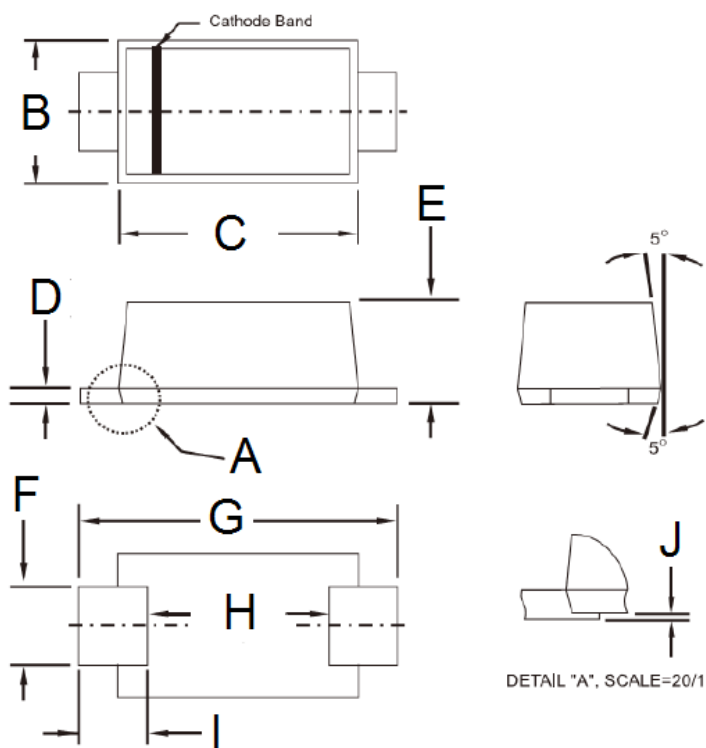

DIM.	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
B	1.70	1.90	0.067	0.075
C	2.70	2.90	0.106	0.114
D	0.16	0.30	0.006	0.012
E	1.23	1.43	0.048	0.056
F	0.80	1.20	0.031	0.047
G	3.40	3.80	0.134	0.150
H	2.45	2.60	0.096	0.102
I	0.35	0.85	0.014	0.033
J	0.00	0.10	0.000	0.004

SUGGESTED PAD LAYOUT

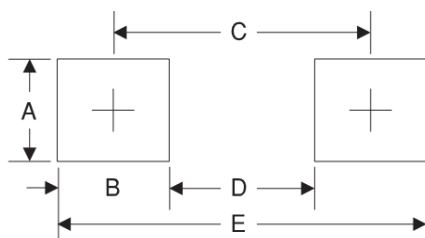

Symbol	Unit (mm)	Unit (inch)
A	1.4	0.055
B	1.2	0.047
C	3.1	0.122
D	1.9	0.075
E	4.3	0.169

MARKING DIAGRAM



P/N = Marking Code
G = Green compound Code
YW = Date Code
F = Factory Code

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Taiwan Semiconductor:

[ES1AL](#) [ES1BL](#) [ES1CL](#) [ES1DL](#) [ES1FL](#) [ES1GL](#) [ES1HL](#) [ES1JL](#) [ES1DL RQ](#) [ES1DLHR2](#) [ES1DL R2](#) [ES1DL R3G](#)
[ES1DLHRQG](#) [ES1DLHRQ](#) [ES1DL R2G](#) [ES1DLHR3](#) [ES1DLHR3G](#) [ES1DLHR2G](#) [ES1DL RQG](#) [ES1GL R2](#)
[ES1BLHR2G](#) [ES1ALHRQG](#) [ES1FLHRQ](#) [ES1BLHR3](#) [ES1CL R2](#) [ES1HLHR2G](#) [ES1FL RQG](#) [ES1HLHR2](#) [ES1CL](#)
[R2G](#) [ES1FLHRQG](#) [ES1BLHRQ](#) [ES1CLHR3G](#) [ES1BLHR2](#) [ES1BL RQG](#) [ES1GLHR3](#) [ES1HLHRQG](#) [ES1GL R3G](#)
[ES1FLHR3](#) [ES1ALHR3G](#) [ES1HL R3G](#) [ES1AL R2G](#) [ES1AL RQ](#) [ES1BLHRQG](#) [ES1BL R3G](#) [ES1JLHR3G](#)
[ES1HLHR3G](#) [ES1HL R2G](#) [ES1JL R2G](#) [ES1ALHR3](#) [ES1AL R3G](#) [ES1CLHRQG](#) [ES1ALHRQ](#) [ES1BL R2](#)
[ES1HLHRQ](#) [ES1JLHR2G](#) [ES1FLHR2G](#) [ES1GLHRQ](#) [ES1GL R2G](#) [ES1CL R3G](#) [ES1BLHR3G](#) [ES1FL RQ](#)
[ES1GLHR2](#) [ES1HL RQ](#) [ES1CLHRQ](#) [ES1JLHR3](#) [ES1FL R2G](#) [ES1ALHR2G](#) [ES1ALHR2](#) [ES1JLHRQG](#) [ES1AL RQG](#)
[ES1JLHR2](#) [ES1CLHR2](#) [ES1GLHRQG](#) [ES1CLHR3](#) [ES1FLHR2](#) [ES1HLHR3](#) [ES1FL R2](#) [ES1JLHRQ](#) [ES1HL R2](#)
[ES1GL RQG](#) [ES1GLHR2G](#) [ES1HL RQG](#) [ES1CL RQ](#) [ES1CLHR2G](#) [ES1FL R3G](#) [ES1BL R2G](#) [ES1JL RQG](#)
[ES1FLHR3G](#) [ES1CL RQG](#) [ES1JL R3G](#) [ES1GLHR3G](#) [ES1GL RQ](#) [ES1BL RQ](#) [ES1AL R2](#)