


2NV Detector Switches

Type: **ESE21**




■ Features

- External dimensions : 3.4 mm×3.8 mm, Height 2.3 mm
- Light operating force
- Reflow soldering

■ Recommended Applications

- Detection of media in portable electronic equipment
- Detection of flaps (of folded body) for cellular phones

■ Explanation of Part Numbers

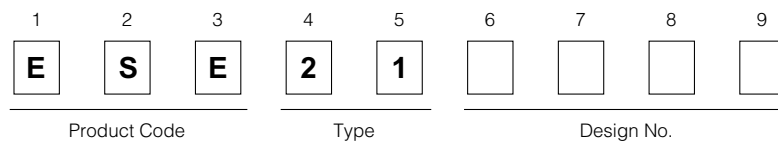


■ Specifications

Rating	50 μ A 3 Vdc to 10 mA 5 Vdc (Resistive load)
Contact Resistance	500 m Ω max.
Insulation Resistance	100 M Ω min. (100 Vdc)
Dielectric Withstanding Voltage	100 Vac for 1 minute
Operating Force	300 mN max.
Mounting Height	2.3 mm
Poles and Throws	1-pole 1-throw
Full Travel (Pushing distance)	· N.O : Height=3.8 mm 2.3 mm (1.5 mm) · N.C : Height=3.6 mm 2.3 mm (1.3 mm) · N.O : Height=4.8 mm 3.3 mm (1.5 mm)
Operating Life	50000 cycles min.
Temperature Range	-10 °C to +60 °C
Heat Resistance	+80 °C for 96 hours
Low Temperature Resistance	-25 °C for 96 hours
Humidity Resistance	+40 °C 90 % to 95 % RH for 96 hours
Minimum Quantity/Packing Unit	2000 pcs. Embossed Taping (Reel Pack)
Quantity/Carton	12000 pcs.

■ Dimensions in mm (not to scale)


[illegible]

■ Circuit Diagram

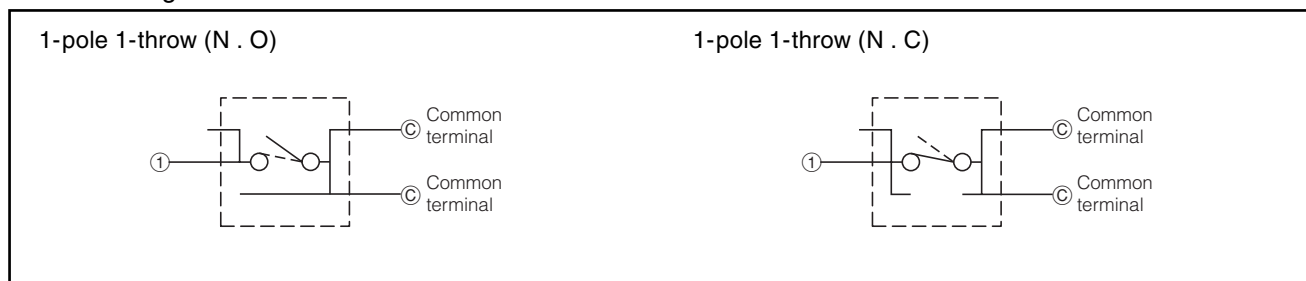

■ Packaging Specifications

Standard Reel Dimensions in mm (not to scale)

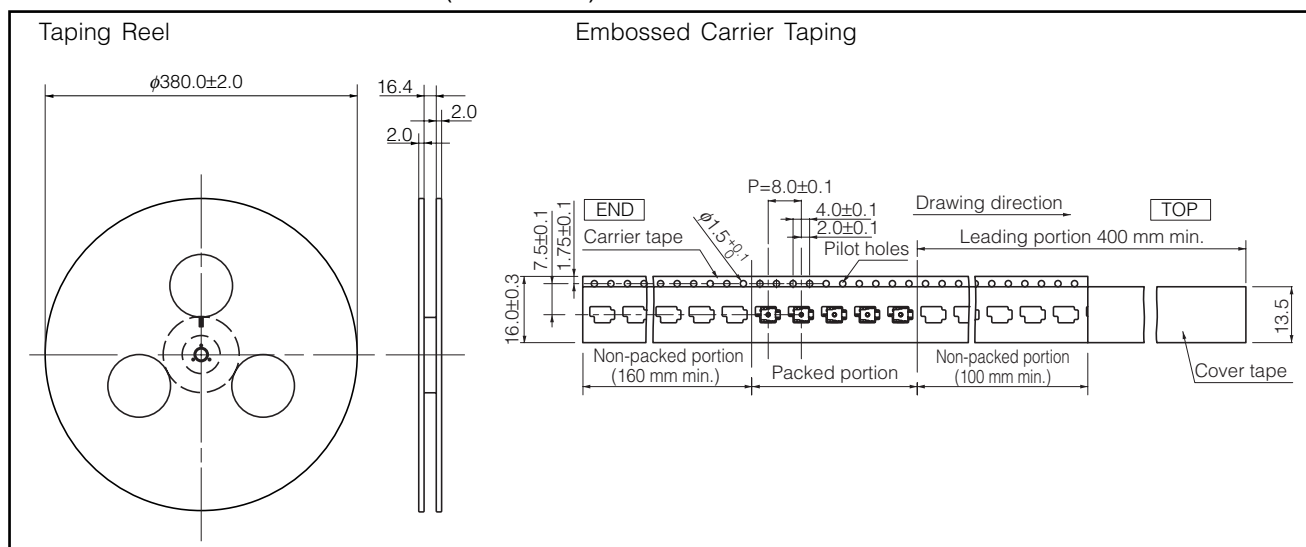

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Panasonic:](#)

[ESE-2121AT](#) [ESE-2121BT](#) [ESE-2131AT](#) [ESE-2141BT](#) [ESE-2151BT](#) [ESE-2161AT](#) [ESE-2161BT](#) [ESE-2131BT](#)