


2N Detector Switches

Type: **ESE22**




■ Features

- Can be operated with different actuation angles (horizontally and vertically)
- Reflow soldering
- Light operating force

■ Recommended Applications

- Detection of media in portable electronic equipment

■ Explanation of Part Numbers

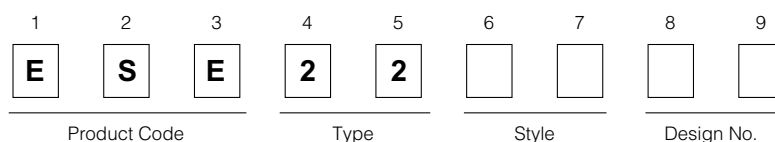

■ Specifications

Rating	50 μ A 3 Vdc to 10 mA 5 Vdc (Resistive load)		
Contact Resistance	500 m Ω max. (Initial)		
Insulation Resistance	100 M Ω min. (100 Vdc)		
Dielectric Withstanding Voltage	100 Vac for 1 minute		
Operating Force	300 mN max.		
Mounting Height	· Type MV 4.1 mm · Type MH 2.1 mm · Type MH with Frame 2.85 mm		
Poles and Throws	1-pole 1-throw		
Full Travel (Pushing distance)	· Type MV 4.25 mm(2.05 mm) · Type MH 1.2 mm(2.0 mm) · Type MH with Frame 0.6 mm(2.0 mm)		
Operating Life	50000 cycles min.		
Temperature Range	-10 °C to +70 °C		
Heat Resistance	+80 °C for 96 hours		
Low Temperature Resistance	-25 °C for 96 hours		
Humidity Resistance	+40 °C 90 % to 95 % RH for 96 hours		
Minimum Quantity/Packing Unit	500 pcs. Polyethylene Bag (Bulk)		
	· Type MV	1000 pcs.	Embossed Taping (Reel Pack)
	· Type MH with Frame	3000 pcs.	Embossed Taping (Reel Pack)
	· Type MH	4000 pcs.	Embossed Taping (Reel Pack)
Quantity/Carton	10000 pcs. Polyethylene Bag (Bulk)		
	· Type MV	6000 pcs.	Embossed Taping (Reel Pack)
	· Type MH with Frame	18000 pcs.	Embossed Taping (Reel Pack)
	· Type MH	24000 pcs.	Embossed Taping (Reel Pack)

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

00 Oct. 2012

■ Dimensions in mm (not to scale)

[illegible]

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

Part Numbers	Packaging	Part Numbers	Packaging
ESE22MH53	Polyethylene Bag (Bulk)	ESE22MH57	Polyethylene Bag (Bulk)
ESE22MH54	Embossed Taping (Reel Pack)	No. 6	1-pole 1-throw
No. 5	1-pole 1-throw	Solder lug Type	
With Frame Type			
Part Numbers	Packaging	■ Circuit Diagram 1-pole 1-throw (N.O)	
ESE22MH58	Polyethylene Bag (Bulk)	■ Packaging Specifications Standard Reel Dimensions in mm (not to scale) Taping Reel Embossed Carrier Taping	
No. 7	1-pole 1-throw		
Solder lug Type			

00 Oct. 2012

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com