


2W Detector Switches

Type: **ESE24**

Bidirectional operation, auto-return to midpoint type.

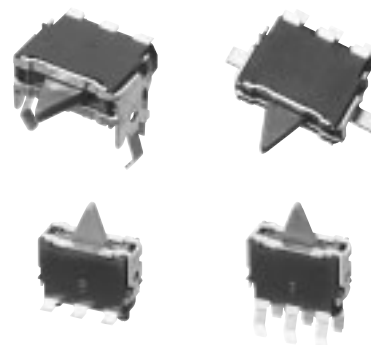

■ Features

- A lever-type detector switch with high reliability using sliding mechanical contacts
- Long over-travel (through-operation available)
- Used as an operation switch (an input device)

■ Recommended Applications

- Detection of media in portable electronic equipment (CD-ROM, DVD, Digital still cameras, etc.)
- Operating switches for other electronic equipment.

■ Explanation of Part Number

1	2	3	4	5	6	7	8	9
E	S	E	2	4				
Product Code			Type		Style		Design No.	

6th & 7th	Mounting Method & Style
SV	Vertical type for wave soldering
SH	Horizontal type for wave soldering
MV	Vertical type for reflow soldering
MH	Horizontal type for reflow soldering

■ Specifications

Rating		50 μ A 3 Vdc to 10 mA 5 Vdc (Resistive load)
Contact Resistance		500 m Ω max. (Initial)
Insulation Resistance		100 M Ω min. (100 Vdc)
Dielectric Withstanding Voltage		100 Vac for 1 minute
Operating Force		350 mN max.
Mounting Height		· Type SV 5.6 mm · Type SH 4.65 mm · Type MV 5.6 mm · Type MH 3.0 mm
Poles and Throws		1-pole 2-throws (OFF at midpoint)
Full Travel (Pushing distance)		· Type SV 6.1 mm (2.45 mm) · Type SH 2.6 mm (2.45 mm) · Type MV 6.1 mm (2.45 mm) · Type MH 1.4 mm (2.45 mm)
Operating Life		50000 cycles min.
Temperature Range		-10 °C to +70 °C
Heat Resistance		+80 °C for 96 hours
Low Temperature Resistance		-25 °C for 96 hours
Humidity Resistance		+40 °C 90 % to 95 % RH for 96 hours
Minimum Quantity/Packing Unit	ESE24MH, MV, SV, SH	200 pcs. Polyethylene Bag (Bulk) ^{*1}
	ESE24MH□T	1000 pcs. Embossed Taping (Reel Pack) ^{*2}
	ESE24MV□T	500 pcs. Embossed Taping (Reel Pack)
Quantity/Carton	ESE24MH, MV, SV, SH	10000 pcs. Polyethylene Bag (Bulk)
	ESE24MH□T	6000 pcs. Embossed Taping (Reel Pack)
	ESE24MV□T	3000 pcs. Embossed Taping (Reel Pack)

^{*1} ESE24SH type: 160 pcs. (Polyethylene Bag), 8000 pcs. (Reel Pack)

^{*2} ESE24SV, ESE24SH are excluded

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.


00 Oct. 2012

No. 1	ESE24SV3 Vertical type for wave soldering 1-pole 2-throws	No. 2	ESE24SH1 Horizontal type for wave soldering 1-pole 2-throws
PWB mounting hole for reference (Pitch tolerance: ±0.05) (PWB thickness=0.8)		PWB mounting hole for reference (Pitch tolerance: ±0.05) (PWB thickness=0.8)	
No. 3 ESE24MV1 Vertical type for reflow soldering 1-pole 2-throws ESE24MV1T (Embossed Taping)		No. 4 ESE24MH1 Horizontal type for reflow soldering 1-pole 2-throws ESE24MH1T (Embossed Taping)	
PWB mounting hole for reference (Tolerance: ±0.05)		PWB mounting hole for reference (Tolerance: ±0.05)	

00 Oct. 2012

Circuit Diagram

1-pole 2-throws (N . O)




Terminal No. Lever position	①	②
F		
a		
b		

Packaging Specifications


Standard Reel Dimensions in mm (not to scale)

Taping Reel

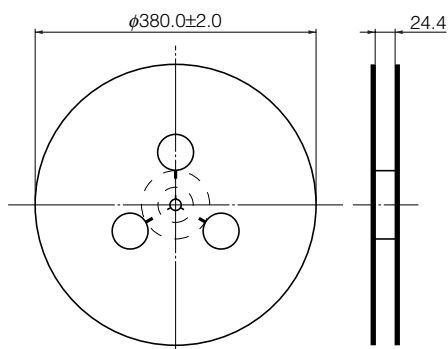


Embossed Carrier Taping

ESE24MH□T

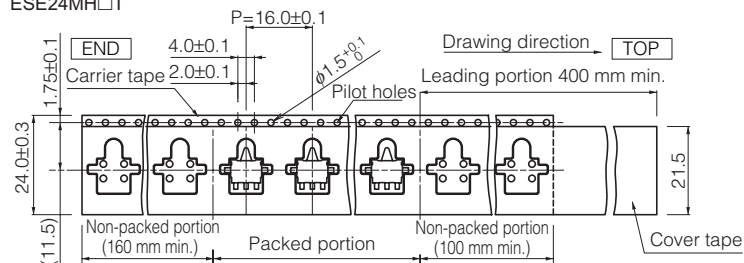

ESE24MV□T

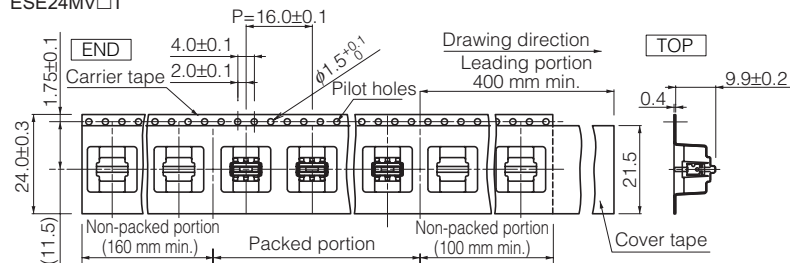

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic:

[ESE-24CSV3](#) [ESE-24MV1T](#) [ESE-24CSH1](#) [ESE-24CSV6](#) [ESE-24SH6](#) [ESE-24MV6T](#) [ESE-24SV6](#) [ESE-24CMH6T](#)
[ESE-24MH6T](#) [ESE-24CMH1T](#) [ESE-24CSH6](#) [ESE-24CMV1T](#)