

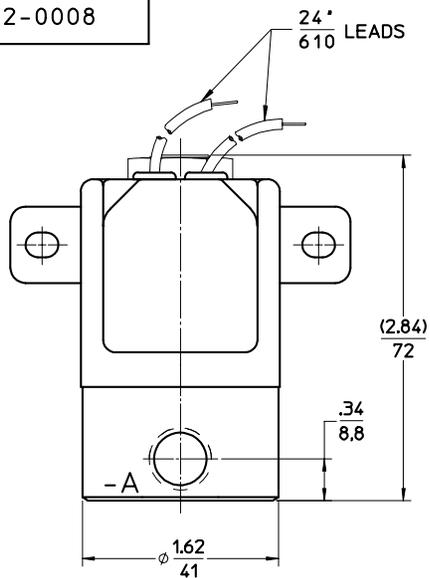


DWG. NO.
GE2-0008


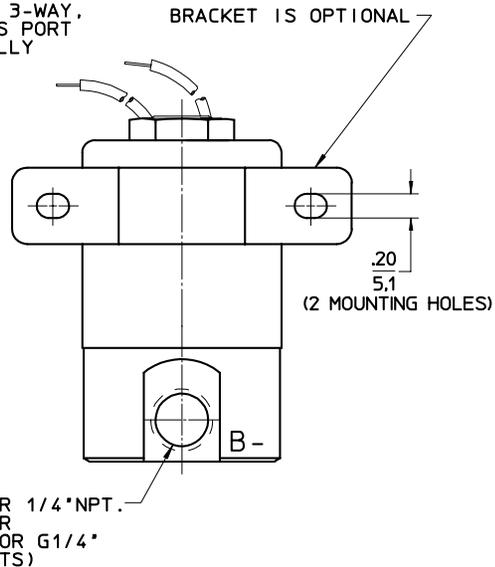


5/16"-18 UNC-2B THREADED SOLENOID
NORMALLY OPEN PORT FOR 2-WAY &
3-WAY OR EXHAUST PORT FOR 3-WAY,
7-WAY & 8-WAY VALVES. THIS PORT
IS NOT SUPPLIED FOR NORMALLY
CLOSED 2-WAY VALVES.

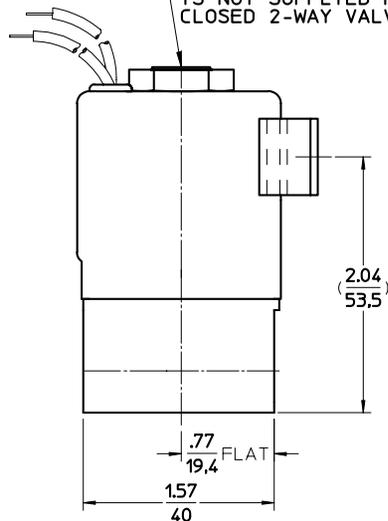

1/8" OR 1/4" NPT.
OR
G1/8" OR G1/4"
(2 PORTS)

#10-32UNF-2B x .31 (8mm) DEPTH
OR
M4 x .31 (8mm) DEPTH
(2 MOUNTING HOLES)

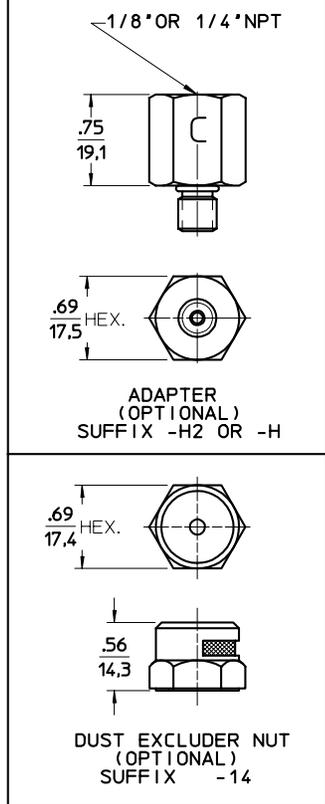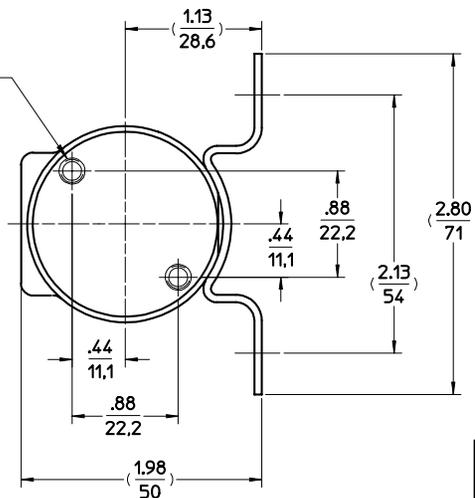

- NOTES:
1) S.A.E. PORT MARKINGS SHOWN. I.S.O. FORMAT USED ON METRIC PORTED VALVES.
2) PRODUCT SHOWN WITH STANDARD 24° WIRE LEADS. ADDITIONAL WIRE LEAD LENGTHS AVAILABLE BY SPECIFYING THE APPROPRIATE SUFFIX DETAIL.

13295	JMC 11-18-05
ADDED METRIC PORTING AND METRIC MOUNTING HOLE SIZES TO DRAWING.	
13295	JMC 11-18-05
ADDED METRIC PORTING AND METRIC MOUNTING HOLE SIZES TO DRAWING.	
REVISION LEVEL	

DRAWN BY NG 3-4-98	CHECKED BY JMC 4-1-98 MJR 4-28-98	ENG APP'D 9976	ORIG EWR B	TITLE VALVE ASSEMBLY
MATL	SCALE 1:1	NEXT ASSY	DWG SIZE B	
HARDNESS UNLESS OTHERWISE SPECIFIED				
HEAT TREAT 2 PLACE DECIMAL ±.010 ANGULAR DIMENSIONS ±1/2° 3 PLACE DECIMAL ±.003 BREAK CORNERS & EDGES .010 DIA'S ON SAME CENTERLINE CONCENTRIC WITHIN .006 T.J.R. MACHINED SURFACES, FINISHED TO 64 R.M.S. MAX.				
DO NOT SCALE DRAWING				
THIS DRAWING IS CAD GENERATED AND THE PROPERTY OF VERSA PRODUCTS CO., INC. USE AND/OR REPRODUCTION OF ANY PORTION MUST BE WITH THE APPROVAL OF VERSA				
DWG. NO. GE2-0008				VERSAPRODUCTS CO., INC. PARAMUS N.J., U.S.A. VERSA BV, NETHERLANDS

IN
MM