

SWT/EWT Series

Non-Flammable Edgewound Tubular Wirewound Resistor


Stackpole Electronics, Inc.

Resistive Product Solutions

- Features:
- High current capability
 - RoHS compliant / lead-free
 - Non-inductive style only available with silicone coating (NSWT)
 - Suitable for soldering or thru bolt connections
 - Wirewound ribbon on ceramic substrate
 - SWT – Silicone coating provides temperature handling up to 350°C
 - SWTA – Adjustable version
 - EWT – Vitreous enamel coating provides temperature handling up to 500°C




Electrical Specifications					
Type / Code	Power Rating (Watts) @ 70°C	Dielectric Strength VAC	Ohmic Range (Ω) and Tolerance 5% and 10%		
			SWT	NSWT	EWT
SWT12 / EWT12	12W	1,000	0.1 - 51K	0.1 - 53	0.1 - 5K
SWT25 / EWT25	25W	2,500	1 - 30K	0.1 - 100	0.1 - 10K
SWT50 / EWT50	50W	2,500	0.1 - 50K	0.1 - 275	0.1 - 20K
SWT100 / EWT100	100W	2,500	0.1 - 100K	0.12 - 680	0.1 - 50K
SWT150 / EWT150	150W	2,500	0.1 - 150K	0.22 - 1.5K	0.1 - 80K
SWT175 / EWT175	175W	2,500	0.15 - 100K	0.24 - 1.3K	0.1 - 100K
SWT200 / EWT200	200W	2,500	0.1 - 200K	0.25 - 1.35K	0.1 - 120K
SWT225 / EWT225	225W	2,500	0.2 - 130K	0.3 - 1.7K	0.12 - 130K
SWT250 / EWT250	250W	2,500	0.5 - 250K	0.33 - 1.8K	0.5 - 200K
SWT300 / EWT300	300W	2,500	0.5 - 300K	0.42 - 2.25K	0.5 - 240K
SWT400 / EWT400	400W	2,500	0.5 - 400K	0.54 - 3K	0.5 - 300K
SWT500 / EWT500	500W	2,500	0.5 - 500K	0.77 - 4.2K	0.5 - 400K
SWT700 / EWT700	700W	2,500	1 - 600K	1 - 5.3K	1 - 500K
SWT1000 / EWT1000	1000W	2,500	1 - 1M	1.4 - 7.6K	1 - 750K
SWT1300 / EWT1300	1300W	2,500	1 - 1.3M	2 - 10K	1 - 1M

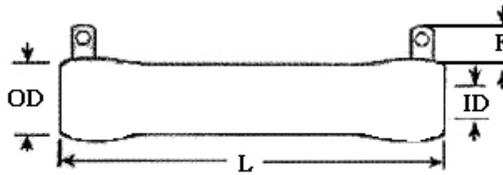


Mechanical Specifications					
Type / Code(1)	OD	ID	F	L	Unit
SWT12 / EWT12	0.31 ± 0.04	0.188 ± 0.04	0.47 ± 0.04	1.75 ± 0.08	inches
	7.94 ± 1.0	4.76 ± 1.0	12.0 ± 1.0	44.5 ± 2.0	mm
SWT25 / EWT25	0.56 ± 0.04	0.31 ± 0.04	0.47 ± 0.04	2.00 ± 0.08	inches
	14.3 ± 1.0	7.94 ± 1.0	12.0 ± 1.0	51.0 ± 2.0	mm
SWT50 / EWT50	0.56 ± 0.04	0.31 ± 0.04	0.75 ± 0.04	4.00 ± 0.08	inches
	14.3 ± 1.0	7.94 ± 1.0	19.0 ± 1.0	102.0 ± 2.0	mm
SWT100 / EWT100	0.75 ± 0.04	0.5 ± 0.04	0.67 ± 0.04	6.5 ± 0.08	inches
	19.1 ± 1.0	12.7 ± 1.0	17.0 ± 1.0	165.0 ± 2.0	mm
SWT150 / EWT150	1.1 ± 0.04	0.75 ± 0.04	0.67 ± 0.04	7.11 ± 0.08	inches
	28.0 ± 1.0	19.1 ± 1.0	17.0 ± 1.0	206.0 ± 2.0	mm
SWT175 / EWT175	1.13 ± 0.04	0.75 ± 0.04	0.67 ± 0.04	8.5 ± 0.08	inches
	28.6 ± 1.0	19.1 ± 1.0	17.0 ± 1.0	216.0 ± 2.0	mm
SWT200 / EWT200	1.38 ± 0.04	0.75 ± 0.04	0.67 ± 0.04	8.74 ± 0.08	inches
	35.0 ± 1.0	19.1 ± 1.0	17.0 ± 1.0	222.0 ± 2.0	mm
SWT225 / EWT225	1.125 ± 0.04	0.75 ± 0.04	0.71 ± 0.04	10.5 ± 0.08	inches
	28.6 ± 1.0	19.1 ± 1.0	18.0 ± 1.0	267.0 ± 2.0	mm
SWT250 / EWT250	1.57 ± 0.04	1.125 ± 0.04	0.71 ± 0.04	8.74 ± 0.08	inches
	40 ± 1.0	28.6 ± 1.0	18.0 ± 1.0	222.0 ± 2.0	mm
SWT300 / EWT300	1.57 ± 0.04	1.125 ± 0.04	0.71 ± 0.04	10.71 ± 0.08	inches
	40 ± 1.0	28.6 ± 1.0	18.0 ± 1.0	272.0 ± 2.0	mm
SWT400 / EWT400	1.57 ± 0.04	1.125 ± 0.04	0.71 ± 0.04	13.46 ± 0.08	inches
	40.0 ± 1.0	28.6 ± 1.0	18.0 ± 1.0	342.0 ± 2.0	mm
SWT500 / EWT500	2.5 ± 0.04	1.75 ± 0.04	1.1 ± 0.04	12 ± 0.08	inches
	63.5 ± 1.0	44.5 ± 1.0	28.0 ± 1.0	305.0 ± 2.0	mm
SWT700 / EWT700	1.97 ± 0.04	1.41 ± 0.04	1.1 ± 0.04	18.18 ± 0.08	inches
	50.0 ± 1.0	35.7 ± 1.0	28.0 ± 1.0	462.0 ± 2.0	mm
SWT1000 / EWT1000	2.50 ± 0.04	1.75 ± 0.04	1.18 ± 0.04	20 ± 0.08	inches
	63.5 ± 1.0	44.5 ± 1.0	30.0 ± 1.0	508.0 ± 2.0	mm
SWT1300 / EWT1300	2.56 ± 0.04	1.75 ± 0.04	1.18 ± 0.04	26.26 ± 0.08	inches
	65.0 ± 1.0	44.5 ± 1.0	30.0 ± 1.0	667.0 ± 2.0	mm

(1) EWT and NSWT series will have the same Mechanical Specifications as SWT series

Power Derating Curve:

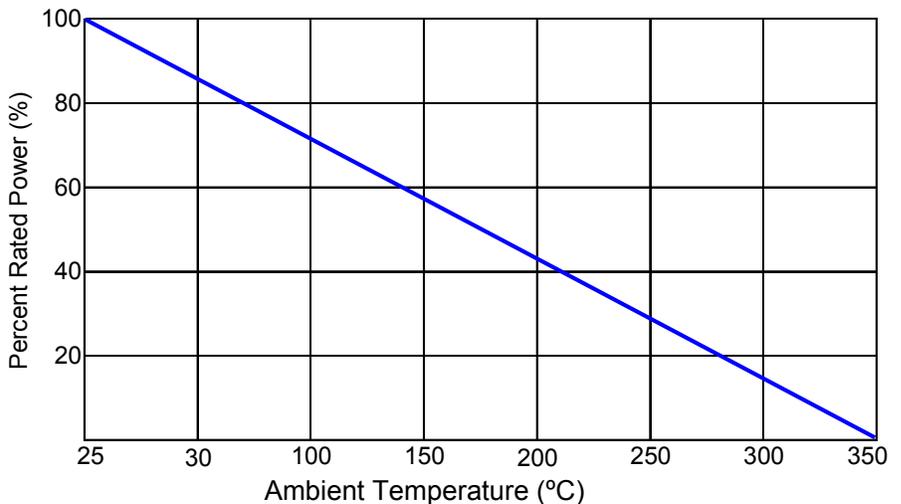

How to Order

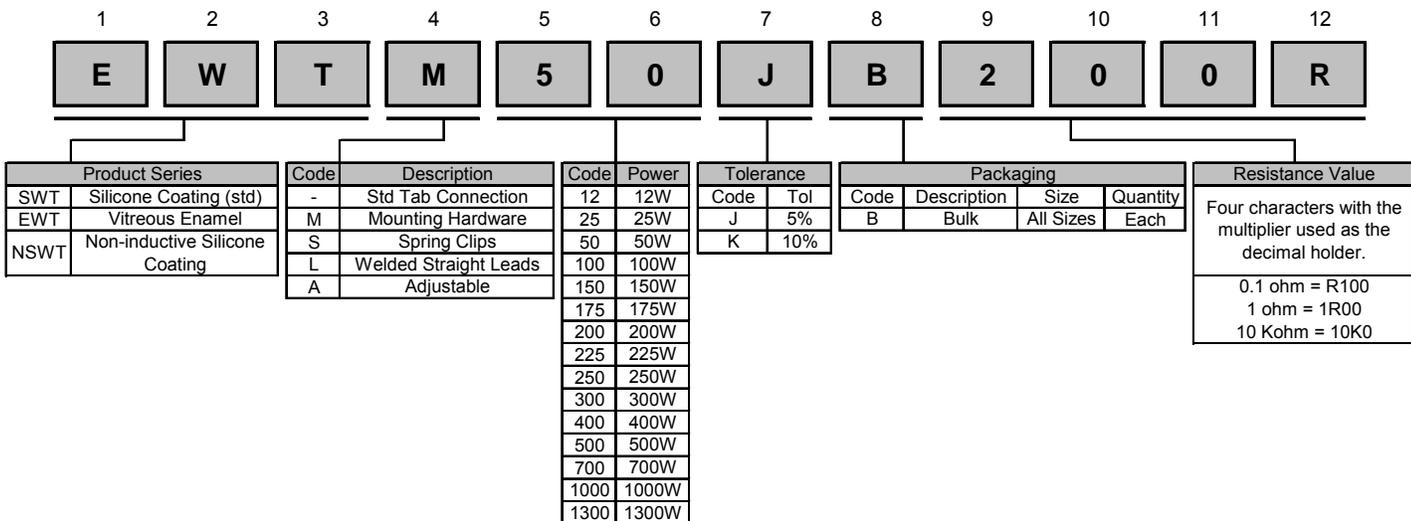

Legacy Part Number (before January 3, 2011):

SEI Type		Termination		Power Rating	Nominal Resistance	Tolerance	Packaging	
EWT		M		50	200	5%	B	
Type	Description	Code	Description	Code		Tolerance	Code	Description
SWT	Silicone Coating (std)	-	Std Tab Connection	12		5%	B	bulk
EWT	Vitreous Enamel	M	Mounting Hardware	25		10%		
NSWT	Non-Inductive Silicone Coating	S	Spring Clips	50				
		L	Welded Straight Leads	100				
		A	Adjustable	150				
				175				
				200				
				225				
				250				
				300				
				400				
				500				
		700						
		1000						
		1300						