

Chip Attenuator

Type: **EXB 14AT**
EXB 24AT



Features

- Unbalanced π type attenuator circuit in one chip
EXB14AT (0.8 mm $\times$ 0.6 mm), EXB24AT (1.0 mm $\times$ 1.0 mm)
- Reduced mounting area :
EXB14AT : About 60 % smaller than the area of an attenuator circuit consisting of three 0603 chip resistors, almost equal to the area of three 0402 chip resistors
EXB24AT : About 50 % smaller than the area of an attenuator circuit consisting of three 1005 chip resistors, almost equal to the area of three 0603 chip resistors
- Mounting cost reduction : (Only 1 chip placed as compared to 3)
- Attenuation : 1 dB to 10 dB
- RoHS compliant

Recommended Applications

- Attenuation / level control / impedance matching of high frequency
(communication signalling equipment cellular phones(GSM, CDMA, PDC, etc.), PHS, PDAs)


■ **As for Packaging Methods, Land Pattern, Soldering Conditions and Safety Precautions,**
Please see Data Files

Explanation of Part Numbers


1	2	3	4	5	6	7	8	9	10	11	12				
E	X	B	1	4	A	T	3	A	R	3	X				
Product Code			Code	Dimensions and Circuit Configuration		Attenuation Value		Tolerance		Packaging					
Thick Film Resistor Network			14AT	0.8 mm × 0.6 mm (inch size : 0302) π type attenuator		One-digit number /one letter shows attenuation value (ex.) 1→1 dB, A→10 dB		R3	±0.3 dB	X Punched Carrier Taping 2 mm pitch, 10,000 pcs.					
			24AT	1.0 mm × 1.0 mm (inch size : 0404) π type attenuator				R5	±0.5 dB						
								Characteristics Impedance							
								A		50 Ω					

Attenuation-Frequency Characteristics



(EXB14AT, EXB24AT)

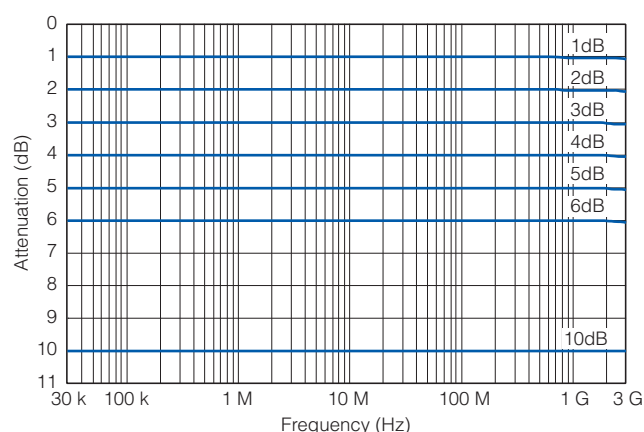



Circuit Configuration

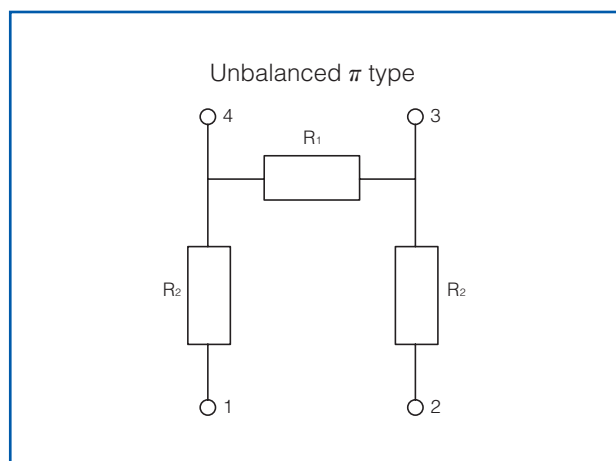

Construction

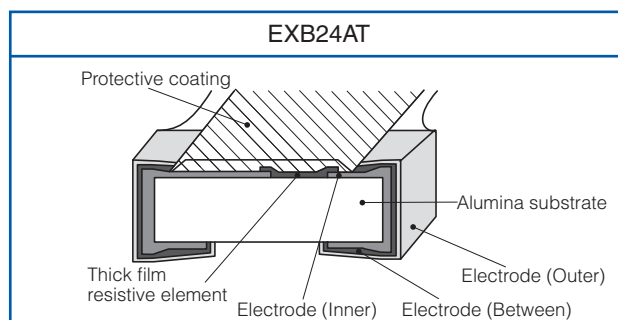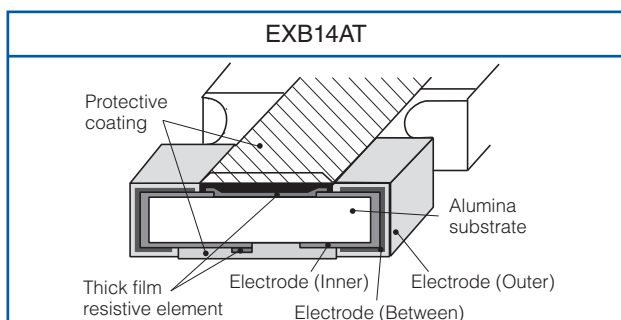

Dimensions in mm (not to scale)

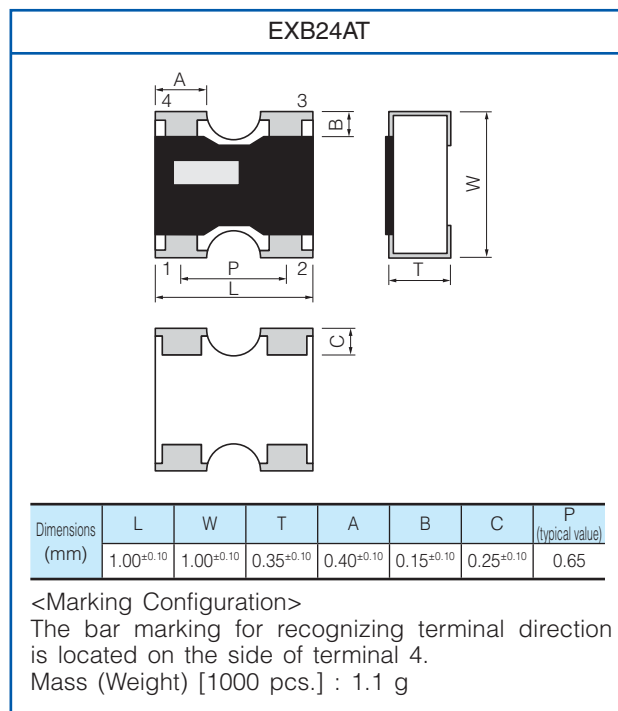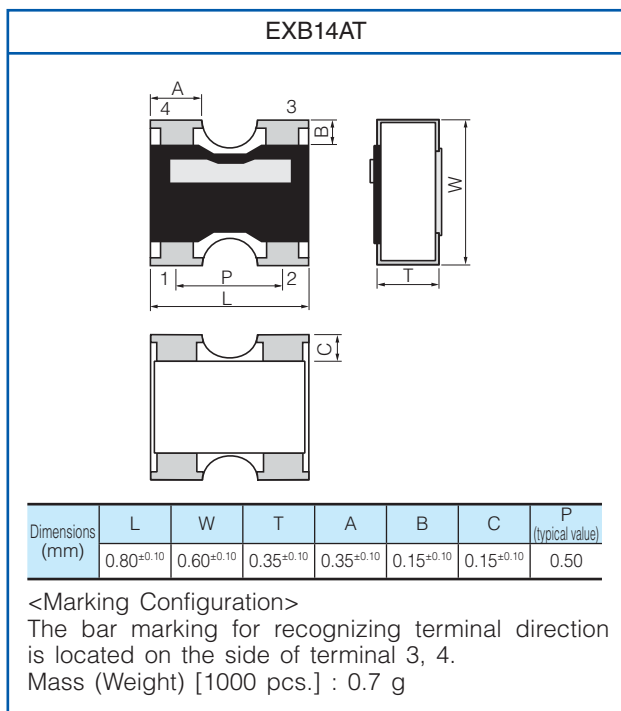


Ratings

Part No.	EXB14AT, EXB24AT
Attenuation Value	1 dB, 2 dB, 3 dB, 4 dB, 5 dB, 6 dB, 10 dB*
Attenuation Value Tolerance	1 dB, 2 dB, 3 dB, 4 dB, 5 dB : ± 0.3 dB 6 dB, 10 dB : ± 0.5 dB
Characteristic Impedance	50 Ω
Power Rating	0.04 W /package
Frequency Range at 70 °C	DC to 3.0 GHz
VSWR (Voltage Standing Wave Ratio)	1.3 max.
Number of Resistors	3 resistors
Number of Terminals	4 terminals
Category Temperature Range	-55 °C to +125 °C

* Please inquire about the other Attenuator value

Power Derating Curve

For resistors operated in ambient temperatures above 70 °C, power rating shall be derated in accordance with the figure on the right.

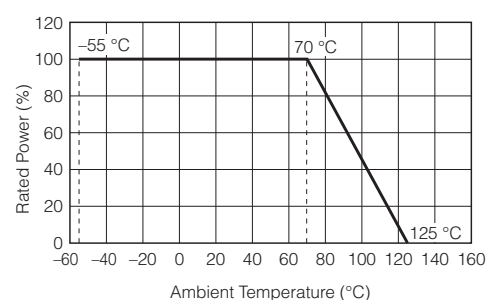

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic:

[EXB-24ATAAR5X](#) [EXB-24AT3AR3X](#) [EXB-24AT6AR5X](#) [EXB-24AT2AR3X](#) [EXB-24AT5AR3X](#) [EXB-24AT1AR3X](#)
[EXB-24AT4AR3X](#) [EXB-24AT0AR3X](#) [EXB-14AT3AR3X](#)