




F1X2WH6

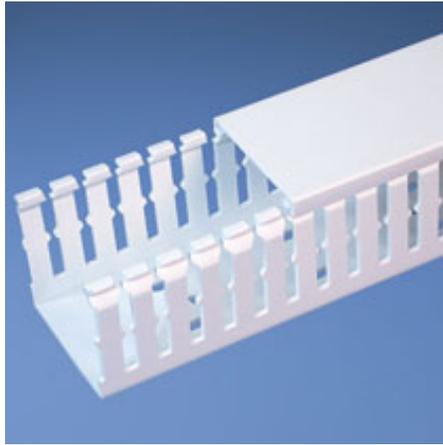


- Choose from 29 sizes of *PANDUIT*® Type F Wiring Duct from 0.5" x 0.5" up to 4.0" x 5.0". Used for general purpose control panel wiring in communication closets. Ideal for use with high-density terminal blocks. The non-slip cover conceals all wiring and is easy to install. The duct and cover form a flush sidewall providing increased capacity and improved aesthetics.
- **Specifications**
 - Made of lead-free PVC
 - UL Recognized continuous use temperature: 122°F (50°C)
 - UL94 Flammability Rating of V-0
 - Conforms with NFPA 79-2002 section 14.3.1 requirement for flame retardant material
 - Available in Light Gray and White
 - Provided with mounting holes
- **Features and Benefits**
 - Narrow finger/slot design allows further fanning of wires for neater wire management in high-density control panels
 - *PANDUIT*® exclusive rounded edges protects hands and wiring/cabling from abrasion
 - Non-slip cover stays in place during shipment, vibration and when in a vertical orientation, eliminating rework
 - Flush cover design holds 10-12% more wires than traditional duct designs
 - Double scoreline allows quick modification for larger cabling bundles saving installation time leading to a lower installed cost
 - Specially formulated lead-free material eliminates health concerns associated with PVC that contains lead
 - Double restricted slot design retains wire in slot for fast, easy wire installation or removal
- Base and cover sold separately.

| | |
|--------------------------|-------------------------------------|
| ■ Part Number | F1X2WH6 |
| ■ RoHS Compliancy Status | Compliant |
| ■ Part Description | Narrow finger, slotted wiring duct. |
| ■ Material | Lead-Free PVC |
| ■ Color | White |
| ■ CSA Certified | Yes |
| ■ Length (ft.) | 6 |
| ■ CE Marking | Yes |
| ■ Duct Size W x H (In.) | 1.26 x 2.12 |
| ■ Duct Size W x H (mm) | 32.0 x 53.8 |
| ■ Mounting Method | Standard Mounting Holes |
| ■ Pricing Description | Slotted Duct,PVC,1"X2"X6',White |
| ■ Slot Width (In.) | 0.20 |
| ■ Slot Width (mm) | 5.0 |

| | |
|-------------------------|-------|
| ▪ Cover Part Number | C1WH6 |
| ▪ Min. Order UOM | FT |
| ▪ Min. Order Qty. | 6 |
| ▪ BOM Qty. (# of Pkgs.) | |

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

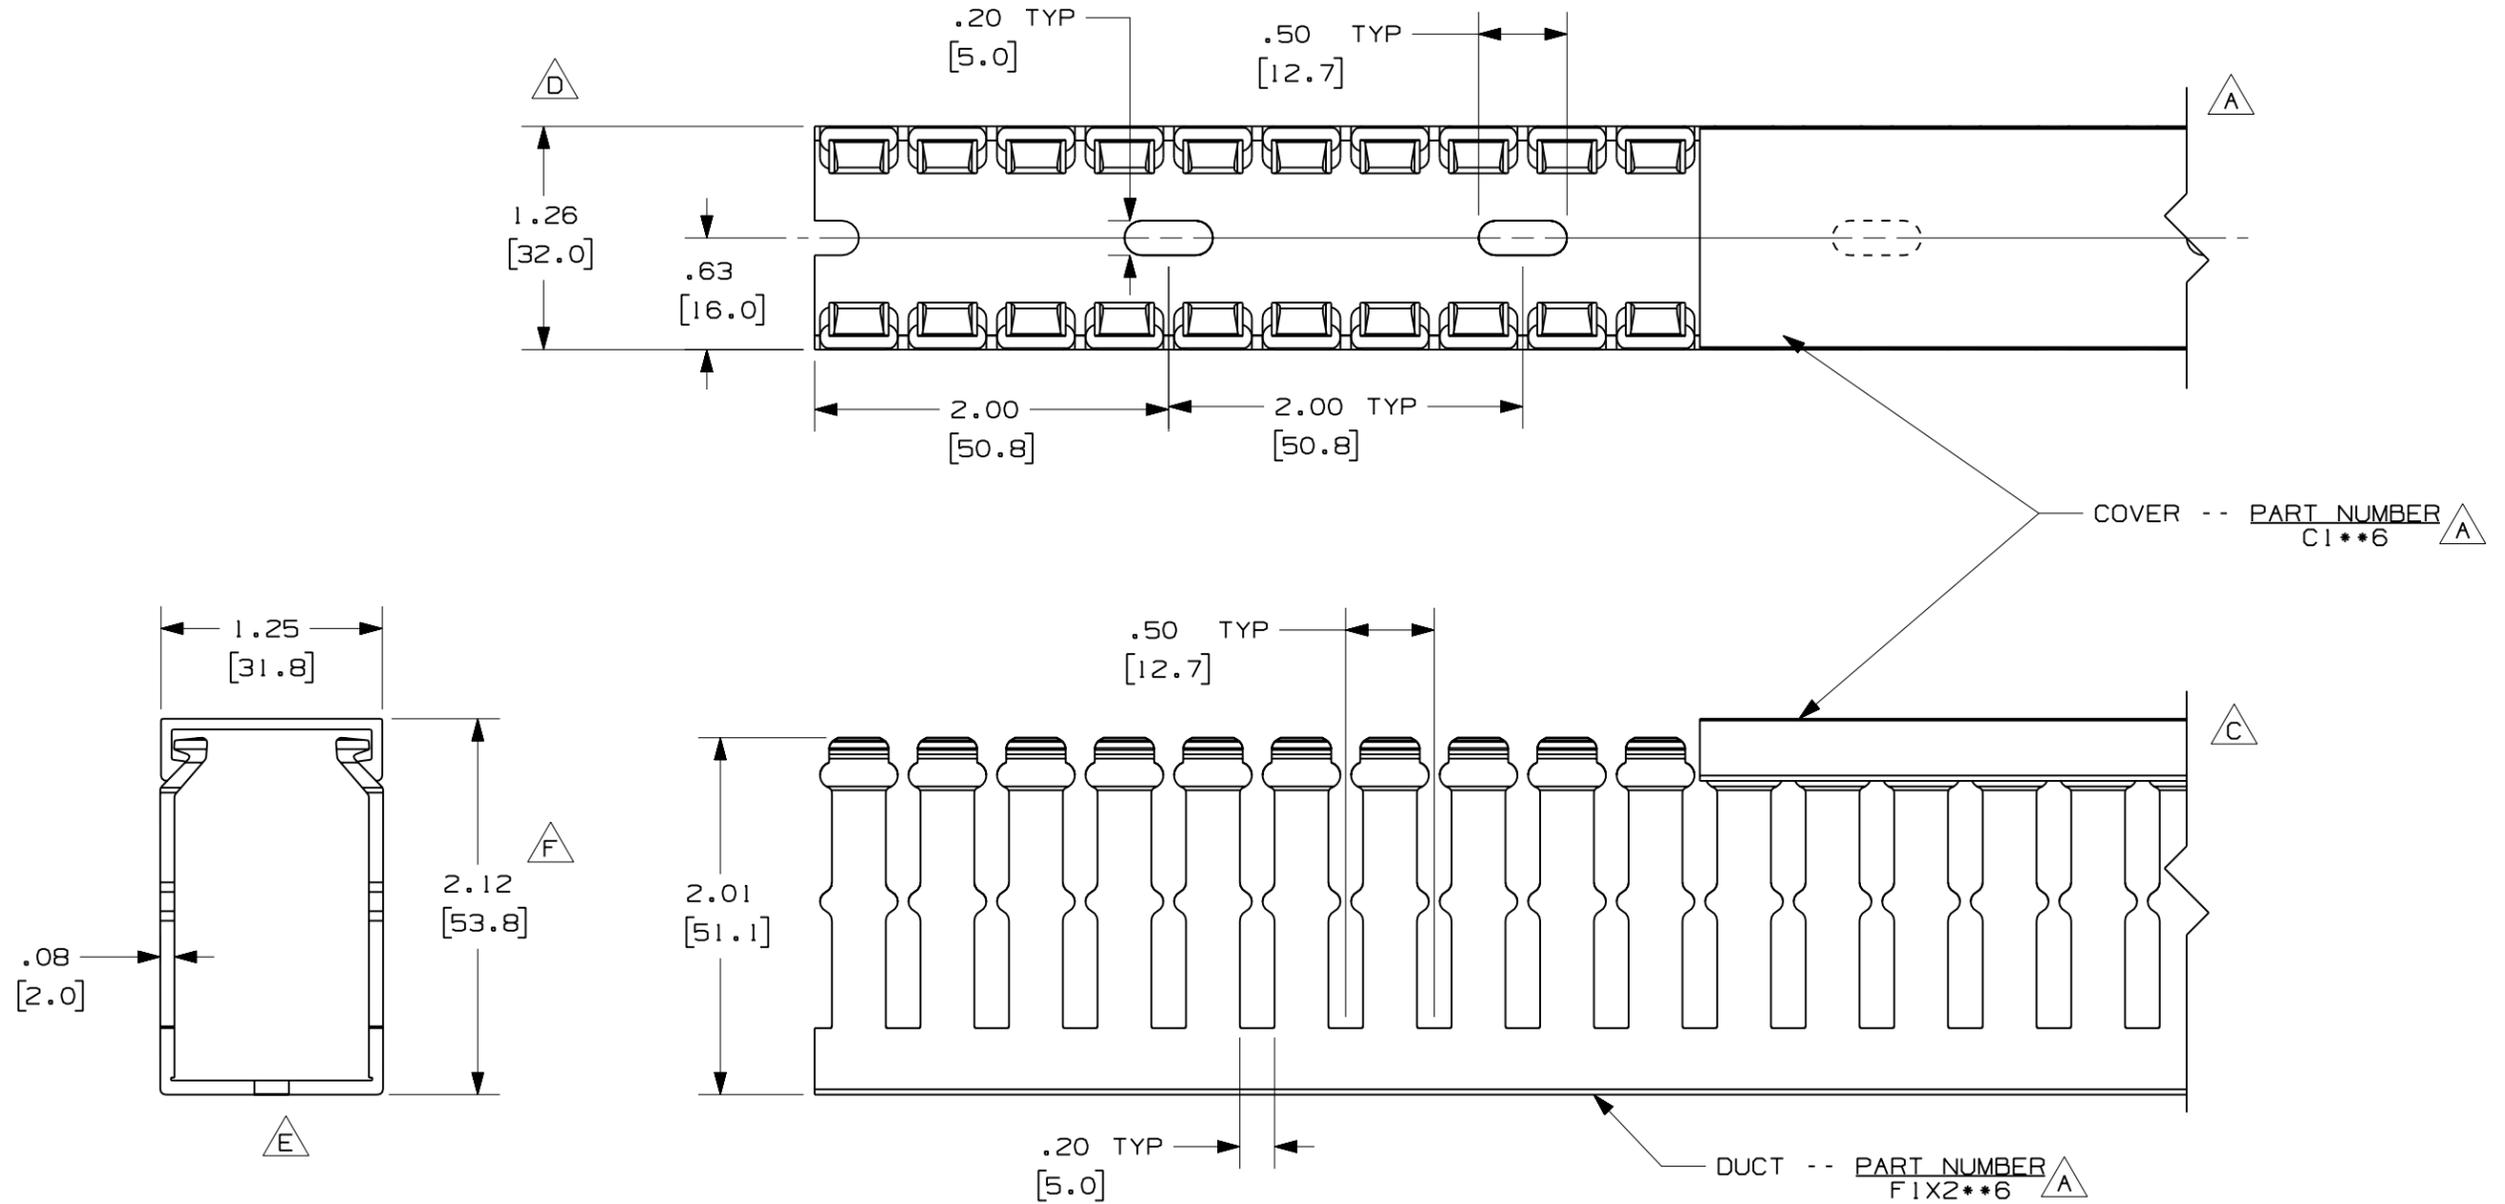

△ △

NOTE.

1. ALL DIMENSIONS ARE REFERENCE ONLY.
2. DIMENSIONS IN PARENTHESES ARE METRIC.
3. THE ** DENOTE COLOR.
4. DUCT AND COVER ARE AVAILABLE IN 6 FT (1828.8) LENGTH

| REV | DATE | BY | CHK | DESCRIPTION |
|-----|---------|------|------|--|
| 2 | 7-23-07 | JCST | MKBE | G. ADDED LENGTH NOTE F. CORRECTED DIMENSION E. REMOVED DIMENSION D. ADDED DIMENSION |
| 1 | 6-25-04 | JCST | MKBE | B. CHANGED DRAWING SIZE C. CHANGED VIEW A. ADDED TOP VIEW, LABELS, AND NOTE |
| R | 1-22-02 | JCST | JGG | DRAWING RELEASED |

| | | | |
|---|-------------------|--------------------------|-----------|
| CAD FILENAME/LAYERS | | D11000BZ_DC/OIC | |
| PANDUIT CORP. TINLEY PARK, ILLINOIS | | | |
| WIRING DUCT - TYPE F WITH COVER 1 X 2 MARKETING DRAWING | | | |
| DRAWN BY JCST | MAT'L: PVC | SCALE FULL | DWG B |
| DATE 1-22-02 | CHECKED BY JGG | DRAWING NO. 36897-675 | SIZE B |

△