



Product Catalog

for professionals

[Products](#) > 97617

97617 – F26TBX/841/A/ECO

GE Ecolux® Biax® T4 - Facilities; Retail Display; Hospitality; Office; Restaurant; Warehouse

High Color Rendering
Energy Savings

Print this Page

Convert to PDF

GENERAL CHARACTERISTICS

Lamp type	Compact Fluorescent - Plug-In
Bulb	T4
Base	GX24q-3
Primary Application	Facilities; Retail Display; Hospitality; Office; Restaurant; Warehouse
Equivalent Wattage (NOM)	100 W
Rated Life (NOM)	17000 hrs
Starting Temperature (MIN)	0 °C(32 °F)
Cathode Resistance (NOM)	3 Ohm
Mercury Content (NOM)	3 mg
Picograms of Mercury (NOM)	115 picograms Hg per mean lumen hour
Rated Life (rapid start) @ Time	17000.0 h @ 3.0 h 20000.0 h @ 12.0 h
Additional Info	Dimmable with appropriate dimming ballast., End of Life Protection (EOL), TCLP compliant
<ul style="list-style-type: none"> Contains Mercury, For more on clean up and safe disposal visit epa.gov/cfl 	

PHOTOMETRIC CHARACTERISTICS


Initial Lumens (NOM)	1800
Mean Lumens (NOM)	1530
Nominal Initial Lumens per Watt (NOM)	69
Color Temperature (NOM)	4100 K
Color Rendering Index (CRI) (NOM)	82

ELECTRICAL CHARACTERISTICS


Wattage (NOM)	26.0
Voltage (NOM)	120.0
Current (max) (NOM)	5.25 A
Open Circuit Voltage (after preheating) (MAX)	265.0 V



Bulb



Base



Package




[View Larger](#)

ADDITIONAL RESOURCES

[Disposal Policies & Recycling Information](#)

GRAPHS & CHARTS

[Graphs_Spectral Power Distribution]

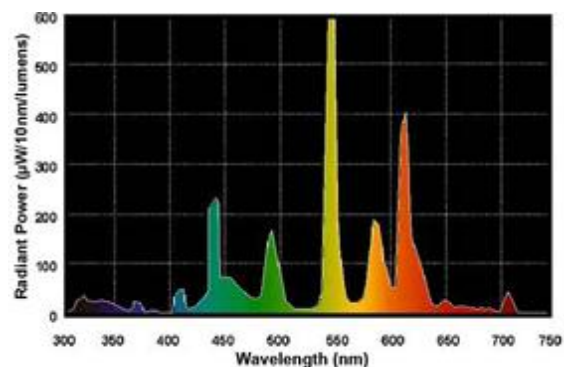

Open Circuit Voltage Across Starter (MIN)	198.0 V
---	---------

Lamp Current (NOM)	0.42 A
-----------------------	--------

Preheat Voltage (MIN)	4.25 V
--------------------------	--------

Supply Current Frequency (NOM)	20 Hz
-----------------------------------	-------

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	5.2000 in (132.0 mm)
--	----------------------

Nominal Length (NOM)	5.2000 in (132.0 mm)
-------------------------	----------------------

Bulb Diameter (DIA) (NOM)	0.4060 in (10.3 mm)
------------------------------	---------------------

PRODUCT INFORMATION

Product Code	97617
--------------	-------

Description	F26TBX/841/A/ECO
-------------	------------------

ANSI Code	60501-IEC-3426-1
-----------	------------------

Standard Package	Case
------------------	------

Standard Package GTIN	10043168976173
--------------------------	----------------

Standard Package Quantity	10
------------------------------	----

Sales Unit	Unit
------------	------

No Of Items Per Sales Unit	1
-------------------------------	---

No Of Items Per Standard Package	10
-------------------------------------	----

UPC	043168976176
-----	--------------

CAUTIONS & WARNINGS

-

[See list of cautions & warnings.](#)

NOTES

- 4-Pin lamp minimum starting temperature is a function of the ballast. Most ballasts are rated with a minimum starting temperature of 50 degrees F (10 C). Ballasts are also available that provide reliable starting to 0 degrees F (-18C) and -20 F (-29C).
- Amalgam product experience stable brightness over a wider temperature range and in various operating positions.
- Based on 60Hz reference circuit.
- Fluorescent lamp lumens decline during life

[Return To Top](#)