

F4-16

Description:

The F4-16 Quick Pack small power transformer offers a significant reduction in size and weight over a standard transformer. This transformer can be used for a wide variety of applications. It is bobbin wound for reduced size and small operating space.


Electrical Specifications (@25C):

Maximum Power: 6.0VA

Input Voltage: 115VAC@50/60Hz

Output Voltage: 16VCT@0.4A

Hipot: 2500VAC primary to secondary; 1500VAC windings to core.

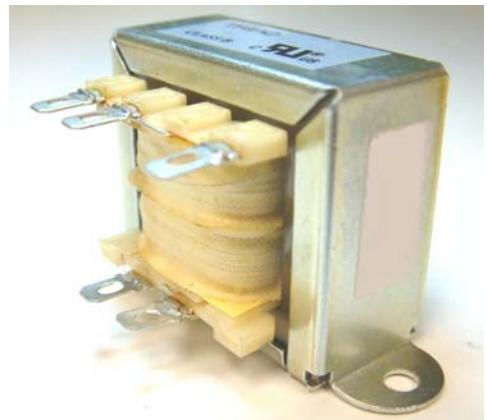

Construction:

Split bobbin non concentric winding eliminates costly electrostatic shielding.

Termination is suitable for quick connects or soldering.

Built with UL Class B Insulation System.

Safety:

UL: File E53148, UL 5085-1 and 2 (formerly UL 506), General Purpose.



Dimensions:


| A | B | C | D | E | F | G |
|-------|---------|-------|-------|-------|----------|------|
| 1.375 | 2.0±.03 | 2.375 | 1.250 | 1.687 | .187 Dia | .687 |

Notes: 1. Units: inches.

2. Terminal size: .187" X 0.021".


3. Weight: .44 lbs

Schematic:



Input: Input 2 & 3

Output: 5 to 8

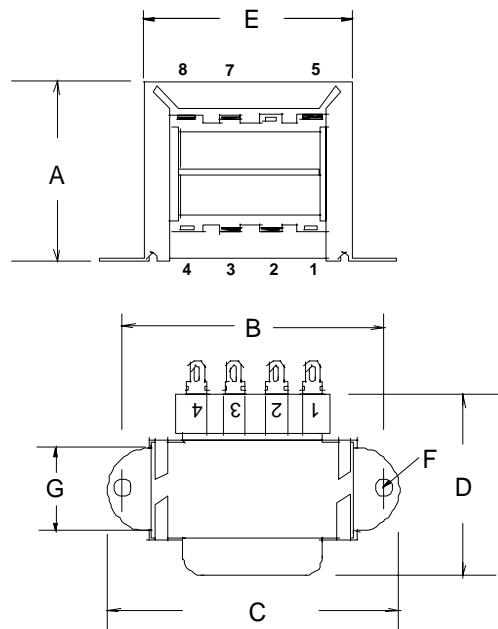

RoHS Compliance: As of manufacturing date February 2005, all standard products meet the requirements of 2011/65/EU, known as the RoHS initiative.

* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.