

F72

Low Profile
Conformal
coated Chip

F75


Maximum CV
Conformal
coated Chip

FRAMELESS™

Upgrade



- Compliant to the RoHS directive (2002/95/EC).

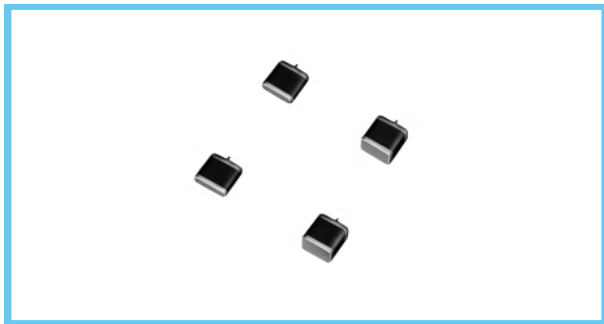


Applications



- Wireless modem
- Tablet PC
- e-book
- SSD
- Smart meter

F72

Type numbering system (Example : 10V 100μF)

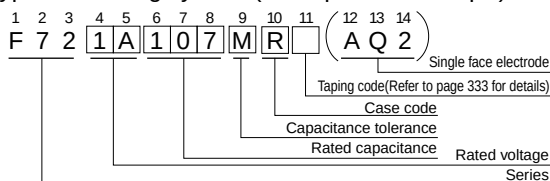

Drawing




Dimensions

Case code	L	W	H	A	B	(D)
R	7.2 ± 0.3	6.0 ± 0.3	1.2 ± 0.3	1.3 ± 0.4	3.8 ± 0.6	(6.2)
M	7.2 ± 0.3	6.0 ± 0.3	2.0 MAX.	1.3 ± 0.4	3.8 ± 0.6	(6.2)



D dimension only for reference

F75

Type numbering system (Example : 16V 150μF)

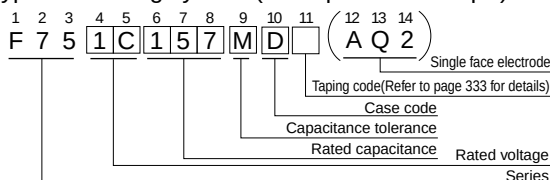

Drawing





Standard Ratings

F72	Cap.(μF)	Code	V	4	6.3	10	16
				0G	0J	1A	1C
	33	336					R
	47	476				R	R
	68	686			R	R	R
	100	107	R	R	R		
	150	157	R	R	R		
	220	227	R	R	R		
	330	337	R	R	(R)		
	470	477				M	
	680	687				M	
	1000	108			M	M	
	1500	158			M		

() The series in parentheses are being developed. Please contact to your local Nichicon sales office when these series are being designed in your application.

Specifications

Item	Performance Characteristics
Category	-55 to +125°C (Rated temperature : +85°C)
Temperature Range	
Capacitance Tolerance	±20%, ±10% (at 120Hz)
Dissipation Factor (120Hz)	Refer to next page
ESR (100kHz)	Refer to next page
Leakage Current	• After 1 minute's application of rated voltage, leakage current at 20°C is not more than 0.01CV or 0.5μA, whichever is greater. • After 1 minute's application of rated voltage, leakage current at 85°C is not more than 0.1CV or 5μA, whichever is greater. • After 1 minute's application of derated voltage, leakage current at 125°C is not more than 0.125CV or 6.3μA, whichever is greater.
Capacitance Change by Temperature	+15% Max. (at +125°C) +10% Max. (at +85°C) -10% Max. (at -55°C)
Damp Heat (Steady State)	At 40°C, 90 to 95% R.H., For 500 hours (No voltage applied) Capacitance Change Refer to * 1 Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less
Temperature Cycles	At -55°C / +125°C, 30 minutes each, For 5 cycles, Capacitance Change Refer to * 1 Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less
Resistance to Soldering Heat	10 seconds reflow at 260°C, 10 seconds immersion at 260°C Capacitance Change Refer to * 1 Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less
Surge*	After application of surge in series with a 33Ω resistor at the rate of 30 seconds ON, 30 seconds OFF, for 1000 successive test cycles at 85°C, capacitors shall meet the characteristic requirements table below. Capacitance Change Refer to * 1 Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less
Endurance*	After 2000 hours' application of rated voltage at 85°C, capacitors shall meet the characteristic requirements table below. Capacitance Change Refer to * 1 Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less
Shear Test	After applying the pressure load of 5N for 10±1 seconds horizontally to the center of capacitor side body which has no electrode and has been soldered beforehand on a substrate, there shall be found neither exfoliation nor its sign at the terminal electrode. 
Terminal Strength	Keeping a capacitor surface-mounted on a substrate upside down and supporting the substrate at both of the opposite bottom points 45mm apart from the center of capacitor, the pressure strength is applied with a specified jig at the center of substrate so that the substrate may bend by 1mm as illustrated. Then, there shall be found no remarkable abnormality on the capacitor terminals. 

* As for the surge voltage, refer to page 332 for details.

Dimensions

Case code	L	W	H	A	B	(D)
U	7.1 ± 0.3	3.2 ± 0.3	2.0 MAX.	1.3 ± 0.3	3.6 ± 0.6	(6.0)
C	7.1 ± 0.3	3.2 ± 0.3	2.5 ± 0.3	1.3 ± 0.3	3.6 ± 0.6	(6.0)
D	7.3 ± 0.3	4.3 ± 0.3	2.8 ± 0.3	1.3 ± 0.4	3.9 ± 0.6	(6.4)
R	7.2 ± 0.3	6.0 ± 0.3	3.5 ± 0.3	1.3 ± 0.4	3.8 ± 0.6	(6.2)

D dimension only for reference

F75	Cap.(μF)	Code	V	4	6.3	10	16
				0G	0J	1A	1C
	68	686					C
	100	107					C
	150	157				C	D
	220	227			C	C · D	R
	330	337	C	C · D	D		
	470	477	C · D	U · D	U · R		
	680	687	D	(U) · D · R			
	1000	108	D · R	(U) · R			
	1500	158	R				
	2200	228	R				

F72

■ Standard Ratings

Rated Volt	Rated Capacitance (μF)	Case code	Part Number	Leakage Current (μA)	Dissipation Factor (%@120Hz)	ESR (Ω@100kHz)	*1 ΔC/C (%)
4V	100	R	F720G107MRC	4.0	8	0.70	*
	150	R	F720G157MRC	6.0	10	0.70	*
	220	R	F720G227MRC	8.8	12	0.70	*
	330	R	F720G337MRC	13.2	12	0.70	*
6.3V	68	R	F720J686MRC	4.3	6	0.75	*
	100	R	F720J107MRC	6.3	8	0.70	*
	150	R	F720J157MRC	9.5	10	0.70	*
	220	R	F720J227MRC	13.9	12	0.70	*
	330	R	F720J337MRC	20.8	12	0.70	*
	1000	M	F720J108MMC	63.0	30	0.14	±15
	1500	M	F720J158MMC	95.0	45	0.14	±20
10V	47	R	F721A476MRC	4.7	6	0.80	*
	68	R	F721A686MRC	6.8	6	0.75	*
	100	R	F721A107MRC	10.0	8	0.70	*
	150	R	F721A157MRC	15.0	10	0.70	*
	220	R	F721A227MRC	22.0	12	0.70	*
	470	M	F721A477MMC	47.0	30	0.14	±15
	680	M	F721A687MMC	68.0	35	0.14	±20
	1000	M	F721A108MMC	200	45	0.14	±20
16V	33	R	F721C336MRC	5.3	6	0.90	*
	47	R	F721C476MRC	7.5	6	0.80	*
	68	R	F721C686MRC	10.9	6	0.75	*

1 : ΔC/C Marked ""

	F72 ALL Case (%)
Damp Heat	±10
Temperature cycles	±5
Resistance soldering heat	±5
Surge	±5
Endurance	±10

F75

■ Standard Ratings

Rated Volt	Rated Capacitance (μF)	Case code	Part Number	Leakage Current (μA)	Dissipation Factor (%@120Hz)	ESR (Ω@100kHz)	*1 ΔC/C (%)
4V	330	C	F750G337MCC	13.2	10	0.15	*
	470	C	F750G477MCC	18.8	14	0.12	*
	470	D	F750G477MDC	18.8	14	0.12	*
	680	D	F750G687MDC	27.2	18	0.12	*
	1000	D	F750G108MDC	40.0	24	0.12	*
	1000	R	F750G108MRC	40.0	24	0.12	*
	1500	R	F750G158MRC	60.0	30	0.12	*
	2200	R	F750G228MRC	88.0	45	0.07	*
6.3V	220	C	F750J227MCC	13.9	10	0.20	*
	330	C	F750J337MCC	20.8	10	0.15	*
	330	D	F750J337MDC	20.8	10	0.15	*
	470	U	F750J477MUC	29.6	15	0.10	*
	470	D	F750J477MDC	29.6	14	0.12	*
	680	D	F750J687MDC	42.8	18	0.12	*
	680	R	F750J687MRC	42.8	18	0.12	*
	1000	R	F750J108MRC	63.0	24	0.12	*
10V	150	C	F751A157MCC	15.0	10	0.22	*
	220	C	F751A227MCC	22.0	10	0.20	*
	220	D	F751A227MDC	22.0	10	0.20	*
	330	D	F751A337MDC	33.0	10	0.15	*
	470	U	F751A477MUC	94.0	30	0.15	±20
	470	R	F751A477MRC	47.0	14	0.12	*
16V	68	C	F751C686MCC	10.9	10	0.22	*
	100	C	F751C107MCC	16.0	10	0.22	*
	150	D	F751C157MDC	24.0	10	0.22	*
	220	R	F751C227MRC	35.2	10	0.20	*

1 : ΔC/C Marked ""

	F75 ALL Case (%)
Damp Heat	±10
Temperature cycles	±5
Resistance soldering heat	±5
Surge	±5
Endurance	±10

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Nichicon:

[F720G107KRC](#) [F720G107MRC](#) [F720G157KRC](#) [F720G157MRC](#) [F720G227KRC](#) [F720G227MRC](#) [F720G337KRC](#)
[F720G337MRC](#) [F720J107KRC](#) [F720J107MRC](#) [F720J157KRC](#) [F720J157MRC](#) [F720J227KRC](#) [F720J227MRC](#)
[F720J337KRC](#) [F720J337MRC](#) [F720J686KRC](#) [F720J686MRC](#) [F721A107KRC](#) [F721A107MRC](#) [F721A157KRC](#)
[F721A157MRC](#) [F721A227KRC](#) [F721A227MRC](#) [F721A476KRC](#) [F721A476MRC](#) [F721A686KRC](#) [F721A686MRC](#)
[F721C336KRC](#) [F721C336MRC](#) [F721C476KRC](#) [F721C476MRC](#) [F721C686KRC](#) [F721C686MRC](#) [F750G108KDC](#)
[F750G108KRC](#) [F750G108MDC](#) [F750G108MRC](#) [F750G158KRC](#) [F750G158MRC](#) [F750G228KRC](#) [F750G228MRC](#)
[F750G337KCC](#) [F750G337MCC](#) [F750G477KCC](#) [F750G477KDC](#) [F750G477MCC](#) [F750G477MDC](#) [F750G687KDC](#)
[F750G687MDC](#) [F750J108KRC](#) [F750J108MRC](#) [F750J227KCC](#) [F750J227MCC](#) [F750J337KCC](#) [F750J337KDC](#)
[F750J337MCC](#) [F750J337MDC](#) [F750J477KDC](#) [F750J477MDC](#) [F750J687KDC](#) [F750J687KRC](#) [F750J687MDC](#)
[F750J687MRC](#) [F751A157KCC](#) [F751A157MCC](#) [F751A227KCC](#) [F751A227KDC](#) [F751A227MCC](#) [F751A227MDC](#)
[F751A337KDC](#) [F751A337MDC](#) [F751A477KRC](#) [F751A477MRC](#) [F751C107KCC](#) [F751C107MCC](#) [F751C157KDC](#)
[F751C157MDC](#) [F751C227KRC](#) [F751C227MRC](#) [F751C686KCC](#) [F751C686MCC](#) [F721A108MMC](#) [F721A687MMC](#)
[F721A477MMC](#) [F720J108MMC](#) [F720J158KMC](#) [F720J158MMC](#) [F750J477KUC](#) [F750J477MUC](#)