

**F95**Conformal coated  
Chip

FRAMELESS™




For SMD




Smaller

For High  
Frequency


- Compliant to the RoHS directive (2002/95/EC).

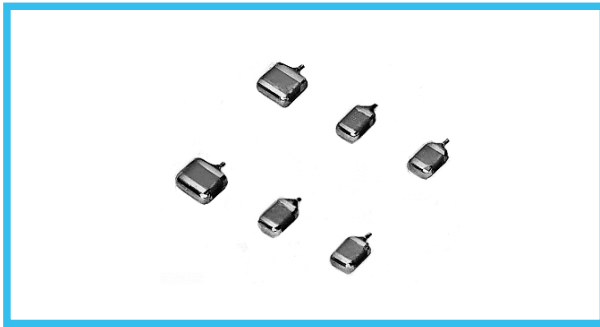

### Type numbering system (Example : 35V 1.5μF)

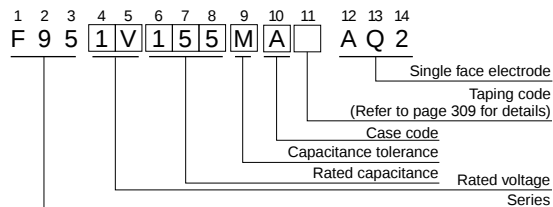

### Drawing

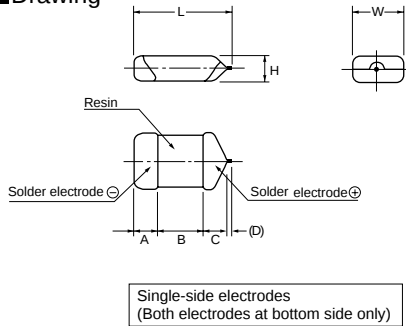

### Dimensions

| Case code | L         | W          | H         | A         | B         | C         | (D)   |
|-----------|-----------|------------|-----------|-----------|-----------|-----------|-------|
| R         | 2.2 ± 0.3 | 1.25 ± 0.3 | 0.65MAX.  | 0.6 ± 0.3 | 0.8 ± 0.3 | 0.5MIN    | (0.2) |
| P         | 2.2 ± 0.3 | 1.25 ± 0.3 | 1.0 ± 0.2 | 0.6 ± 0.3 | 0.8 ± 0.3 | 0.8 ± 0.3 | (0.2) |
| Q         | 3.2 ± 0.2 | 1.6 ± 0.2  | 0.8 ± 0.2 | 0.8 ± 0.2 | 1.2 ± 0.2 | 0.8 ± 0.2 | (0.2) |
| S         | 3.2 ± 0.3 | 1.6 ± 0.3  | 1.0 ± 0.2 | 0.8 ± 0.3 | 1.2 ± 0.3 | 0.8 ± 0.3 | (0.2) |
| A         | 3.2 ± 0.3 | 1.7 ± 0.3  | 1.4 ± 0.2 | 0.8 ± 0.3 | 1.2 ± 0.3 | 0.8 ± 0.3 | (0.2) |
| T         | 3.5 ± 0.2 | 2.7 ± 0.2  | 1.0 ± 0.2 | 0.8 ± 0.2 | 1.2 ± 0.2 | 1.1 ± 0.2 | (0.2) |
| B         | 3.3 ± 0.3 | 2.7 ± 0.3  | 1.8 ± 0.2 | 0.8 ± 0.3 | 1.2 ± 0.3 | 1.1 ± 0.3 | (0.2) |

D dimension only for reference

### Standard Ratings

| Cap.<br>(μF) | V   | 4                       | 6.3                   | 10                        | 16                | 20          | 25            | 35            |
|--------------|-----|-------------------------|-----------------------|---------------------------|-------------------|-------------|---------------|---------------|
|              |     | 0G                      | 0J                    | 1A                        | 1C                | 1D          | 1E            | 1V            |
| 1            | 105 |                         |                       |                           | P                 |             | R · P · S     | P · S · A     |
| 1.5          | 155 |                         |                       |                           | P                 |             | S             | A             |
| 2.2          | 225 |                         |                       |                           | P                 | P · S       | R · P · S · A | (S) · A       |
| 3.3          | 335 |                         |                       | P                         | P                 | A           | A             | (S) · (A) · B |
| 4.7          | 475 |                         |                       | P                         | R · P             | S · A       | P · Q · S · A |               |
| 6.8          | 685 |                         |                       | P                         |                   | Q · A       | (Q) · (S)     |               |
| 10           | 106 |                         | P                     | R · P                     | P · Q · S · A     | (S) · A · B | A · (T) · B   |               |
| 15           | 156 | P                       | P                     | P                         | S · A             |             |               |               |
| 22           | 226 | P                       | R · P                 | P · Q · S · A             | Q · S · A · T · B | B           |               |               |
| 33           | 336 | P                       | (R) · P · Q · S · A   | P · Q · S · A             | (A) · (T) · B     |             |               |               |
| 47           | 476 | (R) · P · Q · S · A     | P · Q · S · A         | (P) · (Q) · S · A · T · B | B                 |             |               |               |
| 68           | 686 | S · A                   | P · S · A             | B                         |                   |             |               |               |
| 100          | 107 | P · Q · S · A           | P · Q · S · A · T · B | A · T · B                 |                   |             |               |               |
| 150          | 157 | P · B                   | B                     |                           |                   |             |               |               |
| 220          | 227 | (P) · Q · S · A · T · B | (A) · (T) · B         |                           |                   |             |               |               |
| 330          | 337 | (S) · A · T · B         | B                     |                           |                   |             |               |               |
| 470          | 477 | (T) · B                 |                       |                           |                   |             |               |               |

( ) The series in parentheses are being developed.

Please contact to your local Nichicon sales office when these series are being designed in your application.

( ) The series in parentheses are being developed.

Please contact to your local Nichicon sales office when these series are being designed in your application.

### Specifications

| Item                              | Performance Characteristics                                                                                                                                                                                                                                                                                                                                                                                                         |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Category                          | ~55 to +125°C (Rated temperature : 85°C)                                                                                                                                                                                                                                                                                                                                                                                            |
| Temperature Range                 |                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Capacitance Tolerance             | ±20%, ±10% (at 120Hz) (However P Case ±20%)                                                                                                                                                                                                                                                                                                                                                                                         |
| Dissipation Factor (at 120Hz)     | Refer to next page                                                                                                                                                                                                                                                                                                                                                                                                                  |
| ESR(100kHz)                       | Refer to next page                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Leakage Current                   | Refer to next page<br>Provided that<br>• After 1 minute's application of rated voltage, leakage current at 85°C, 10 times or less than 20°C specified value.<br>• After 1 minute's application of rated voltage, leakage current at 125°C, 12.5 times or less than 20°C specified value.                                                                                                                                            |
| Capacitance Change by Temperature | +15% Max. (at +125°C)<br>+10% Max. (at +85°C)<br>-10% Max. (at -55°C)                                                                                                                                                                                                                                                                                                                                                               |
| Damp Heat (Steady State)          | At 40°C, 90 to 95% R.H., For 500 hours (No voltage applied)<br>Capacitance Change ..... Refer to next page (* 1)<br>Dissipation Factor ..... Initial specified value or less<br>Leakage Current ..... Initial specified value or less                                                                                                                                                                                               |
| Temperature Cycles                | At -55°C / +125°C, 30 minutes each, For 5 cycles,<br>Capacitance Change ..... Refer to next page (* 1)<br>Dissipation Factor ..... Initial specified value or less<br>Leakage Current ..... Initial specified value or less                                                                                                                                                                                                         |
| Resistance to Soldering Heat      | Dipping Flow at 260°C for 10 seconds, reflow at 260°C for 10 seconds<br>Capacitance Change ..... Refer to next page (* 1)<br>Dissipation Factor ..... Initial specified value or less<br>Leakage Current ..... Initial specified value or less                                                                                                                                                                                      |
| Surge*                            | After application of surge voltage in series with a 33Ω resistor at the rate of 30 seconds ON, 30 seconds OFF, for 1000 successive test cycles at 85°C, capacitors meet the characteristics requirements listed below.<br>Capacitance Change ..... Refer to next page (* 1)<br>Dissipation Factor ..... Initial specified value or less<br>Leakage Current ..... Initial specified value or less                                    |
| Endurance*                        | After 2000 hours' application of rated voltage at 85°C, or derated voltage at 125°C, capacitors meet the characteristic requirements listed below.<br>Capacitance Change ..... Refer to next page (* 1)<br>Dissipation Factor ..... Initial specified value or less<br>Leakage Current ..... Initial specified value or less                                                                                                        |
| Shear Test                        | After applying the pressure load of 5N for 10 ± 1 seconds horizontally to the center of capacitor side body which has no electrode and has been soldered beforehand on an aluminum substrate, there shall be found neither exfoliation nor its sign at the terminal electrode.<br><br>5N (0.51kg · f)<br>For 10 ± 1 seconds                                                                                                         |
| Terminal Strength                 | Keeping a capacitor surface-mounted on a substrate upside down and supporting the substrate at both of the opposite bottom points 45mm apart from the center of the capacitor, the pressure strength is applied with a specified jig at the center of the substrate so that the substrate may bend by 1mm as illustrated. Then, there shall be found no remarkable abnormality on the capacitor terminals.<br><br>R230<br>45 45 1mm |

\* As for the surge and derated voltage at 125°C, refer to page 308 for details.

## F95

## ■ Standard Ratings

| Rated Volt | Rated Capacitance (μF) | Case code | Part Number    | *2 Leakage Current (μA) | Dissipation Factor (%@120Hz) | ESR (Ω@100kHz) | *1 ΔC/C (%) |
|------------|------------------------|-----------|----------------|-------------------------|------------------------------|----------------|-------------|
| 4V         | 15                     | P         | F950G156MPAAQ2 | 0.6                     | 10                           | 1.8            | *           |
|            | 22                     | P         | F950G226MPAAQ2 | 0.9                     | 14                           | 1.1            | *           |
|            | 33                     | P         | F950G336MPAAQ2 | 1.3                     | 14                           | 1.1            | *           |
|            | 47                     | P         | F950G476MPAAQ2 | 1.9                     | 14                           | 1.1            | *           |
|            | 47                     | Q         | F950G476MQAAQ2 | 1.9                     | 10                           | 1.1            | *           |
|            | 47                     | S         | F950G476MSAAQ2 | 1.9                     | 10                           | 0.8            | *           |
|            | 47                     | A         | F950G476MAAAQ2 | 1.9                     | 8                            | 0.6            | *           |
|            | 68                     | S         | F950G686MSAAQ2 | 2.7                     | 10                           | 0.8            | *           |
|            | 68                     | A         | F950G686MAAAQ2 | 2.7                     | 10                           | 0.5            | *           |
|            | 100                    | P         | F950G107MPAAQ2 | 4.0                     | 30                           | 1.2            | ±15         |
|            | 100                    | Q         | F950G107MQAAQ2 | 4.0                     | 25                           | 1.0            | ±15         |
|            | 100                    | S         | F950G107MSAAQ2 | 4.0                     | 14                           | 0.8            | *           |
|            | 100                    | A         | F950G107MAAAQ2 | 4.0                     | 12                           | 0.5            | *           |
|            | 150                    | P         | F950G157MPAAQ2 | 12.0                    | 31                           | 1.1            | ±20         |
|            | 150                    | B         | F950G157MBAAQ2 | 6.0                     | 14                           | 0.4            | *           |
|            | 220                    | Q         | F950G227MQAAQ2 | 8.8                     | 30                           | 1.5            | ±20         |
|            | 220                    | S         | F950G227MSAAQ2 | 8.8                     | 30                           | 0.8            | ±15         |
|            | 220                    | A         | F950G227MAAAQ2 | 8.8                     | 25                           | 0.8            | ±15         |
|            | 220                    | T         | F950G227MTAAQ2 | 8.8                     | 25                           | 0.6            | *           |
|            | 220                    | B         | F950G227MBAAQ2 | 8.8                     | 16                           | 0.4            | *           |
|            | 330                    | A         | F950G337MAAAQ2 | 13.2                    | 40                           | 0.8            | ±20         |
|            | 330                    | T         | F950G337MTAAQ2 | 13.2                    | 40                           | 0.8            | ±20         |
|            | 330                    | B         | F950G337MBAAQ2 | 13.2                    | 30                           | 0.6            | ±15         |
|            | 470                    | B         | F950G477MBAAQ2 | 18.8                    | 40                           | 0.4            | ±20         |
| 6.3V       | 10                     | P         | F950J106MPAAQ2 | 0.6                     | 8                            | 2.0            | *           |
|            | 15                     | P         | F950J156MPAAQ2 | 0.9                     | 10                           | 1.8            | *           |
|            | 22                     | R         | F950J226MRAAQ2 | 1.4                     | 20                           | 2.0            | ±20         |
|            | 22                     | P         | F950J226MPAAQ2 | 1.4                     | 14                           | 1.1            | *           |
|            | 33                     | P         | F950J336MPAAQ2 | 2.1                     | 14                           | 1.1            | *           |
|            | 33                     | Q         | F950J336MQAAQ2 | 2.1                     | 10                           | 2.0            | *           |
|            | 33                     | S         | F950J336MSAAQ2 | 2.1                     | 10                           | 1.0            | *           |
|            | 33                     | A         | F950J336MAAAQ2 | 2.1                     | 8                            | 0.8            | *           |
|            | 47                     | P         | F950J476MPAAQ2 | 3.0                     | 20                           | 1.1            | ±15         |
|            | 47                     | Q         | F950J476MQAAQ2 | 3.0                     | 10                           | 1.1            | *           |
|            | 47                     | S         | F950J476MSAAQ2 | 3.0                     | 10                           | 0.9            | *           |
|            | 47                     | A         | F950J476MAAAQ2 | 3.0                     | 10                           | 0.6            | *           |
|            | 68                     | P         | F950J686MPAAQ2 | 4.3                     | 25                           | 1.2            | ±15         |
|            | 68                     | S         | F950J686MSAAQ2 | 4.3                     | 14                           | 0.9            | *           |
|            | 68                     | A         | F950J686MAAAQ2 | 4.3                     | 12                           | 0.5            | *           |
|            | 100                    | P         | F950J107MPAAQ2 | 12.6                    | 35                           | 1.2            | ±20         |
|            | 100                    | Q         | F950J107MQAAQ2 | 6.3                     | 30                           | 1.1            | ±20         |
|            | 100                    | S         | F950J107MSAAQ2 | 6.3                     | 20                           | 0.9            | ±15         |
|            | 100                    | A         | F950J107MAAAQ2 | 6.3                     | 14                           | 0.5            | *           |
|            | 100                    | T         | F950J107MTAAQ2 | 6.3                     | 14                           | 0.6            | *           |
|            | 100                    | B         | F950J107MBAAQ2 | 6.3                     | 14                           | 0.4            | *           |
|            | 150                    | B         | F950J157MBAAQ2 | 9.5                     | 18                           | 0.4            | *           |
|            | 220                    | B         | F950J227MBAAQ2 | 13.9                    | 30                           | 0.4            | *           |
|            | 330                    | B         | F950J337MBAAQ2 | 20.8                    | 35                           | 0.6            | ±20         |
| 10V        | 3.3                    | P         | F951A335MPAAQ2 | 0.5                     | 8                            | 5.0            | *           |
|            | 4.7                    | P         | F951A475MPAAQ2 | 0.5                     | 8                            | 4.0            | *           |
|            | 6.8                    | P         | F951A685MPAAQ2 | 0.7                     | 8                            | 4.0            | *           |
|            | 10                     | R         | F951A106MRAAQ2 | 1.0                     | 18                           | 3.0            | ±20         |
|            | 10                     | P         | F951A106MPAAQ2 | 1.0                     | 8                            | 3.0            | *           |
|            | 15                     | P         | F951A156MPAAQ2 | 1.5                     | 10                           | 3.0            | *           |
|            | 22                     | P         | F951A226MPAAQ2 | 2.2                     | 14                           | 3.0            | *           |
|            | 22                     | Q         | F951A226MQAAQ2 | 2.2                     | 10                           | 2.0            | *           |
|            | 22                     | S         | F951A226MSAAQ2 | 2.2                     | 10                           | 1.1            | *           |
|            | 22                     | A         | F951A226MAAAQ2 | 2.2                     | 6                            | 0.9            | *           |
|            | 33                     | P         | F951A336MPAAQ2 | 3.3                     | 20                           | 3.0            | ±15         |
|            | 33                     | Q         | F951A336MQAAQ2 | 3.3                     | 18                           | 3.0            | ±15         |
|            | 33                     | S         | F951A336MSAAQ2 | 3.3                     | 10                           | 1.1            | *           |
|            | 33                     | A         | F951A336MAAAQ2 | 3.3                     | 10                           | 0.8            | *           |
|            | 47                     | S         | F951A476MSAAQ2 | 4.7                     | 14                           | 1.1            | ±15         |
|            | 47                     | A         | F951A476MAAAQ2 | 4.7                     | 10                           | 0.8            | *           |
|            | 47                     | T         | F951A476MTAAQ2 | 4.7                     | 12                           | 0.8            | *           |
|            | 47                     | B         | F951A476MBAAQ2 | 4.7                     | 8                            | 0.4            | *           |

| Rated Volt | Rated Capacitance (μF) | Case code | Part Number    | *2 Leakage Current (μA) | Dissipation Factor (%@120Hz) | ESR (Ω@100kHz) | *1 ΔC/C (%) |
|------------|------------------------|-----------|----------------|-------------------------|------------------------------|----------------|-------------|
| 10V        | 68                     | B         | F951A686MBAAQ2 | 6.8                     | 12                           | 0.4            | *           |
|            | 100                    | A         | F951A107MAAAQ2 | 10.0                    | 35                           | 1.0            | ±15         |
|            | 100                    | T         | F951A107MTAAQ2 | 10.0                    | 20                           | 0.6            | ±15         |
|            | 100                    | B         | F951A107MBAAQ2 | 10.0                    | 14                           | 0.4            | *           |
|            |                        |           |                |                         |                              |                |             |
| 16V        | 1                      | P         | F951C105MPAAQ2 | 0.5                     | 8                            | 8.0            | *           |
|            | 1.5                    | P         | F951C155MPAAQ2 | 0.5                     | 8                            | 8.0            | *           |
|            | 2.2                    | P         | F951C225MPAAQ2 | 0.5                     | 8                            | 6.0            | *           |
|            | 3.3                    | P         | F951C335MPAAQ2 | 0.5                     | 8                            | 6.0            | *           |
|            | 4.7                    | R         | F951C475MRAAQ2 | 0.8                     | 12                           | 6.0            | ±20         |
|            | 4.7                    | P         | F951C475MPAAQ2 | 0.8                     | 10                           | 4.0            | *           |
|            | 10                     | P         | F951C106MPAAQ2 | 1.6                     | 10                           | 4.0            | *           |
|            | 10                     | Q         | F951C106MQAAQ2 | 1.6                     | 8                            | 3.0            | *           |
|            | 10                     | S         | F951C106MSAAQ2 | 1.6                     | 8                            | 2.0            | *           |
|            | 10                     | A         | F951C106MAAAQ2 | 1.6                     | 6                            | 1.4            | *           |
|            | 15                     | S         | F951C156MSAAQ2 | 2.4                     | 8                            | 2.0            | *           |
|            | 15                     | A         | F951C156MAAAQ2 | 2.4                     | 8                            | 1.4            | *           |
|            | 22                     | Q         | F951C226MQAAQ2 | 3.5                     | 12                           | 3.0            | *           |
|            | 22                     | S         | F951C226MSAAQ2 | 3.5                     | 10                           | 2.0            | ±15         |
|            | 22                     | A         | F951C226MAAAQ2 | 3.5                     | 8                            | 1.4            | *           |
|            | 22                     | T         | F951C226MTAAQ2 | 3.5                     | 8                            | 1.4            | *           |
|            | 22                     | B         | F951C226MBAAQ2 | 3.5                     | 6                            | 0.5            | *           |
|            | 33                     | B         | F951C336MBAAQ2 | 5.3                     | 8                            | 0.5            | *           |
|            | 47                     | B         | F951C476MBAAQ2 | 7.5                     | 10                           | 0.6            | *           |
|            |                        |           |                |                         |                              |                |             |
| 20V        | 2.2                    | P         | F951D225MPAAQ2 | 0.5                     | 6                            | 6.0            | *           |
|            | 2.2                    | S         | F951D225MSAAQ2 | 0.5                     | 6                            | 5.0            | *           |
|            | 3.3                    | A         | F951D335MAAAQ2 | 0.7                     | 6                            | 2.0            | *           |
|            | 4.7                    | S         | F951D475MSAAQ2 | 0.9                     | 8                            | 4.0            | *           |
|            | 4.7                    | A         | F951D475MAAAQ2 | 0.9                     | 6                            | 1.5            | *           |
|            | 6.8                    | Q         | F951D685MQAAQ2 | 1.4                     | 10                           | 4.0            | *           |
|            | 6.8                    | A         | F951D685MAAAQ2 | 1.4                     | 8                            | 1.5            | *           |
|            | 10                     | A         | F951D106MAAAQ2 | 2.0                     | 8                            | 1.5            | *           |
|            | 10                     | B         | F951D106MBAAQ2 | 2.0                     | 6                            | 0.8            | *           |
|            | 22                     | B         | F951D226MBAAQ2 | 4.4                     | 8                            | 0.8            | *           |
| 25V        | 1                      | R         | F951E105MRAAQ2 | 0.5                     | 10                           | 10.0           | ±10         |
|            | 1                      | P         | F951E105MPAAQ2 | 0.5                     | 6                            | 8.0            | *           |
|            | 1                      | S         | F951E105MSAAQ2 | 0.5                     | 6                            | 8.0            | *           |
|            | 1.5                    | S         | F951E155MSAAQ2 | 0.5                     | 6                            | 7.0            | *           |
|            | 2.2                    | R         | F951E225MRAAQ2 | 0.6                     | 15                           | 15.0           | ±20         |
|            | 2.2                    | P         | F951E225MPAAQ2 | 0.6                     | 8                            | 6.0            | ±15         |
|            | 2.2                    | S         | F951E225MSAAQ2 | 0.6                     | 6                            | 7.0            | *           |
|            | 2.2                    | A         | F951E225MAAAQ2 | 0.6                     | 6                            | 3.2            | *           |
|            | 3.3                    | A         | F951E335MAAAQ2 | 0.8                     | 6                            | 2.8            | *           |
|            | 4.7                    | P         | F951E475MPAAQ2 | 1.2                     | 10                           | 8.0            | ±15         |
|            | 4.7                    | Q         | F951E475MQAAQ2 | 1.2                     | 10                           | 4.0            | ±15         |
|            | 4.7                    | S         | F951E475MSAAQ2 | 1.2                     | 8                            | 4.0            | *           |
|            | 4.7                    | A         | F951E475MAAAQ2 | 1.2                     | 8                            | 2.0            | *           |
|            | 10                     | A         | F951E106MAAAQ2 | 2.5                     | 12                           | 2.0            | ±15         |
|            | 10                     | B         | F951E106MBAAQ2 | 2.5                     | 6                            | 0.9            | *           |
| 35V        | 1                      | P         | F951V105MPAAQ2 | 0.5                     | 8                            | 10.0           | ±10         |
|            | 1                      | S         | F951V105MSAAQ2 | 0.5                     | 6                            | 8.0            | *           |
|            | 1                      | A         | F951V105MAAAQ2 | 0.5                     | 4                            | 4.4            | *           |
|            | 1.5                    | A         | F951V155MAAAQ2 | 0.5                     | 6                            | 4.4            | *           |
|            | 2.2                    | A         | F951V225MAAAQ2 | 0.8                     | 6                            | 4.4            | *           |
|            | 3.3                    | B         | F951V335MBAAQ2 | 1.2                     | 6                            | 1.6            | *           |
|            | 4.7                    | B         | F951V475MBAAQ2 | 1.7                     | 6                            | 1.6            | *           |

\* In case of capacitance tolerance ±10% type, [K] will be put at 9th digit of type numbering system.

\*1 : ΔC/C

| Item                      | P · Q · S · A · T · B Case (%) |
|---------------------------|--------------------------------|
| Damp Heat                 | ±10                            |
| Temperature cycles        | ±5                             |
| Resistance soldering heat | ±5                             |
| Surge                     | ±5                             |
| Endurance                 | ±10                            |

\*2 : Leakage Current

After 1 minute's application of rated voltage, leakage current at 20°C.

CAT.8100Y