
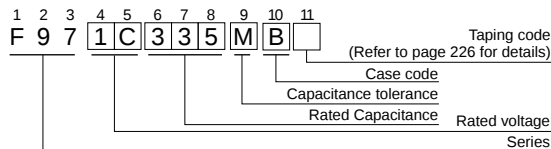


F97Resin-molded Chip,
High Reliability
(High temperature /
moisture resistance) Series

■ Specifications

■ Type numbering system (Example : 16V 3.3 μ F)


■ Drawing

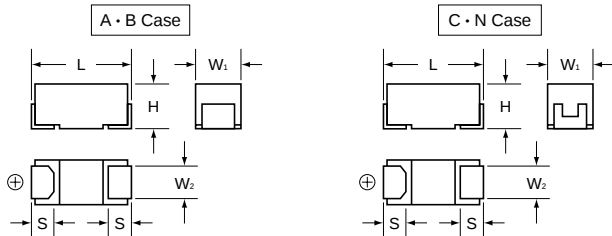

■ Dimensions

Case code	L	W ₁	W ₂	H	S
A	3.2 ± 0.2	1.6 ± 0.2	1.2 ± 0.1	1.6 ± 0.2	0.8 ± 0.2
B	3.5 ± 0.2	2.8 ± 0.2	2.2 ± 0.1	1.9 ± 0.2	0.8 ± 0.2
C	6.0 ± 0.2	3.2 ± 0.2	2.2 ± 0.1	2.5 ± 0.2	1.3 ± 0.2
N	7.3 ± 0.2	4.3 ± 0.2	2.4 ± 0.1	2.8 ± 0.2	1.3 ± 0.2

■ Marking

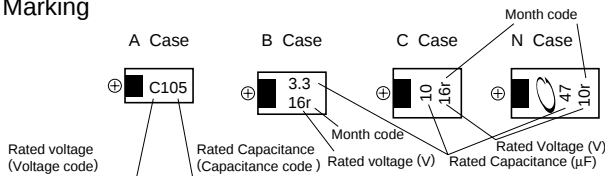

■ Standard ratings

Cap. (μ F)	V	4	6.3	10	16	20	25	35
Code	0G	0J	1A	1C	1D	1E	1V	
0.1	104							A* ¹
0.15	154							A* ¹
0.22	224							A* ¹
0.33	334							A
0.47	474						A	A · B* ¹
0.68	684					A	A	A · B* ¹
1	105				A	A	A	B
1.5	155			A	A	A	B	B · C* ¹
2.2	225		A	A	A	B	B	B · C* ¹
3.3	335	A	A	A	B	B	B	C
4.7	475	A	A	B	B	B	C	C · N* ¹
6.8	685	A	B	B	B	C	C	N
10	106	B	B	B	C	C	C · N	N
15	156	B	B	C	C	N	N	
22	226	B	C	C	C · N	N		
33	336	C	C	C · N	N			
47	476	C	C · N	N				
68	686	C · N	N					
100	107	N	N					
150	157	N						

Item	Performance Characteristics
Category Temperature Range	-55 ~ +125°C (Rated temperature : 85°C.)
Capacitance Tolerance	±20%, ±10% (at 120Hz)
Dissipation Factor	Refer to P.233
E.S.R. (100kHz)	Refer to P.233
Leakage Current*	- After 1 minute's application of rated voltage,leakage current at 20°C is not more than 0.01CV or 0.5μA, whichever is greater. - After 1 minute's application of rated voltage,leakage current at 85°C is not more than 0.1CV or 5μA, whichever is greater. - After 1 minute's application of derated voltage,leakage current at 125°C is not more than 0.125CV or 6.3μA, whichever is greater.
Capacitance Change by Temperature	+15% Max. (at +125°C) +10% Max. (at +85°C) -10% Max. (at -55°C)
Damp Heat	At 85°C, 85% R.H., For 1000 hours (No voltage applied) Capacitance Change Within ±10% of initial value Dissipation Factor Initial specified value or less Leakage Current 125% or less of initial specified value
Load Humidity	After 500 hour's application of rated voltage in series with a 33 Ω resistor at 60°C, 90~95% R.H., capacitors meet the characteristics requirements listed below. Capacitance Change Within ±10% of initial value Dissipation Factor Initial specified value or less Leakage Current 125% or less of initial specified value
Temperature Cycles	At -55°C / +125°C, For 30 minutes each, 1000 cycles Capacitance Change Within ±5% of initial value Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less
Resistance to Soldering Heat	At 260°C, reflowing capacitors for 10 seconds Max. Capacitance Change Within ±5% of initial value Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less
Solderability	After immersing capacitors completely into a solder pot at 245°C for 2~3 seconds, more than 3/4 of their electrode area shall remain covered with new solder.
Surge*	After application of surge in series with a 33 Ω resistor at the rate of 30 seconds ON, 30 seconds OFF, for 1000 successive test cycles at 85°C, capacitors meet the characteristics requirements listed below. Capacitance Change Within ±5% of initial value Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less
Endurance*	After 2000 hours' application of rated voltage in series with a 3 Ω resistor at 85°C, or derated voltage in series with a 3 Ω resistor at 125°C, capacitors meet the characteristic requirements listed below. Capacitance Change Within ±10% of initial value Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less
Shear Test	After Applying the pressure load of 5N for 10 ± 1 seconds horizontally to the center of capacitor side body which has no electrode and has been soldered beforehand on an aluminum substrate, there shall be found neither exfoliation nor its sign at the terminal electrode. 5N (0.51kg · f) For 10 ± 1 seconds
Terminal Strength	Keeping a capacitor surface-mounted on a substrate upside down and supporting the substrate at both of the opposite bottom points 45mm apart from the center of the capacitor, the pressure strength is applied with a specified jig at the center of the substrate so that the substrate may bend by 1mm as illustrated. 20N 45mm 1mm Then, there shall be found no remarkable abnormality on the capacitor terminals.

* As for the surge and derated voltage at 125°C, refer to page 225 for details.

*¹ is old series. Please choice another series for new design.

F97

■ Standard ratings

Rated Volt	Rated Capacitance (μF)	Case code	Part Number	Leakage Current (μA)	Dissipation Factor (%@120Hz)	E.S.R. (Ω@100kHz)
4V	3.3	A	F970G335MAA	0.5	6	4.5
	4.7	A	F970G475MAA	0.5	6	4.0
	6.8	A	F970G685MAA	0.5	6	3.5
	10	B	F970G106MBA	0.5	6	2.1
	15	B	F970G156MBA	0.6	6	2.0
	22	B	F970G226MBA	0.9	6	1.9
	33	C	F970G336MCC	1.3	6	1.1
	47	C	F970G476MCC	1.9	6	0.9
	68	C	F970G686MCC	2.7	6	0.8
	68	N	F970G686MNC	2.7	6	0.6
	100	N	F970G107MNC	4.0	8	0.6
6.3V	150	N	F970G157MNC	6.0	8	0.6
	2.2	A	F970J225MAA	0.5	6	5.0
	3.3	A	F970J335MAA	0.5	6	4.5
	4.7	A	F970J475MAA	0.5	6	4.0
	6.8	B	F970J685MBA	0.5	6	2.5
	10	B	F970J106MBA	0.6	6	2.1
	15	B	F970J156MBA	0.9	6	2.0
	22	C	F970J226MCC	1.4	6	1.1
	33	C	F970J336MCC	2.1	6	1.1
	47	C	F970J476MCC	3.0	6	0.9
	47	N	F970J476MNC	3.0	6	0.7
10V	68	N	F970J686MNC	4.3	6	0.6
	100	N	F970J107MNC	6.3	8	0.6
	1.5	A	F971A155MAA	0.5	4	6.0
	2.2	A	F971A225MAA	0.5	6	5.0
	3.3	A	F971A335MAA	0.5	6	4.5
	4.7	B	F971A475MBA	0.5	6	2.8
	6.8	B	F971A685MBA	0.7	6	2.5
	10	B	F971A106MBA	1.0	6	2.0
	15	C	F971A156MCC	1.5	6	1.2
	22	C	F971A226MCC	2.2	6	1.1
	33	C	F971A336MCC	3.3	6	1.1
16V	33	N	F971A336MNC	3.3	6	0.7
	47	N	F971A476MNC	4.7	6	0.7
	1	A	F971C105MAA	0.5	4	7.5
	1.5	A	F971C155MAA	0.5	4	6.3
	2.2	A	F971C225MAA	0.5	6	5.0
	3.3	B	F971C335MBA	0.5	6	3.1
	4.7	B	F971C475MBA	0.8	6	2.8
	6.8	B	F971C685MBA	1.1	6	2.5
	10	C	F971C106MCC	1.6	6	1.5
	15	C	F971C156MCC	2.4	6	1.2
	22	C	F971C226MCC	3.5	8	1.1
20V	22	N	F971C226MNC	3.5	6	0.7
	33	N	F971C336MNC	5.3	6	0.7
	0.68	A	F971D684MAA	0.5	4	7.6
	1	A	F971D105MAA	0.5	4	7.5
	1.5	A	F971D155MAA	0.5	6	6.7
	2.2	B	F971D225MBA	0.5	6	3.8
	3.3	B	F971D335MBA	0.7	6	3.1
	4.7	B	F971D475MBA	0.9	6	2.8
	6.8	C	F971D685MCC	1.4	6	1.8
	10	C	F971D106MCC	2.0	6	1.5
	15	N	F971D156MNC	3.0	6	0.7
	22	N	F971D226MNC	4.4	6	0.7

Rated Volt	Rated Capacitance (μF)	Case code	Part Number	Leakage Current (μA)	Dissipation Factor (%@120Hz)	E.S.R. (Ω@100kHz)
25V	0.47	A	F971E474MAA	0.5	4	10.0
	0.68	A	F971E684MAA	0.5	4	7.6
	1	A	F971E105MAA	0.5	4	7.5
	1.5	B	F971E155MBA	0.5	4	4.0
	2.2	B	F971E225MBA	0.6	6	3.8
	3.3	B	F971E335MBA	0.8	6	3.5
	4.7	C	F971E475MCC	1.2	6	1.8
	6.8	C	F971E685MCC	1.7	6	1.8
	10	C	F971E106MCC	2.5	6	1.6
	10	N	F971E106MNC	2.5	6	1.0
	15	N	F971E156MNC	3.8	6	0.7
35V	0.1	A	F971V104MAA ^{*1}	0.5	4	15.0
	0.15	A	F971V154MAA ^{*1}	0.5	4	15.0
	0.22	A	F971V224MAA ^{*1}	0.5	4	12.0
	0.33	A	F971V334MAA	0.5	4	12.0
	0.47	A	F971V474MAA	0.5	4	10.0
	0.47	B	F971V474MBA ^{*1}	0.5	4	5.0
	0.68	A	F971V684MAA	0.5	4	7.6
	0.68	B	F971V684MBA ^{*1}	0.5	4	5.0
	1	B	F971V105MBA	0.5	4	4.0
	1.5	B	F971V155MBA	0.5	6	4.0
	1.5	C	F971V155MCC ^{*1}	0.5	4	2.0
	2.2	B	F971V225MBA	0.8	6	3.8
	2.2	C	F971V225MCC ^{*1}	0.8	6	2.0
	3.3	C	F971V335MCC	1.2	6	2.0
	4.7	C	F971V475MCC	1.6	6	1.8
	4.7	N	F971V475MNC ^{*1}	1.6	6	1.0
	6.8	N	F971V685MNC	2.4	6	1.0
	10	N	F971V106MNC	3.5	6	1.0

*1 is old series. Please choice another series for new design.