


# PDF Technical File

Visitors to this web site are authorized to download this information for reprints or electronic transfer to their technical reference files.

## flat cable clamp


WITH ADHESIVE MOUNT. Ferrite assembly bonded in nylon mounting clamp; easily installed by peeling protective paper strip from base and pressing into place. Two sizes accommodate all flat cables up to 40-conductor width.

Very effective from 100 MHz to 1 GHz; peak attenuation at 700 MHz. See pages 36 and 37 for impedance curve characteristics.



PART No.	w/o Adhesive	A	B	C	D	E	IMPEDANCE IN OHMS
FA25B0121	FC25B0121	.520 13,2	1.790 45,5	.750 19,1	.060 1,5	1.010 25,7	245 @ 700 MHz
FA25B2480	FC25B2480	.800 20,3	3.180 80,8	1.125 28,6	.060 1,5	2.047 52,0	790 @ 700 MHz

For specific performance by part number, find the alpha-numeric designation on the charts below according to the last seven digits of each catalog part number; i.e., for part number "CS28B1937" see "28B1937" on the chart.

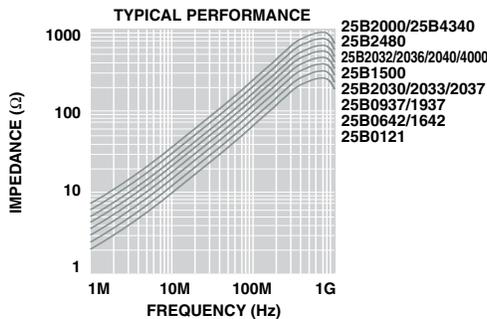

For further technical information, please contact us at:

**FerriShield<sup>®</sup>**, INC.  
 Interference Control Components

Mulberry Professional Plaza • 426 Mulberry Street \* Suite 300 • Scranton, PA 18503  
 Tel: 570.961.5617 • Fax: 570.969.6274 • e-mail: info@ferrishield.com

[www.ferrishield.com](http://www.ferrishield.com)

ISO 9001:2000 registered

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[LeaderTech:](#)

[FA25B0121](#) [FC25B0121](#) [FC25B2480](#) [FA25B2480](#)