


DETAILS

Product Number	FC13976_ANGELINA-RZ-W
Family	ANGELINA
Type	RefPack
Color	metal
Diameter	82 mm
Height	31 mm
Style	round
Optic Material	PC
Holder Material	
Fastening	screw, socket
Status	production ready
ROHS Compliant	Yes
Date Updated	13/03/2015



OPTICAL PROPERTIES


LED	Viewing Angle	Light Beam	Effi- ciency	cd/lm	Connector
LUXEON K12	54 deg	Wide	89 %	1.000	TE: 2213134-2 + OPTIC CLIP Z50 TYPE1 2213194-1
LUXEON K16	54 deg	Wide	89 %	0.900	TE: 2213134-2 + OPTIC CLIP Z50 TYPE1 2213194-1
COB J-Type	48 deg	Wide	87 %	0.930	IDEAL: 50-2103NC + 50-2100AN
PrevaLED Core Z4 LES19	55 deg	Wide	88 %	0.870	TE: OPTIC CLIP Z50 TYPE1 2213194-1
Fortimo SLM G5 LES 15 Standard	57 deg	Wide	87 %	0.840	TE: OPTIC CLIP Z50 TYPE1 2213194-1
AC Zhaga COB	64 deg	Wide	89 %	0.780	Optosource: SEHSMJD-A
Mega Zenigata (GW6DME)	55 deg	Wide	89 %	0.890	TE: 2213130-2 + OPTIC CLIP Z50 TYPE1 2213194-1

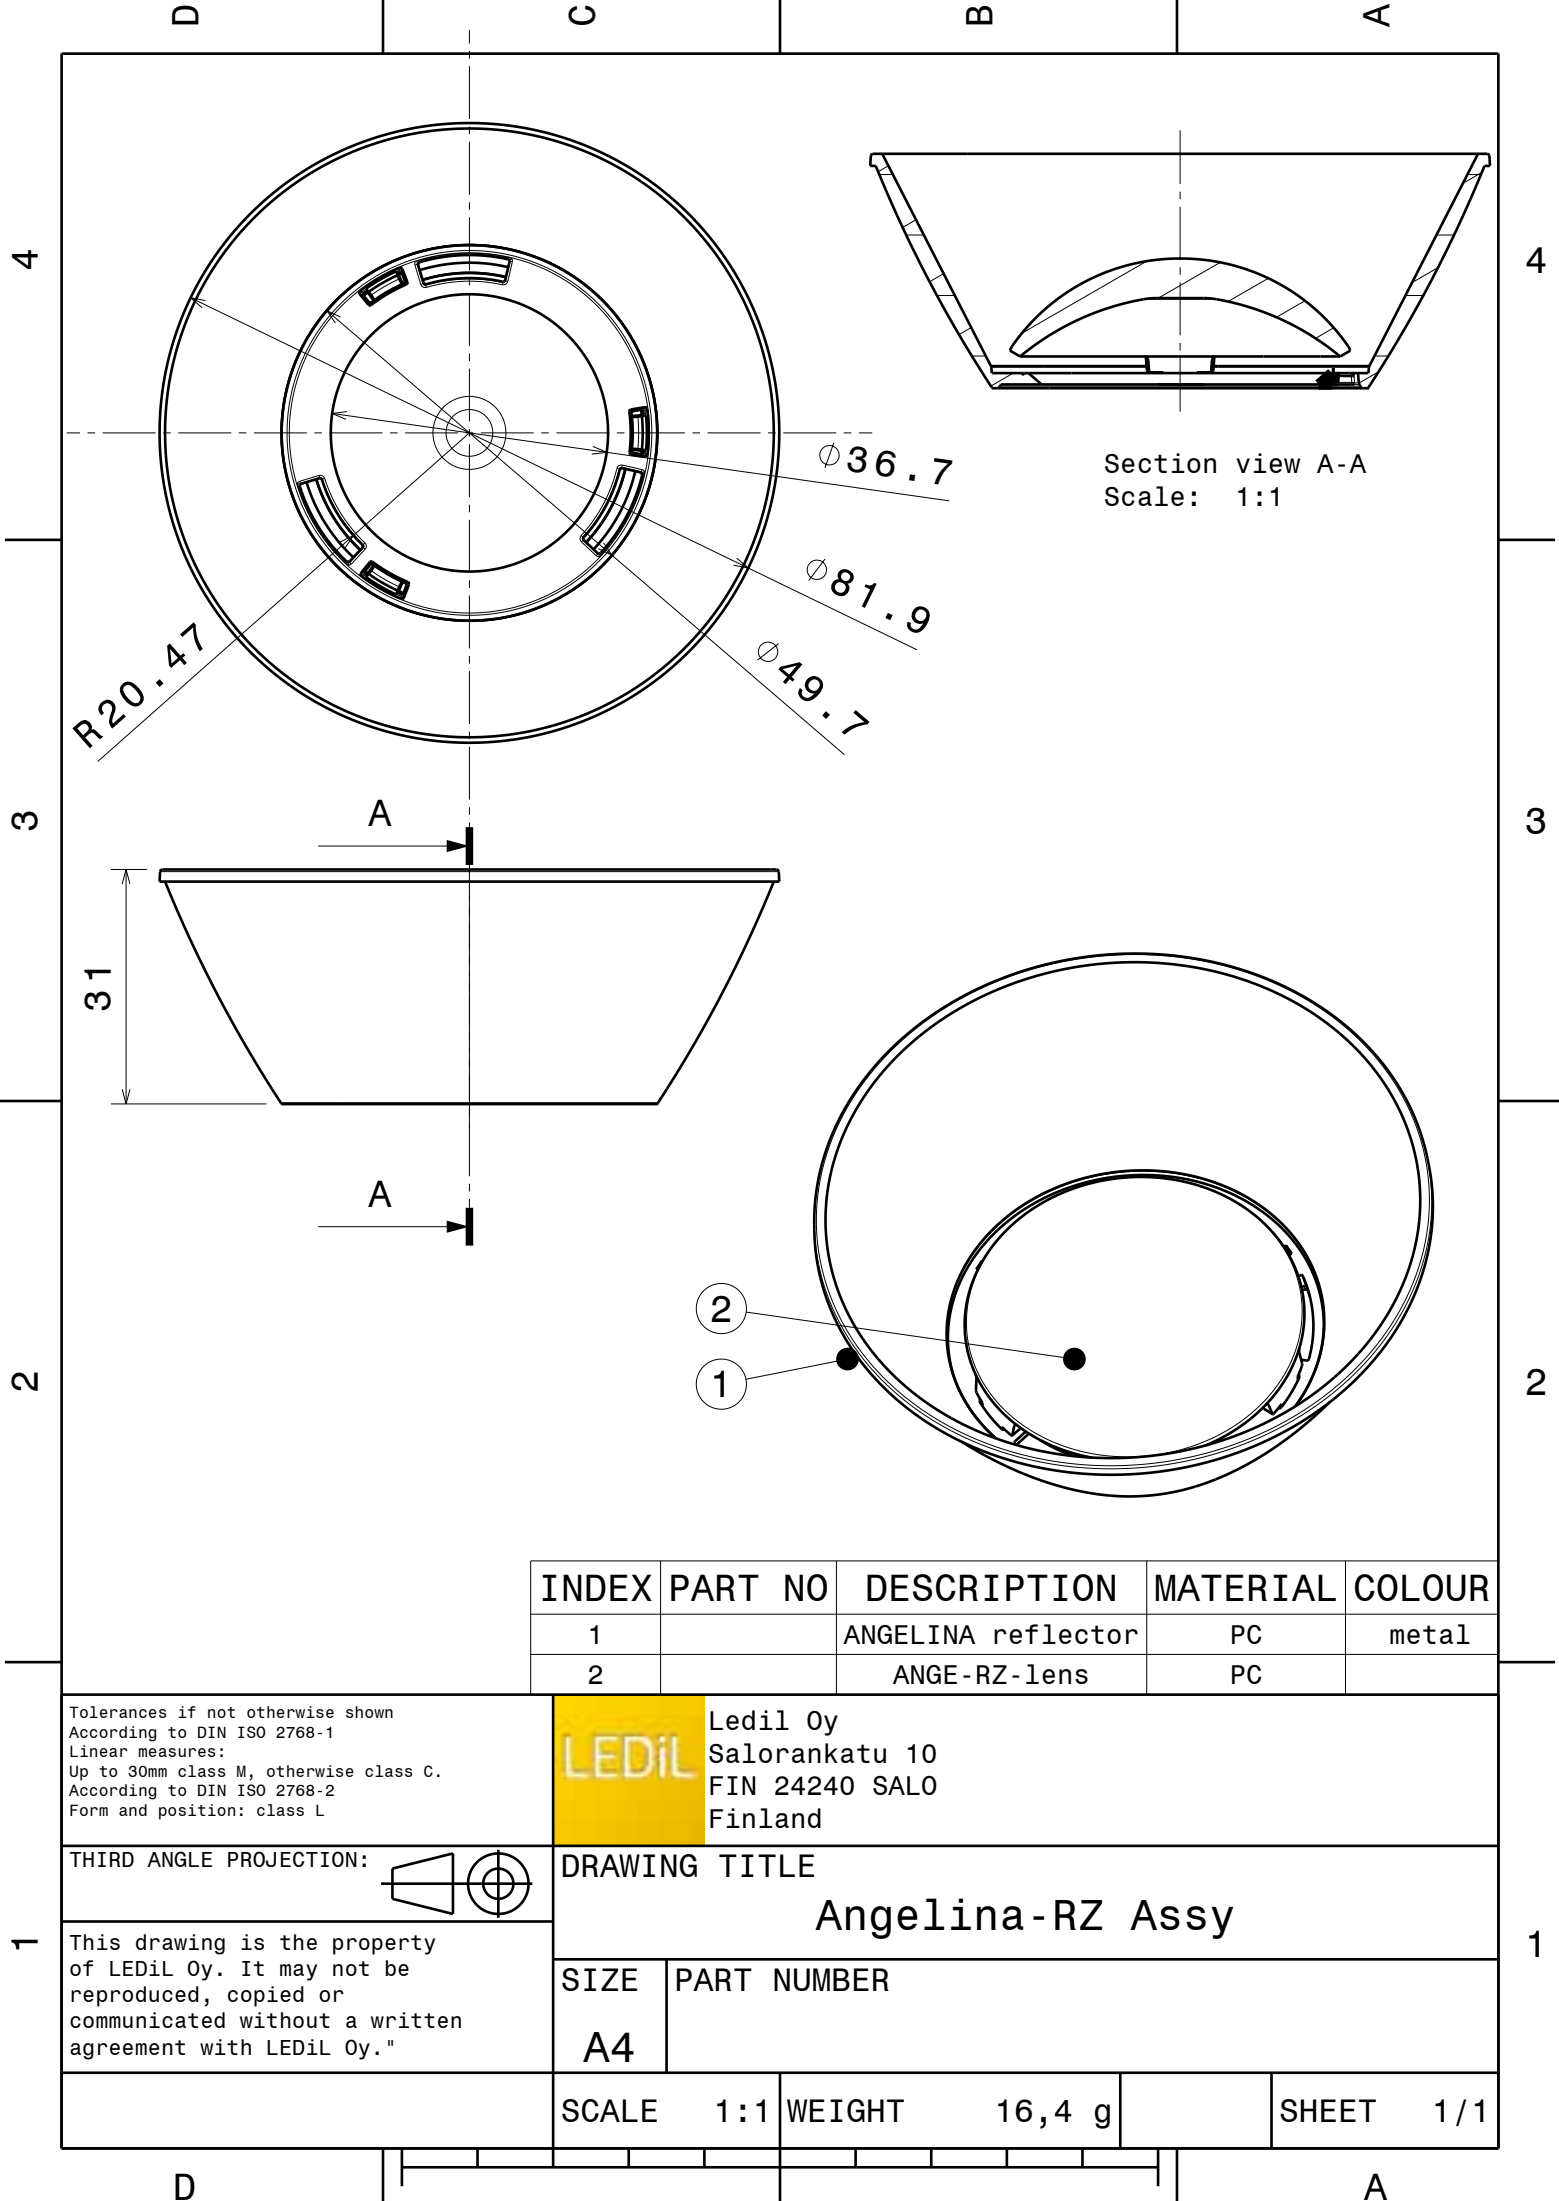

INDEX	PART NO	DESCRIPTION	MATERIAL	COLOUR
1		ANGELINA reflector	PC	metal
2		ANGE-RZ-lens	PC	

Tolerances if not otherwise shown
According to DIN ISO 2768-1
Linear measures:
Up to 30mm class M, otherwise class C.
According to DIN ISO 2768-2
Form and position: class L

LEDiL Ledil Oy
Salorankatu 10
FIN 24240 SALO
Finland




DRAWING TITLE
Angelina-RZ Assy

This drawing is the property
of LEDiL Oy. It may not be
reproduced, copied or
communicated without a written
agreement with LEDiL Oy."


SIZE	PART NUMBER
A4	

SCALE	1:1	WEIGHT	16,4 g	SHEET	1 / 1
-------	-----	--------	--------	-------	-------

Luminaire: LEDil Oy FC13976_ANGELINA-RZ-W_(Luxeon_K12) Efficiency=89%
Lamps: 1 x Luxeon K12 (LXK8-PW40-0012) 930lm @ 250mA CCT=4000K P=8.2W I=250mA

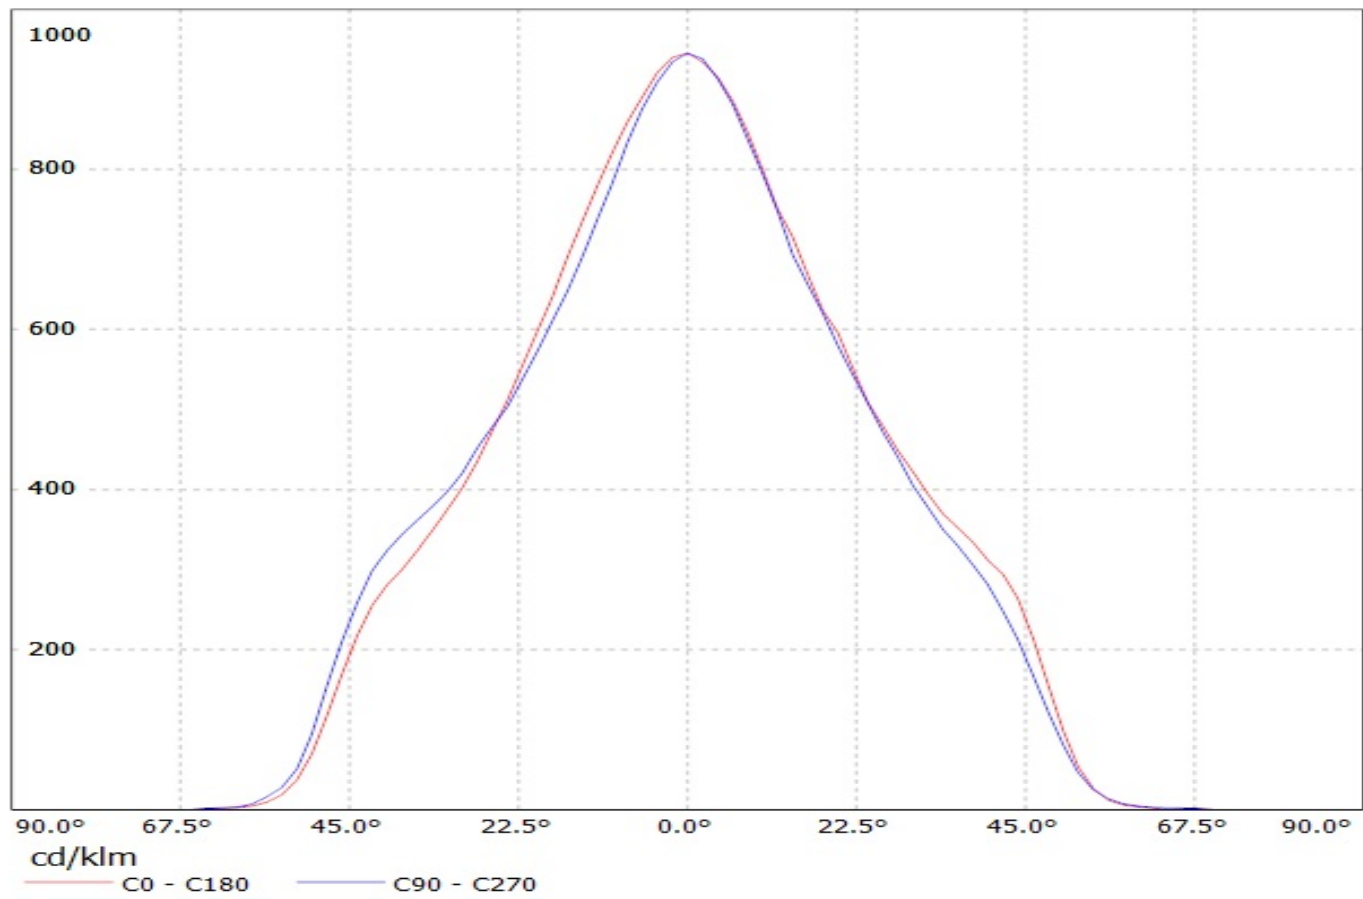


Luminaire: LEDil Oy FC13976_ANGELINA-RZ-W_(Luxeon_K16) Efficiency=89%
Lamps: 1 x Luxeon K16 (LXK8-PW40-0016) 1200lm @ 250mA CCT=4000K P=10.9W I=250mA

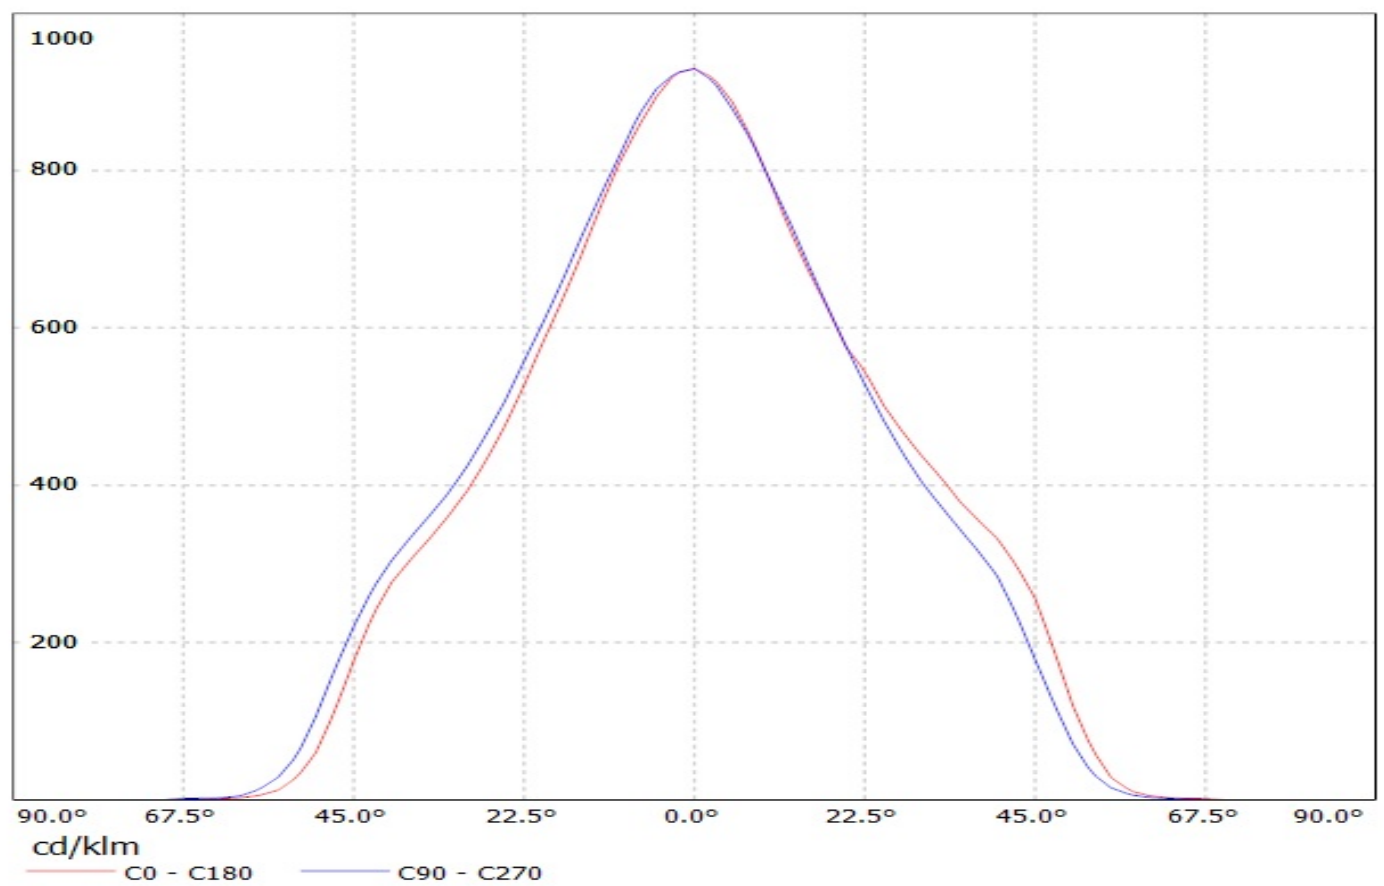


Luminaire: LEDiL Oy FC13976_ANGELINA-RZ-W_(NFDLJ130B+IDEAL)


Lamps: 1 x Nichia_NFDLJ130B_+50-2103NC_+50-2100AN_1422.52lm@250mA_CCT=4000K_P=8.91686W_I=0.25A

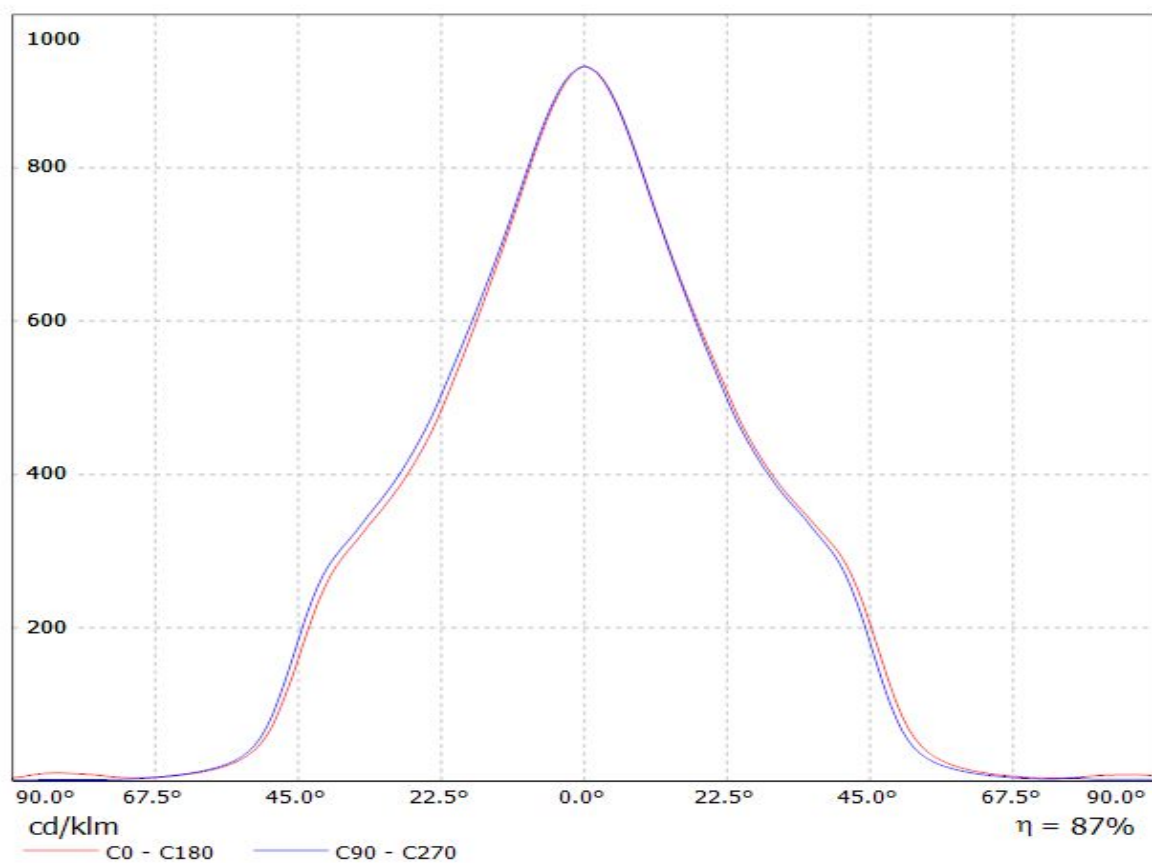


Luminaire: Ledil FC13976_ANGELINA-RZ-W_(PREVALED_Core_Z4)
Lamps: 1 x PREVALED_Core_Z4_LES19_1470.62lm@250mA_P=10.828W_I=0.25A

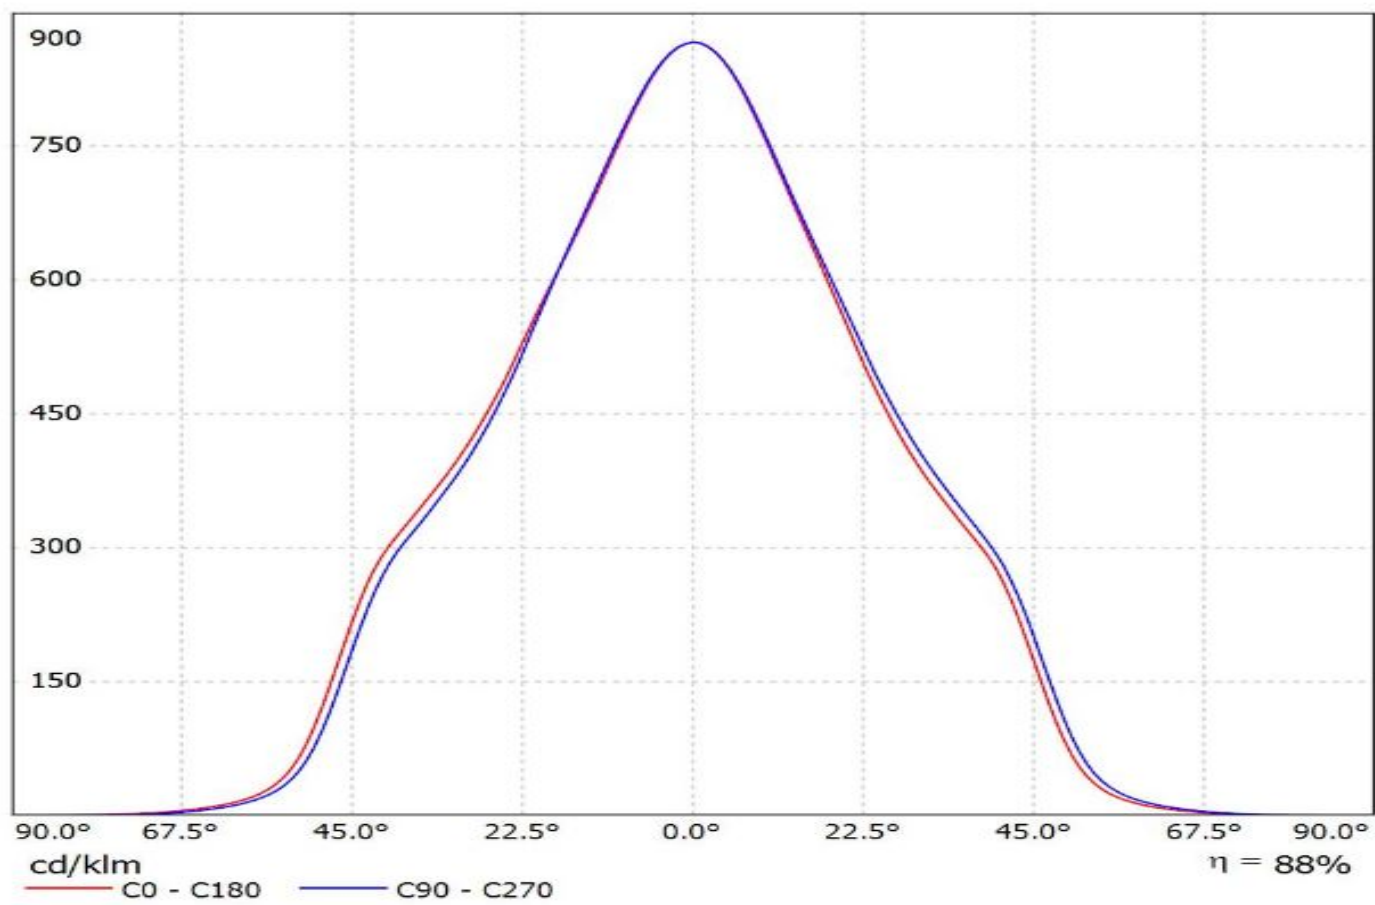

Luminaire: Ledil FC13976_ANGELINA-RZ-W_(SLM_G5_LES_15_+TE)
Lamps: 1 x Philips_SLM_G5_LES_15_+TE_2213194-1_1277.72lm@250mA_P=8.208W_I=0.25A

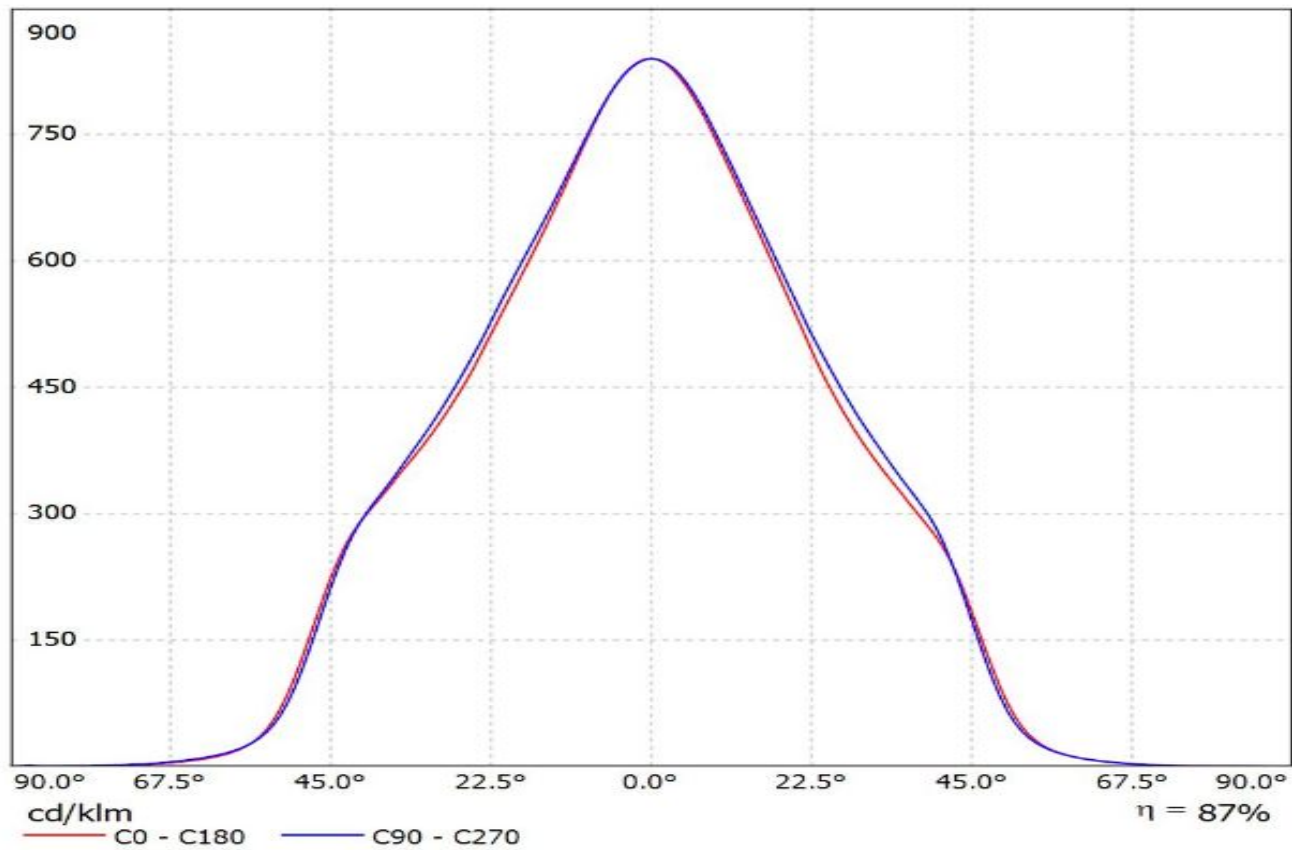

Luminaire: Ledil FC13976_ANGELINA-RZ-W_(SEOUL_AC_Zhaga_COB)
Lamps: 1 x SEOUL_AC_Zhaga_COB

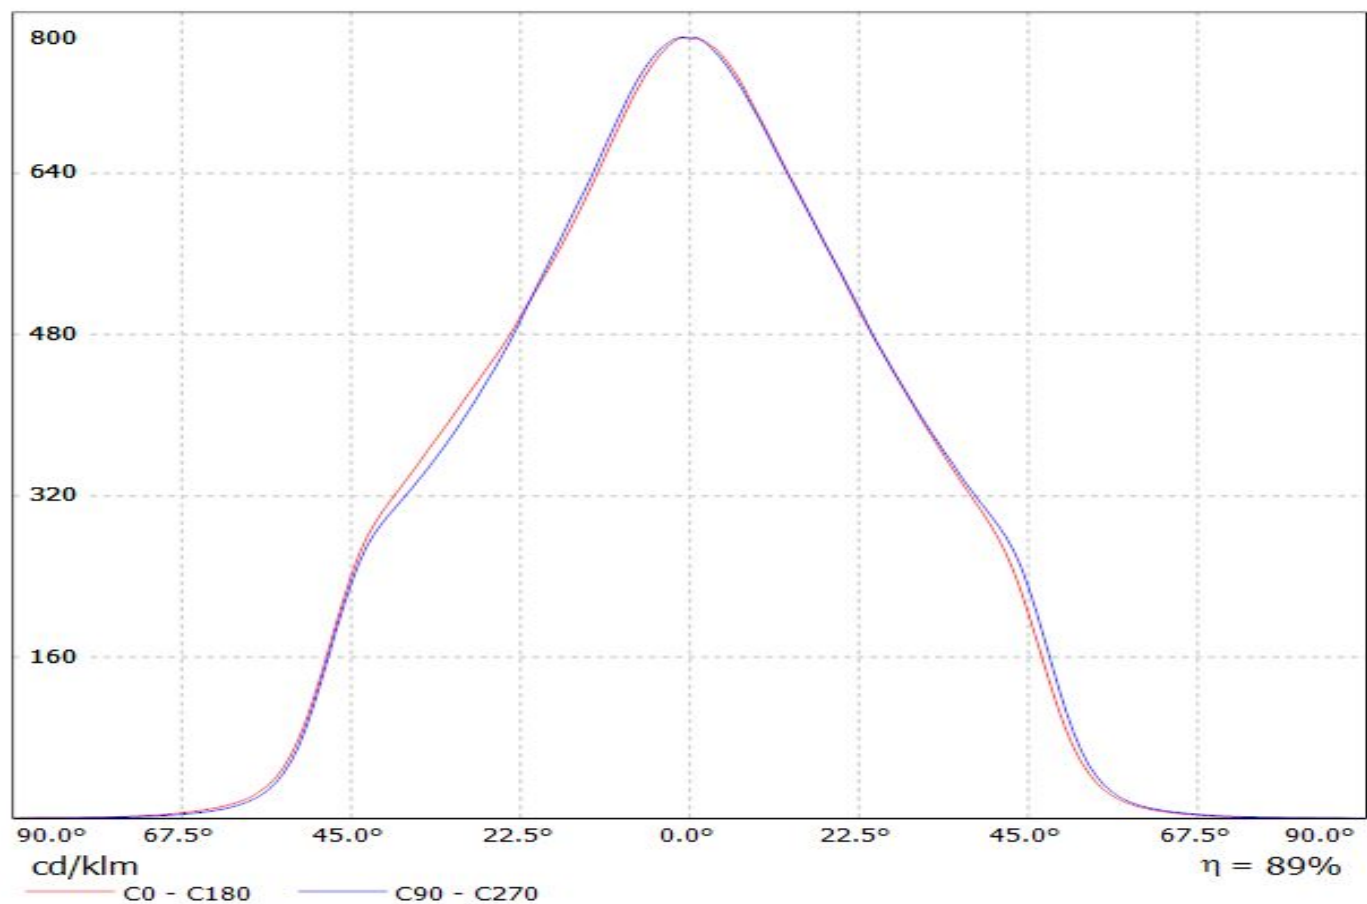


Ledil FC13976_ANGELINA-RZ-W_(MEZ_GW6) / LDC (Linear)


Luminaire: Ledil FC13976_ANGELINA-RZ-W_(MEZ_GW6)

Lamps: 1 x SHARP_Megazenigata_(GW6DME30NFC)


_1261.85lm@250mA_CCT=3038K_P=11.172W_I=0.25A

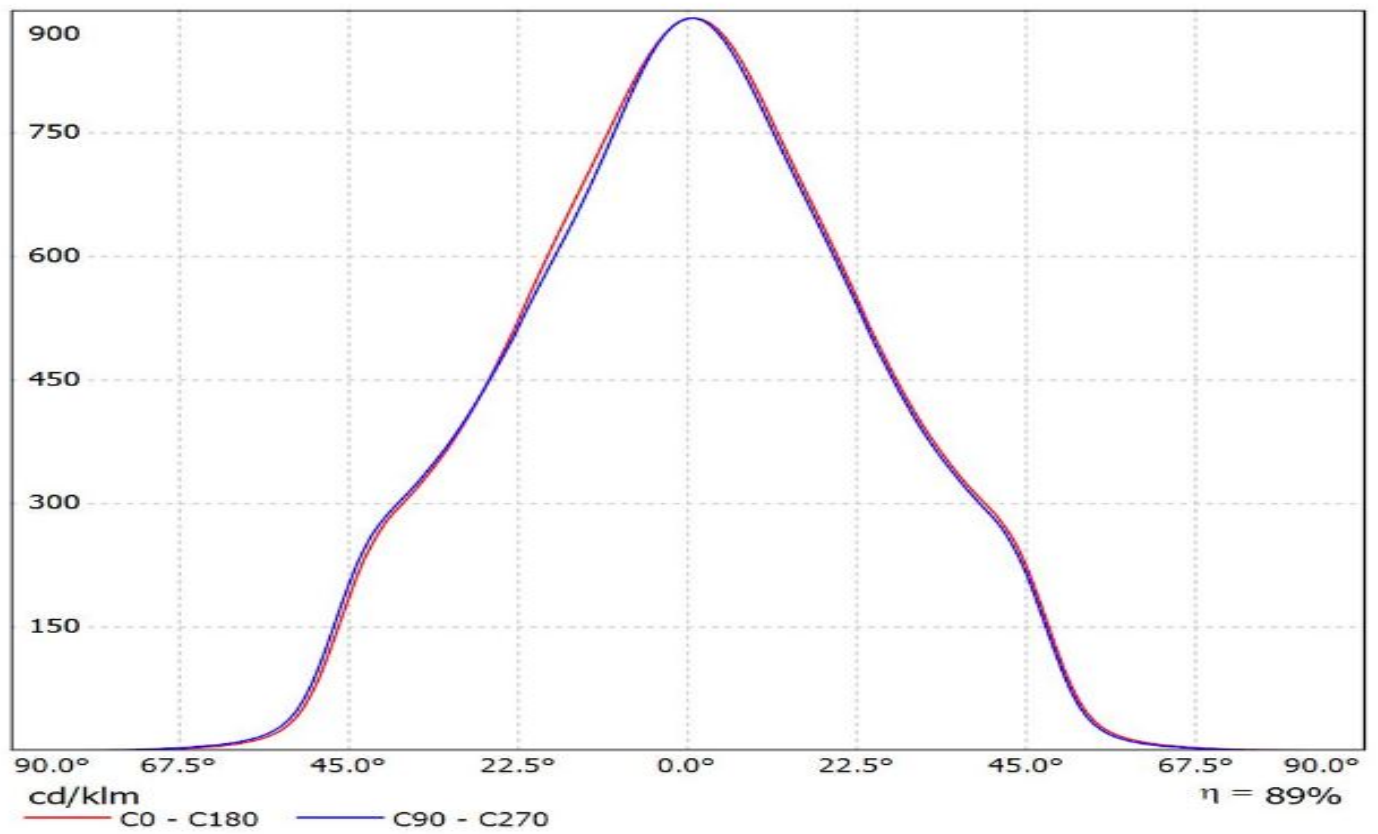

Luminaire: LEDil Oy FC13976_ANGELINA-RZ-W_(Luxeon_K12) Efficiency=89%
Lamps: 1 x Luxeon K12 (LXK8-PW40-0012) 930lm @ 250mA CCT=4000K P=8.2W I=250mA

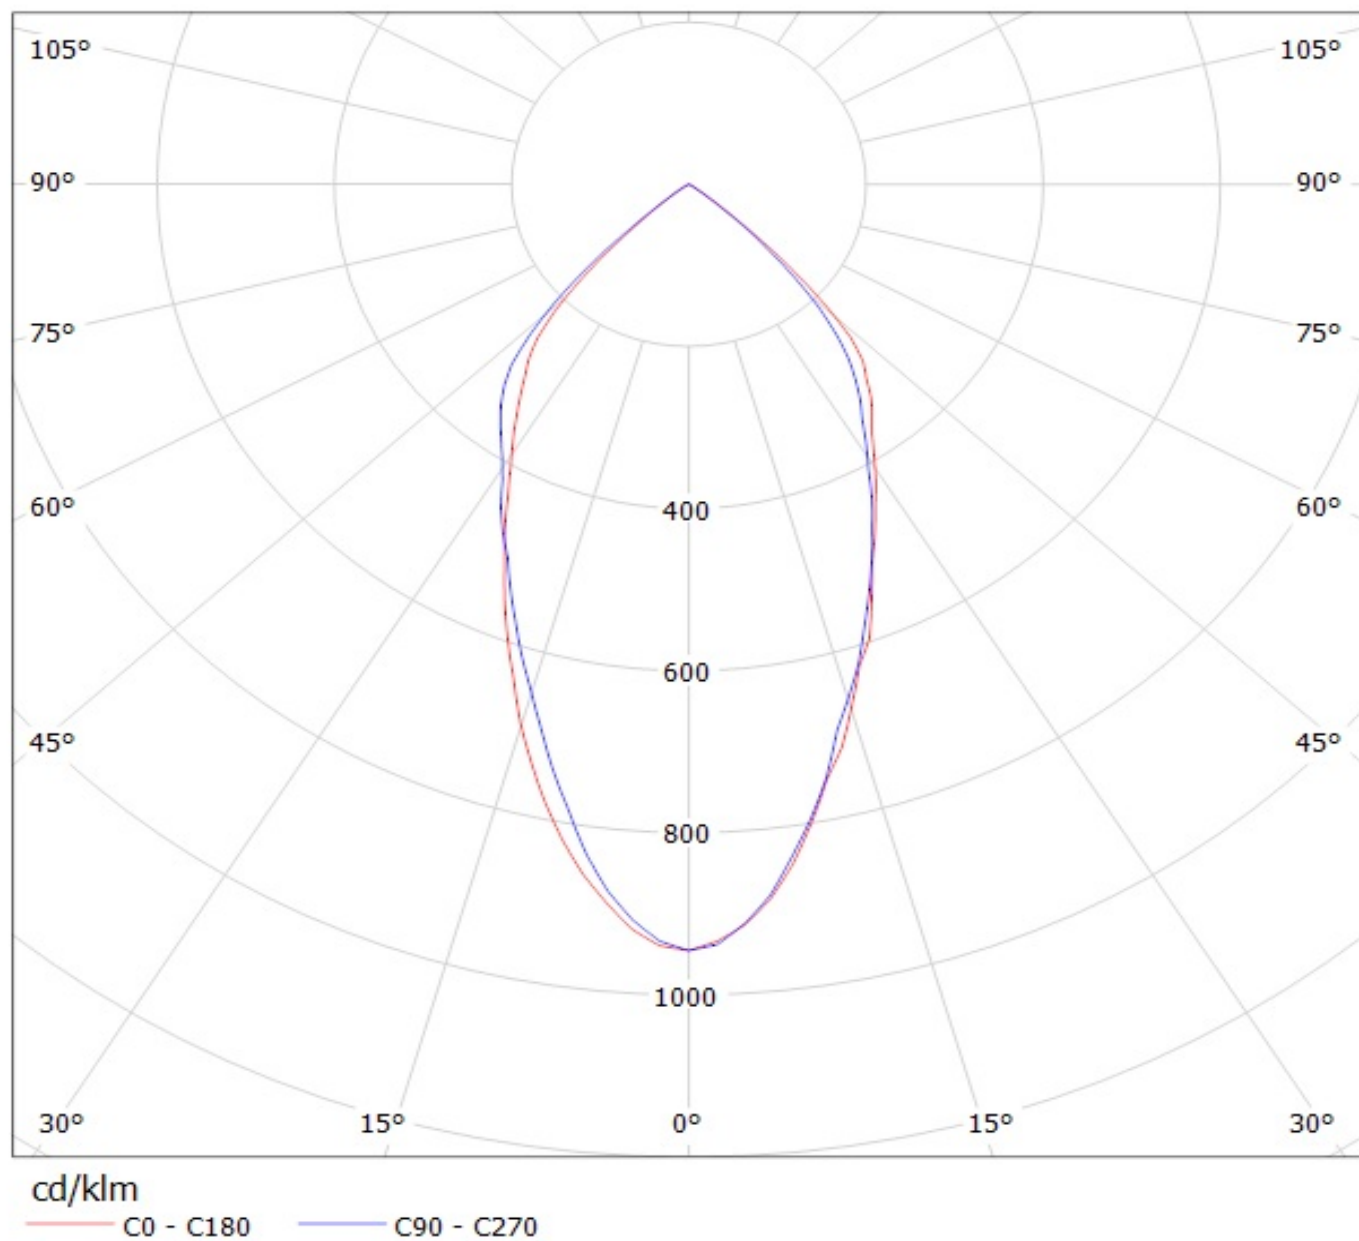


Luminaire: LEDil Oy FC13976_ANGELINA-RZ-W_(Luxeon_K16) Efficiency=89%
Lamps: 1 x Luxeon K16 (LXK8-PW40-0016) 1200lm @ 250mA CCT=4000K P=10.9W I=250mA

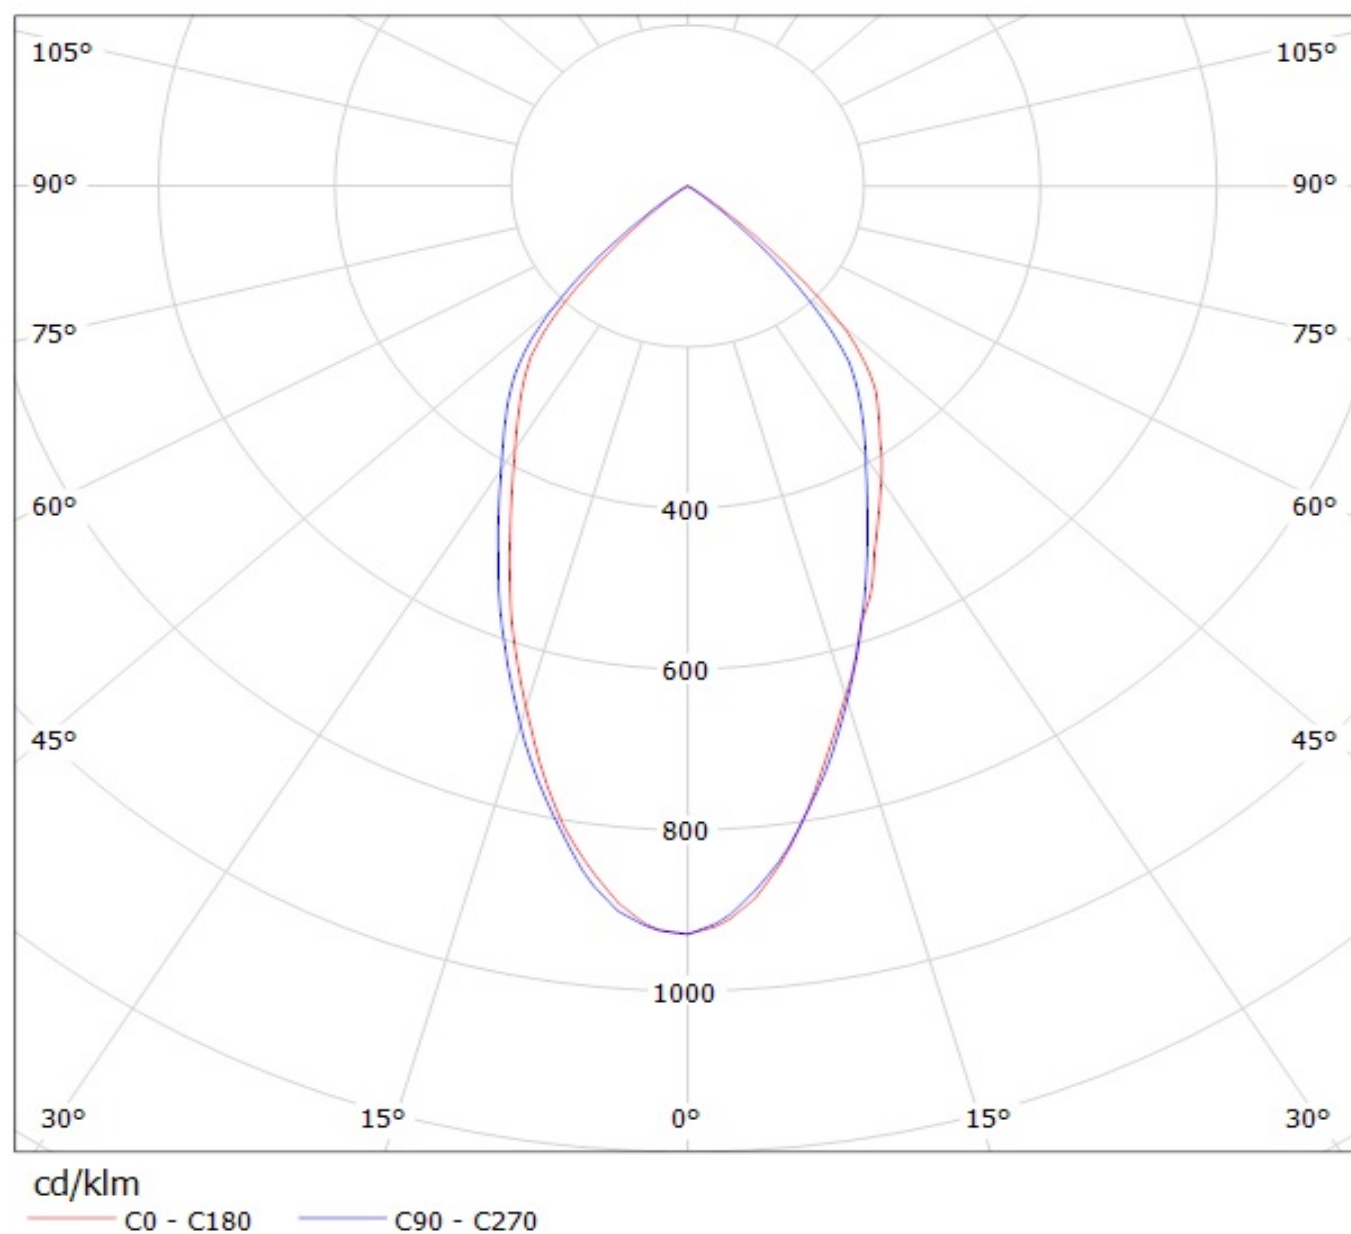


Luminaire: LEDiL Oy FC13976_ANGELINA-RZ-W_(NFDLJ130B+IDEAL)

Lamps: 1 x Nichia_NFDLJ130B_+50-2103NC_+50-2100AN_1422.52lm@250mA_CCT=4000K_P=8.91686W_I=0.25A

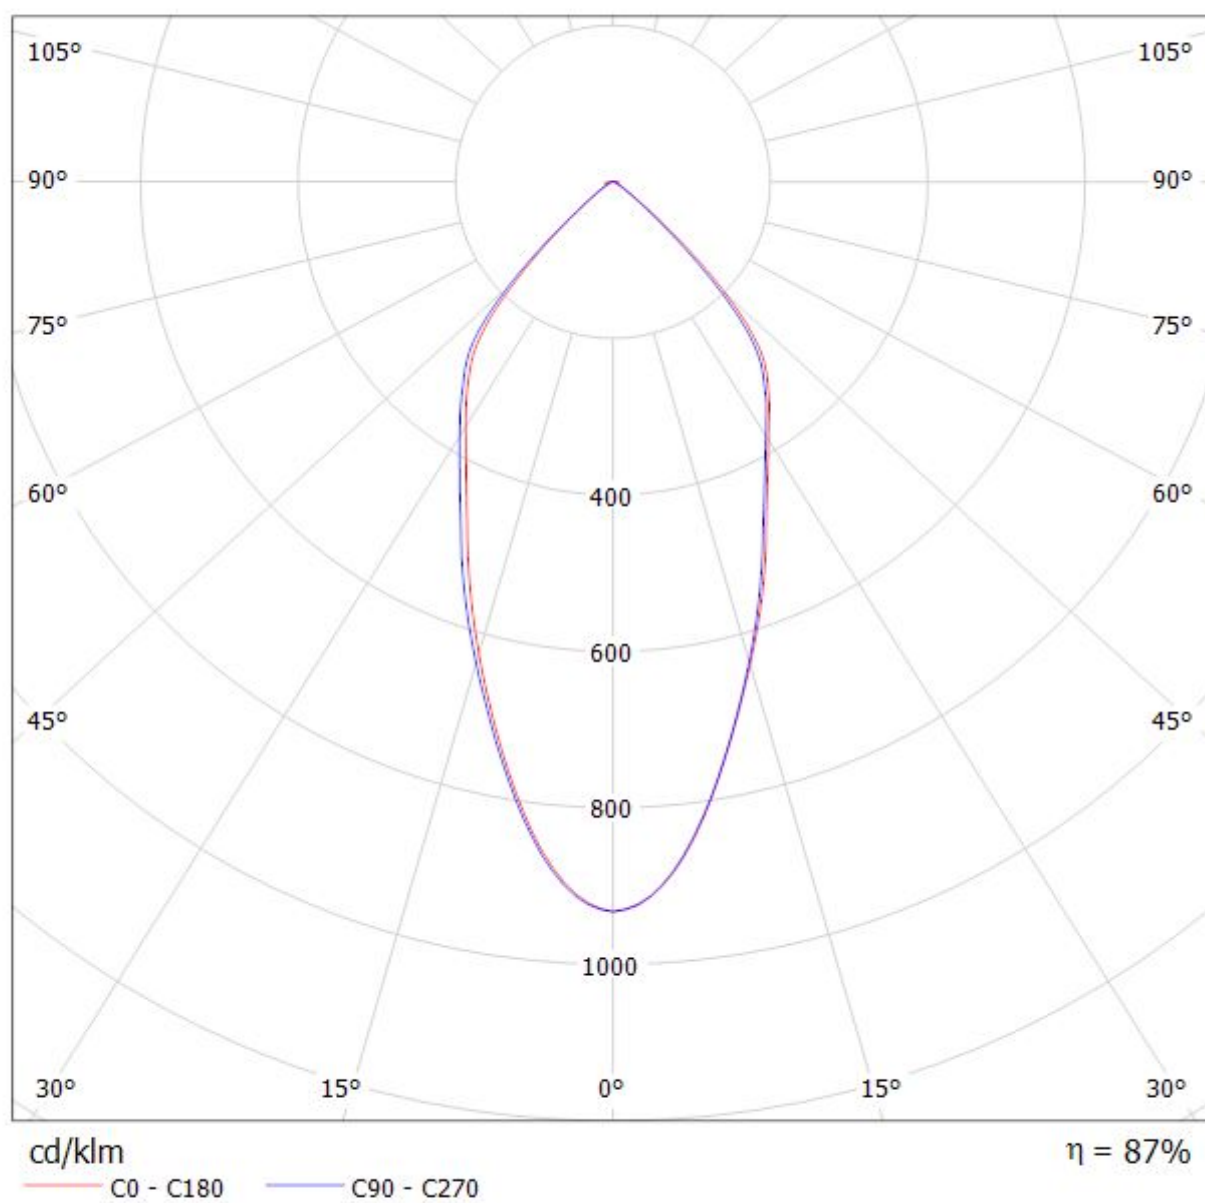

Luminaire: Ledil FC13976_ANGELINA-RZ-W_(PREVALED_Core_Z4)

Lamps: 1 x PREVALED_Core_Z4_LES19_1470.62lm@250mA_P=10.828W_I=0.25A

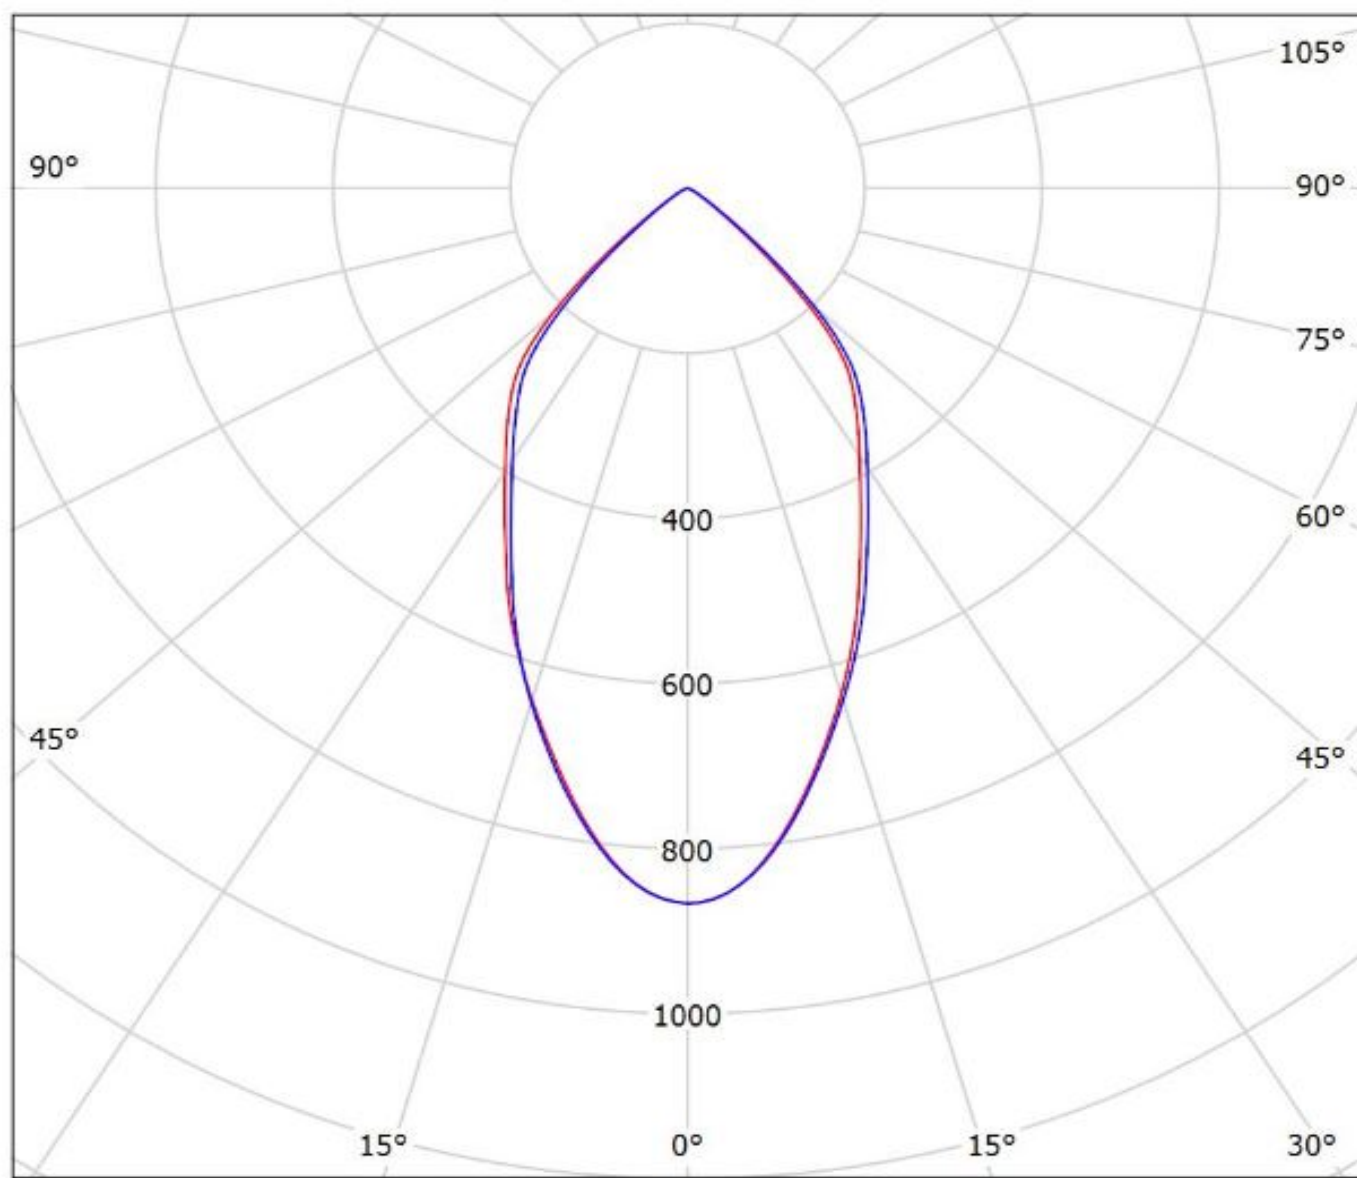

cd/klm


$\eta = 88\%$

— C0 - C180

— C90 - C270

Luminaire: Ledil FC13976_ANGELINA-RZ-W_(SLM_G5_LES_15_+TE)

Lamps: 1 x Philips_SLM_G5_LES_15_+TE_2213194-1_1277.72lm@250mA_P=8.208W_I=0.25A

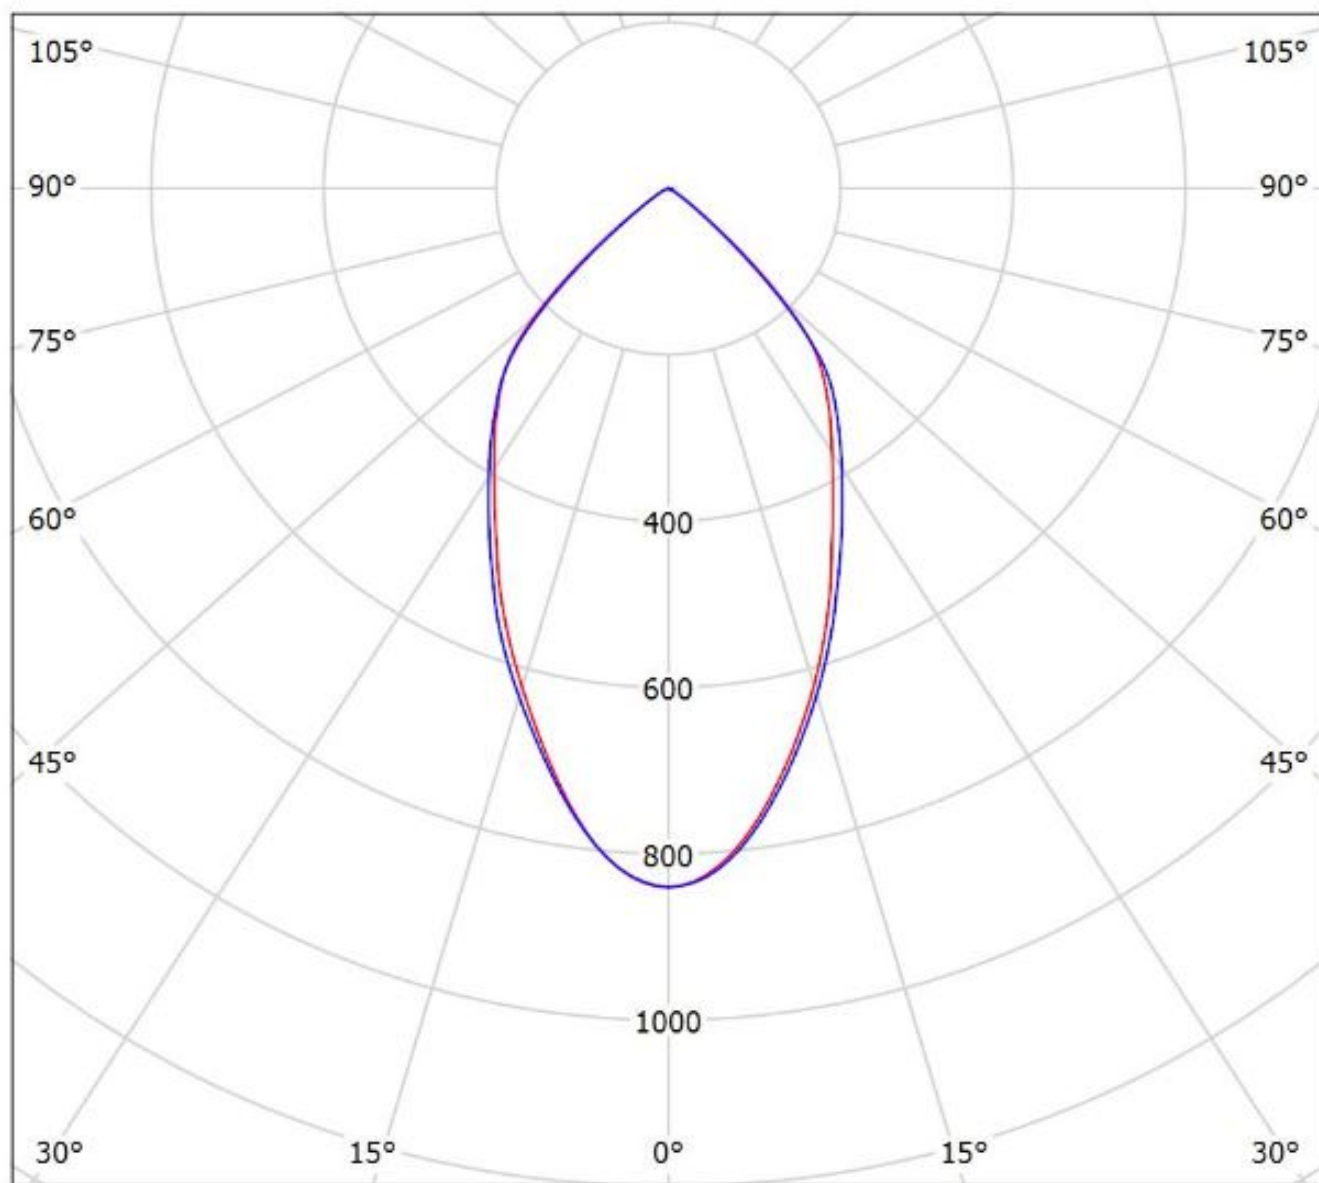


cd/klm

— C0 - C180

— C90 - C270

$\eta = 87\%$

Luminaire: Ledil FC13976_ANGELINA-RZ-W_(SEOUL_AC_Zhaga_COB)
Lamps: 1 x SEOUL_AC_Zhaga_COB

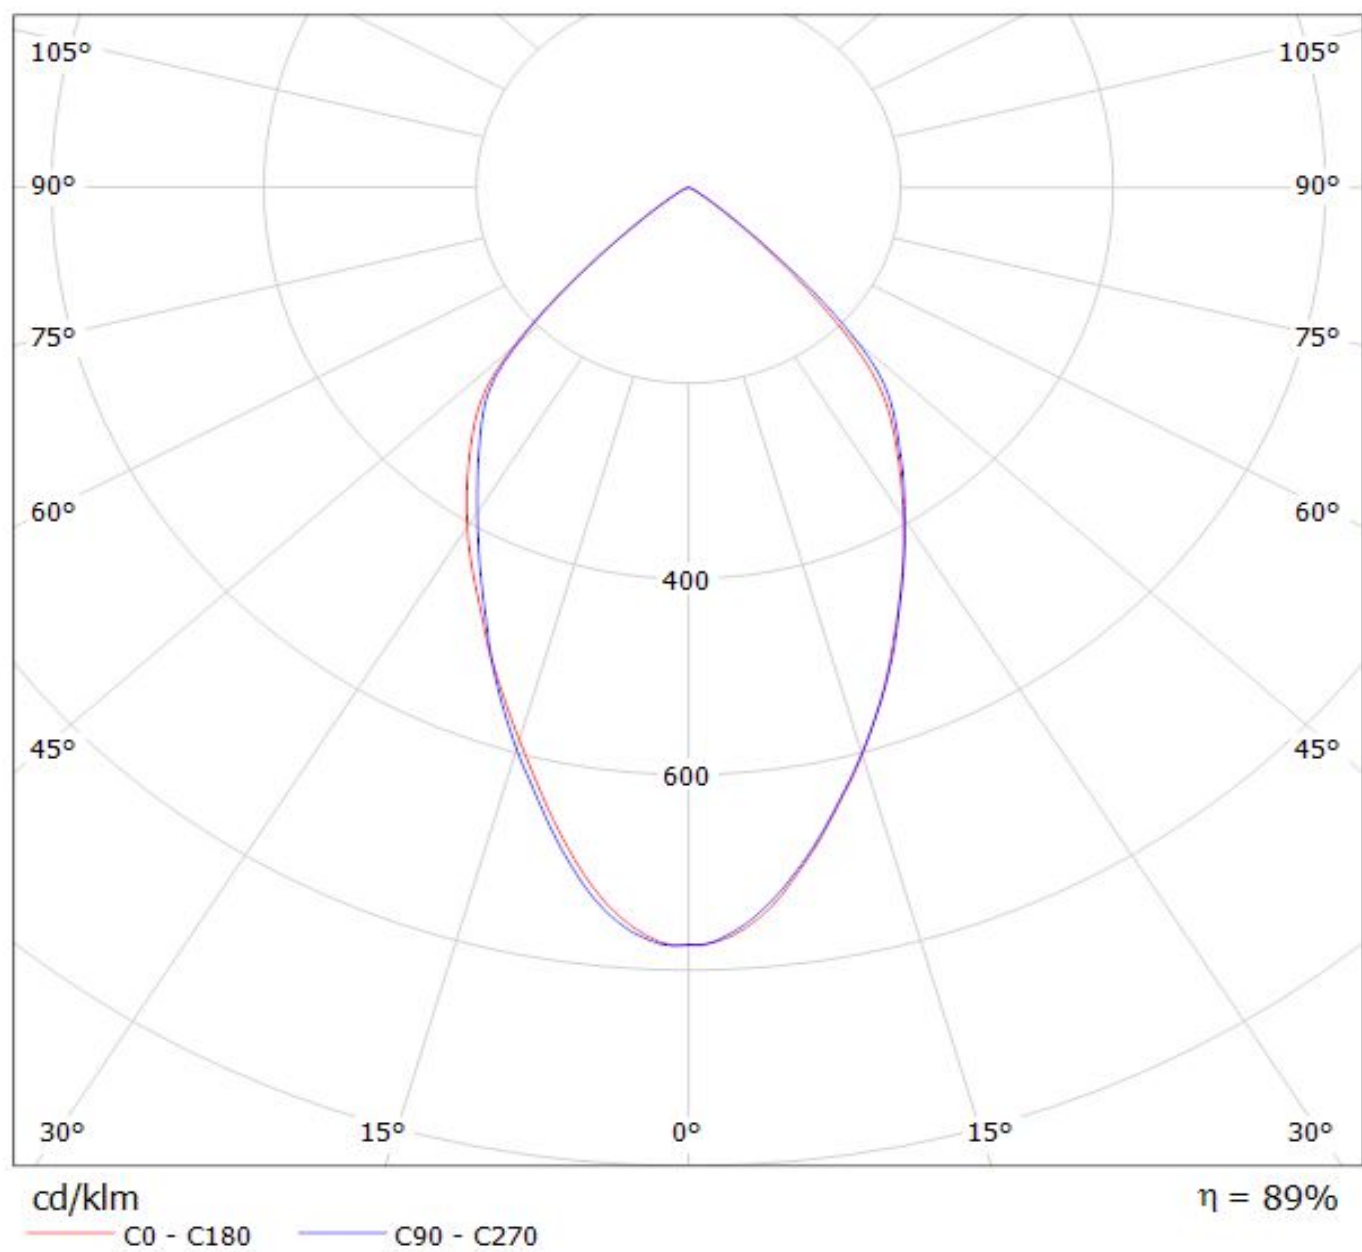


Ledil FC13976_ANGELINA-RZ-W_(MEZ_GW6) / LDC (Polar)

Luminaire: Ledil FC13976_ANGELINA-RZ-W_(MEZ_GW6)

Lamps: 1 x SHARP_Megazenigata_(GW6DME30NFC)

_1261.85lm@250mA_CCT=3038K_P=11.172W_I=0.25A

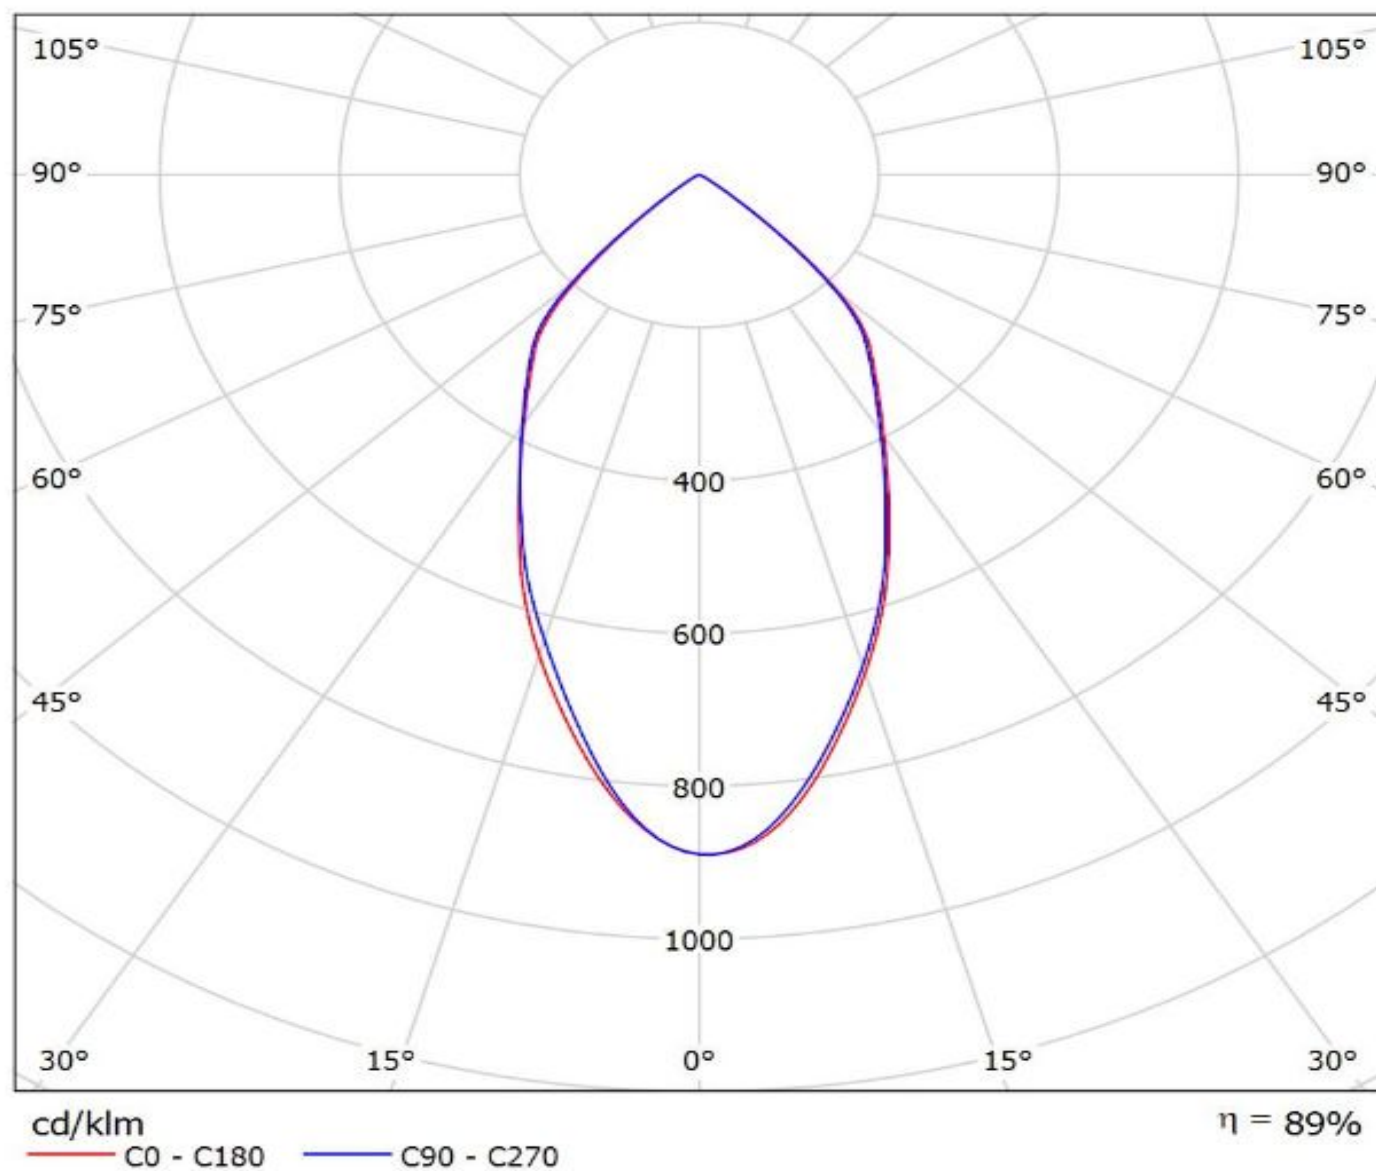

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.

GENERAL INFORMATION

- Product series especially designed & optimized for series of LEDs.
- Special care taken to make light distribution as uniform as possible.

Note! Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.