

MSD INC.

ENGINEERING DATA SHEET

RELAY TYPE: FCA-325-BX4

COMPUTER PART No.: 9383519

TEST PROCEDURE


MSDP-791

CUSTOMER/SPECIFICATION: CATALOG ITEM

REV NONE

TEST REQUIREMENTS

COIL RES.: $\pm 10\%$ 290 OHMS OPERATE TIME: 15ms MAX RELEASE TIME: 15ms MAX
 CONTACT MAKE BOUNCE: 1ms MAX N.O. BREAK BOUNCE: N/A
 CONTACT STABILIZATION TIME: N/A RATED COIL VOLTAGE: 28 Vdc
 CONTACT VOLTAGE DROP: MFG TEST: 0.5mV @ 100mA - 6 Vdc
 FINAL TEST: 60mV @ 10 A - 28 Vdc
 HI-POT: 1250Vrms ALL POINTS, EXCEPT 1000 Vrms COIL TO CASE
 INSULATION RESISTANCE: 100 MEGOHMS MIN @ 500 Vdc
 VIBRATION: N/A
 SEAL TEST: 1×10^{-8} MAX LEAK RATE COIL TRANSIENT SUPPRESSION: 42 Vdc MAX
 OTHER:

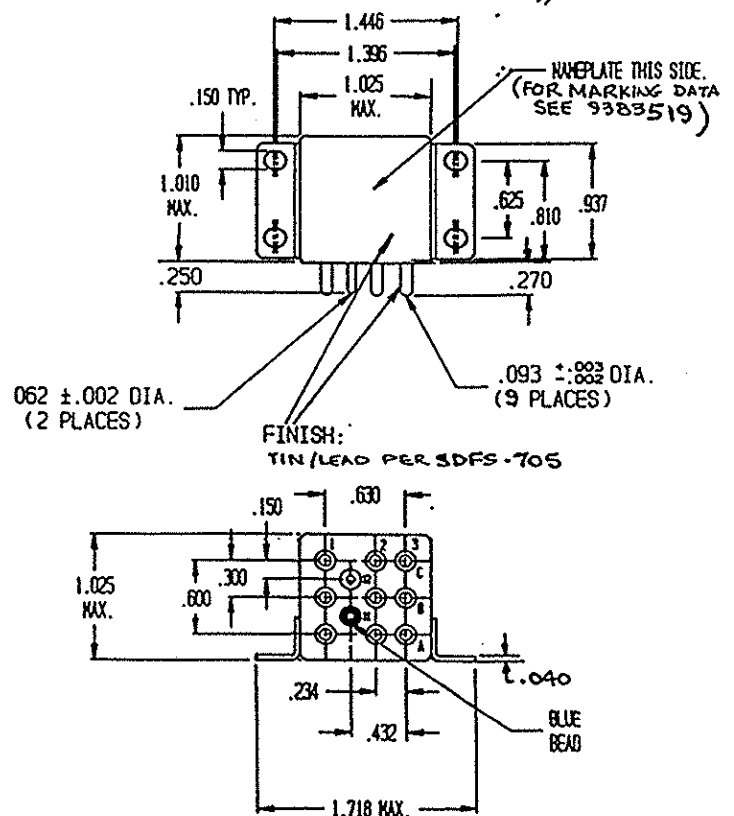

Prepared By: Date	Approved By: Date
LES WYNNE 3-14-96	<i>[Signature]</i> 3-19-96
Rev	ECN No.
A	96-065
	Date
	3-14-96

SPECIAL INSTRUCTIONS