

MSD INC.

ENGINEERING DATA SHEET

RELAY TYPE: FCA-325-CW3 | COMPUTER PART No.: 9383550

TEST PROCEDURE

CUSTOMER/SPECIFICATION: CATALOG ITEM

REV N/A

MSDP-791

 $\pm 10\%$

TEST REQUIREMENTS

COIL RES.: 290 OHMS OPERATE TIME: 15 mS MAX RELEASE TIME: 15 mS MAX

CONTACT MAKE BOUNCE: 1.0 mS MAX N.O. BREAK BOUNCE: N/A

CONTACT STABILIZATION TIME: N/A RATED COIL VOLTAGE: 28 Vdc

CONTACT VOLTAGE DROP: MFG TEST: 0.5 mV @ 100 mA - 6 Vdc

FINAL TEST: 60 mV @ 10 A - 28 Vdc


HI-POT: 1250 Vrms ALL POINTS, EXCEPT 1000 Vrms COIL TO CASE

INSULATION RESISTANCE: 100 MEGOHMS MIN @ 500 Vdc

VIBRATION: N/A

SEAL TEST: 1×10^{-8} MAX LEAK RATE COIL TRANSIENT SUPPRESSION: N/A

OTHER:

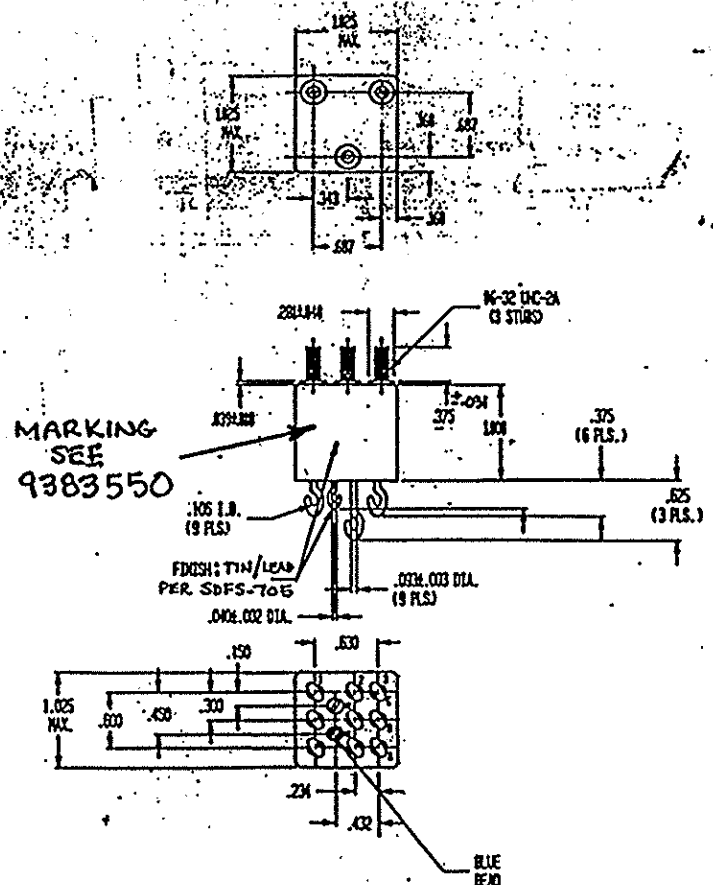

Prepared By: Date		Approved By: Date	
LES WYNNE 6-14-96			
Rev	ECN No.	Date	

SPECIAL INSTRUCTIONS