

ENGINEERING DATA SHEET

RELAY TYPE: FCA-325-CX4	COMPUTER PART No.: 9383508
-------------------------	----------------------------

TEST PROCEDURE

CUSTOMER/SPECIFICATION:	CATALOG ITEM	REV	N/A
-------------------------	--------------	-----	-----

MSDP- 791

TEST REQUIREMENTS

TEST REQUIREMENTS
COIL RES.: $\pm 10\%$ 290 OHMS OPERATE TIME: 15 mS MAX RELEASE TIME: 15 mS MAX

CONTACT MAKE BOUNCE: 1.0 ms MAX N.O. BREAK BOUNCE: 0.1 ms MAX

CONTACT STABILIZATION TIME: N/A RATED COIL VOLTAGE: 28 Vdc

CONTACT VOLTAGE DROP: MFG TEST: 0.5 mV @ 100 mA - 5 Vdc

FINAL TEST: 60 mV @ 10A - 28 Vdc



HI-POT: 1250 V_{rms} ALL POINTS, EXCEPT 1000 V_{rms} COIL TO CASE

INSULATION RESISTANCE: 100 MEGOHMS MIN @ 500 Vdc

VIBRATION: N/A

SEAL TEST: 1×10^{-8} MAX LEAK RATE COIL TRANSIENT SUPPRESSION: 42 Vdc MAX

OTHER:

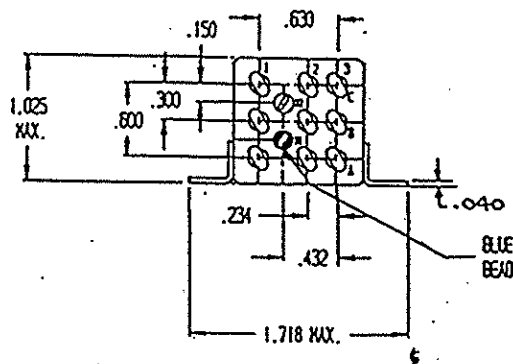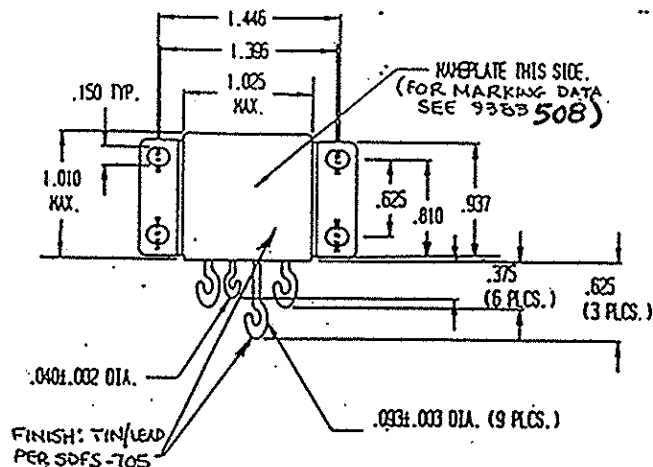

Prepared By: Date		Approved By: Date
LES WYNNE 31896		<i>John L. Lyle</i> 3-18-96
Rev	ECN No.	Date
A	96-065	3-18-96

SPECIAL INSTRUCTIONS