
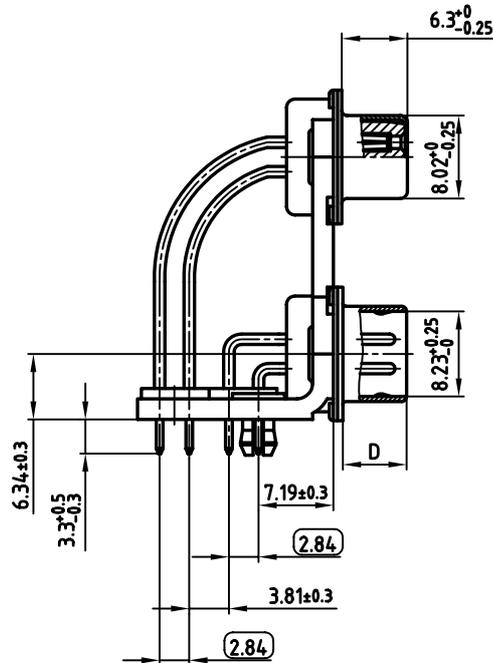
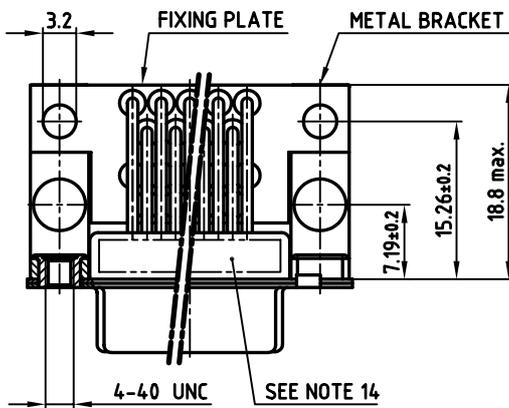


used for: D-SUB FILTER DUAL PORT

| POS. | A _{-0.76} | B1 ^{+0.25} | B2 _{-0.25} | C | D _{-0.3} | PART-NO. |
|------|--------------------|---------------------|---------------------|---|-------------------|------------------|
| 2x 9 | 31.19 | 16.79 | 16.46 | 25.00 ^{+0.12} _{-0.13} | 6.12 | FDCNSPTAN13S132X |
| 2x15 | 39.52 | 25.12 | 24.79 | 33.30 ^{+0.15} _{-0.1} | 6.12 | FDCPSPTAN13S132X |
| 2x25 | 53.42 | 38.84 | 38.50 | 47.04 ^{+0.13} | 5.99 | FDCRSPTAN13S132X |
| 2x37 | 69.70 | 55.30 | 54.96 | 63.50 ^{+0.13} | 5.99 | FDCSSPTAN13S132X |

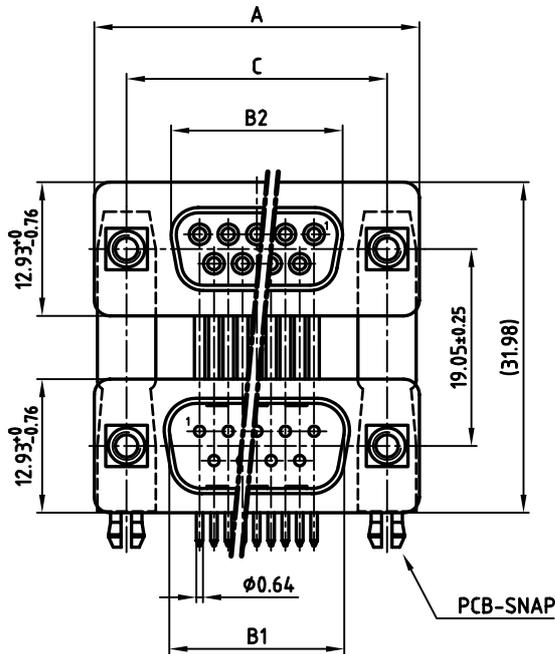

NOTES:

1. RoHS COMPLIANT
2. SUITABLE FOR WAVE SOLDERING
3. METALSHELLS: COPPER ALLOY; min. 320µ" TIN
4. INSULATORS: HIGH TEMPERATURE PLASTIC UL 94 V-0, BLACK
5. CONTACTS: COPPER ALLOY
PLATING: 8µ" HARD GOLD OVER min. 50µ" NICKEL
6. METAL BRACKET: STEEL; min. 320µ" TIN over 80µ" NICKEL
7. THREADED INSERT: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
8. PCB-SNAP: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
PCB-HOLE: Ø3.1±0.1; PCB THICKNESS 1.6mm
9. FIXING-PLATE: HIGH TEMPERATURE PLASTIC UL 94 V-0, BLACK
10. P.C.B. HOLE DRILLINGS ON SHEET 2 +3
11. CAPACITANCE: 1300pF ±20%
12. DIELECTRIC WITHSTANDING VOLTAGE: 424 VDC
13. MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
14. CONNECTOR IS PART MARKED: PART-NO. CONEC ABC
15. = CHECK DIMENSION

Directive 2002/95/EC
 „RoHS“
 Compliant


| | |
|---|--------|
| APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL | |
| CUSTOMER APPROVAL DATE: | |
| NAME: | TITLE: |
| COMPANY NAME: | |
| APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL | |

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY, WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND


| | | | |
|------|-------------|------|------|
| rev. | description | date | name |
| a | Origin | | |

| | | | |
|------------|--------|---|-------|
| tolerance | | scale: 2:1 | |
| dim. in mm | | material: SEE NOTES | |
| 2006 | date | name | |
| drawn | 24.01. | Schmidt | |
| appd. | 24.01. | Fischer | |
| norm | | DIN 41652 | |
| d-old | | | |
| a | | Origin | |
| CONEC® | | title: | |
| | | D-SUB FILTER DUAL PORT 19.05mm FEMALE / MALE 2x9pos. - 2x37pos. with threaded insert and 2 PCB clips | |
| dwg no: | | AutoCAD 2004 | DIN-A |
| | | 24K1A748 | |
| part no: | | SEE TABLE | |
| | | 3 sh:1/3 | |


used for: D-SUB FILTER DUAL PORT

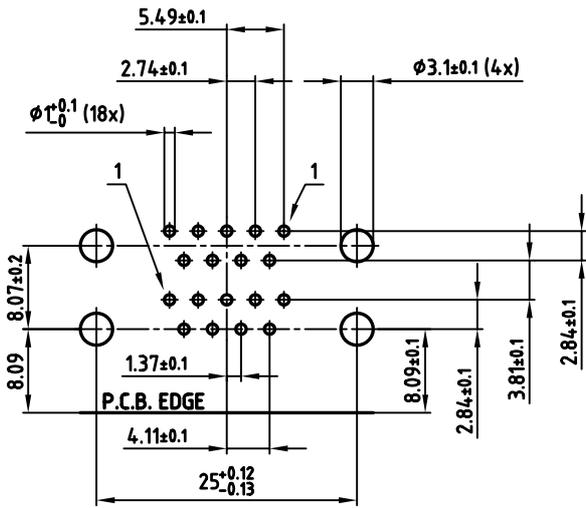

2x9pos.

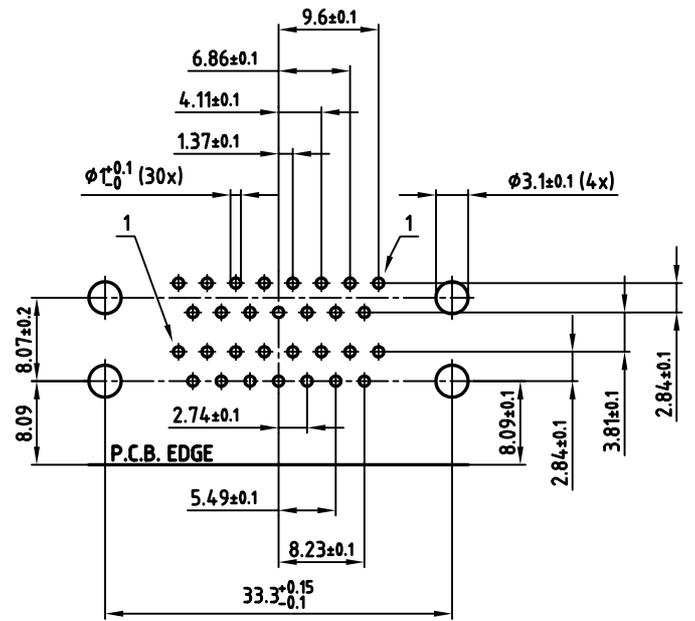

2x15pos.

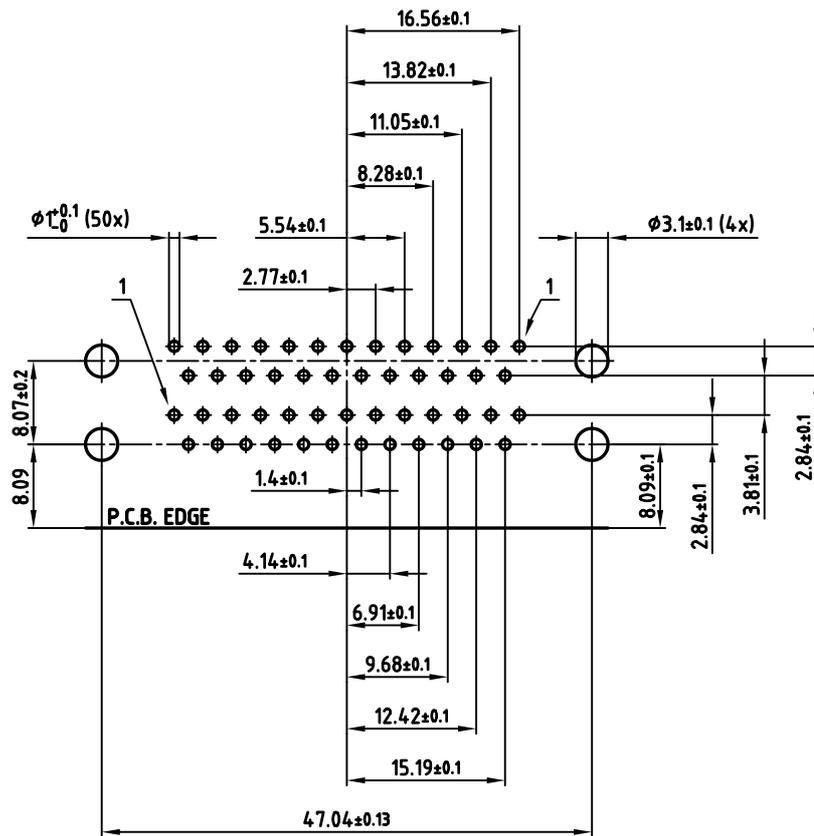

2x25pos.

APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL

CUSTOMER APPROVAL DATE:

NAME: TITLE:

COMPANY NAME:

APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY, WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND


| rev. | description | date | name |
|------|-------------|------|------|
| a | Origin | | |

| | | | |
|-----------|------------|-----------|--------------|
| tolerance | | scale: | 2:1 |
| | dim. in mm | material: | SEE SHEET 1 |
| 2006 | date | name | |
| drawn | 24.01. | Schmidt | |
| appd. | 24.01. | Fischer | |
| norm | DIN 41652 | | |
| d-old | | | |
| | | dwg no: | AutoCAD 2004 |
| | | | DIN-A |
| | | | 3 |
| | | | sh:2/3 |

title: P.C.B. HOLE DRILLINGS
D-SUB FILTER DUAL PORT 19.05mm
FEMALE / MALE 2x9pos. - 2x25pos.

part no: SEE SHEET 1

used for: D-SUB FILTER DUAL PORT

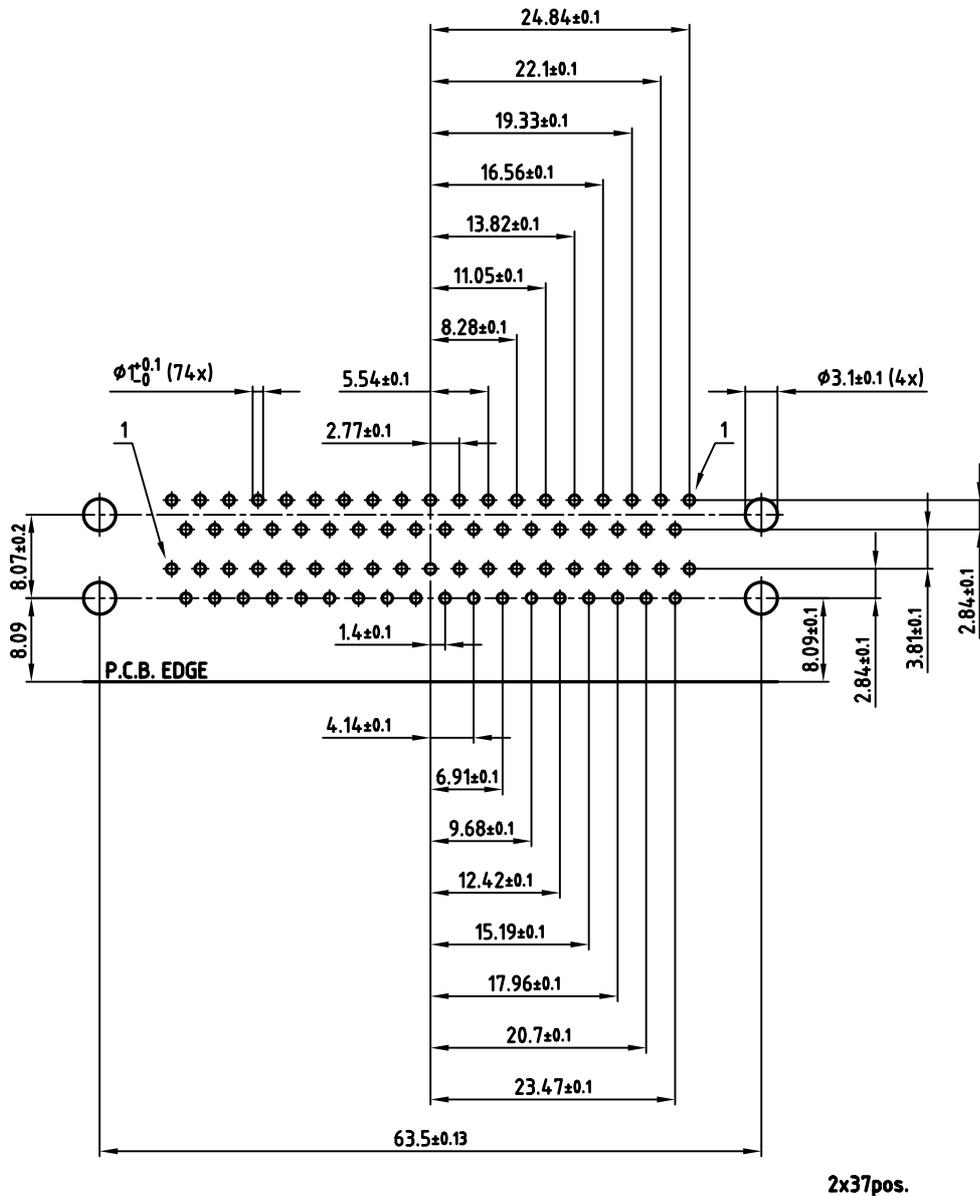

2x37pos.

| | |
|---|--------|
| APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL | |
| CUSTOMER APPROVAL DATE: | |
| NAME: | TITLE: |
| COMPANY NAME: | |
| APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL | |

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY, WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND

| rev. | description | date | name |
|------|-------------|------|------|
| a | Origin | | |

| | | |
|-----------|--------|----------------|
| tolerance | | dim. in mm |
| 2006 | date | |
| drawn | 24.01. | name |
| appd. | 24.01. | Fischer |
| norm | | DIN 41652 |
| d-old | | |
| | | |

| | | |
|--|--------------|--------|
| scale: | 2:1 | |
| material: | SEE SHEET 1 | |
| title: | | |
| P.C.B. HOLE DRILLINGS D-SUB FILTER DUAL PORT 19.05mm FEMALE / MALE 2x37pos. | | |
| dwg no: | AutoCAD 2004 | DIN-A |
| | 24K1A748 | 3 |
| part no: | SEE SHEET 1 | |
| | | sh:3/3 |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[CONEC:](#)

[FDCPSPTAN13S132X](#) [FDCSSPTAN13S132X](#)