

SUMMARY

Wires

Low	0
High	0
Coax	0
Triax	1
Quad	0
Fiber	0
Fluidic	0



Download

[Request a quote](#)

[Catalog](#)

Series	3T
Termination type	Male solder
IP rating	66
Cable Ø	8.80 - 9.30 mm
Matching parts	PCA.3T.675.CTLY92

TECHNICAL DETAILS

Mechanics

Shell Style/Model	FFA*: Straight plug with cable clamping
Keying	Circular (can rotate), plug has male contact(s)
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	Y92: 8.8 - 9.3 mm
Variant	

Performance

Configuration	3T.675 : 1 Triax (75 Ohm)
Insulator	T: PTFE
Rated Current	8 Amps

Specifications

Contact Type: Triaxial 75 Ohm (Solder)
Max. Matings:
R (max): mOhm
Vtest: 1200 V (AC), 1690 V (DC)
Impedance: 75 Ohm


Others

Temp (min / max): -55°C / +200°C

Humidity (max): <=95% [at 60 deg C / 140 F]
Vibration: 15 g [10 Hz - 2000 Hz]
Shock Resistance: 100 g [6 ms]
Salt Spray Corrosion: >144 hr
Climatical Category: 50/175/21
Shielding (min): 75 dB (10 MHz)
Shielding (min): 40 dB (1 GHz)
IP Rating: 66

DRAWINGS

Draws

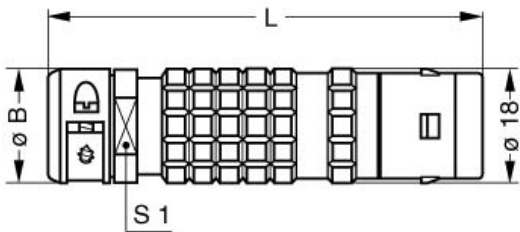

Dimensions

	B	L	S1
mm.	20	71	18
in.	0,79	2,80	0,71

RECOMMENDED BY LEMO

Tools

None

Cables