



REVISION R

DO NOT SCALE FROM THIS PRINT

NOTE:
1. $\text{\textcircled{C}}$ REPRESENTS A CRITICAL DIMENSION.

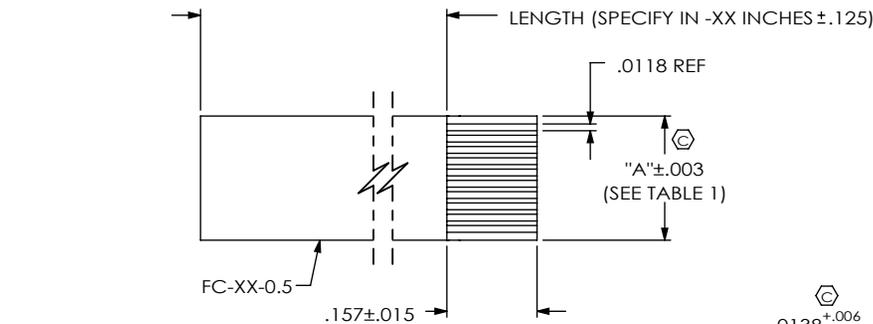

FJH-XX-X-XX.XX-X

No OF POSITIONS
-06, -10, -15, -20, -24, -25, -30, -40, -43, 50 (SEE TABLE 1)

STRIP LENGTH
-4: 4MM (.15748")

STYLE
*S: SINGLE ENDED
-D: DOUBLE ENDED
-R: REVERSE STIFFENER

LENGTH
-XX.XX INCHES ±1/8 INCH (-D & -R: 2.00" MINIMUM) (-S: 2.50" MINIMUM)

* = AS OF 1/1/11, -S (SINGLE ENDED) AVAILABLE TO EXISTING CUSTOMERS ONLY, ALL OTHERS WILL BE ASP'S.


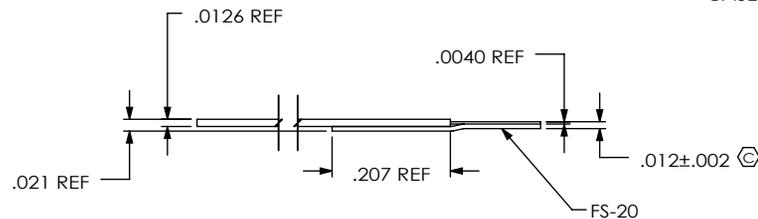


FIG 1
-S: SINGLE ENDED (FJH-10-S-XX-ST2 SHOWN)

TABLE 1		
No. OF POSITIONS	"A"	"B"
-6	.138	6
-10	.217	10
-15	.315	15
-20	.413	20
-24	.492	24
-25	.512	25
-30	.610	30
-40	.807	40
-43	.866	43
-50	1.004	50

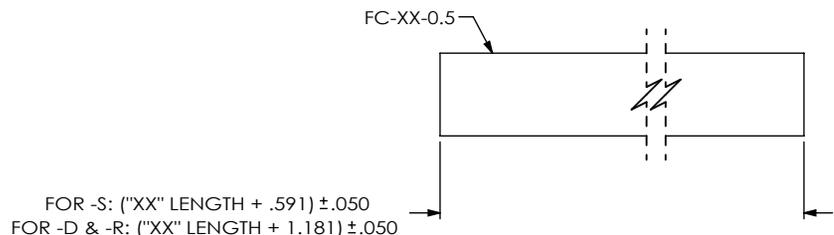

IN-PROCESS 1

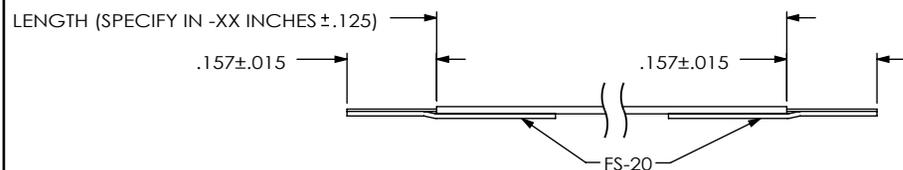


FIG 2
-D: DOUBLE ENDED (SAME AS FIG 1, UNLESS STATED)
(FIG 4 MAY BE SUBSTITUTED AT SAMTEC DISCRETION)


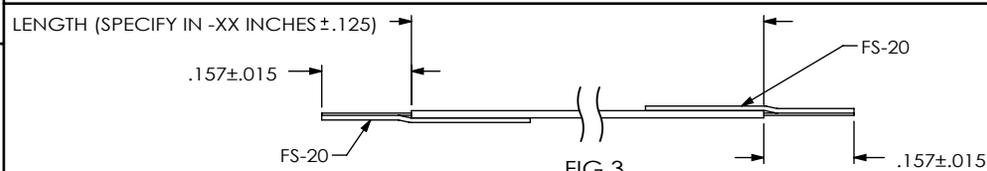


FIG 3
-R: REVERSE STIFFENER (SAME AS FIG 1, UNLESS STATED)
(FIG 5 MAY BE SUBSTITUTED AT SAMTEC DISCRETION)

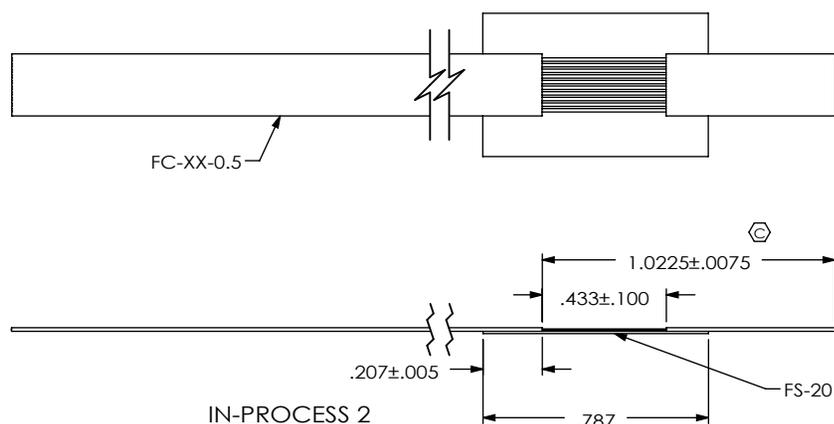

IN-PROCESS 2

(TYP ON BOTH ENDS FOR -D & -R STYLES, ONE END -S STYLE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE:
DECIMALS .XX: ±.01
.XXX: ±.005
.XXXX: ±.0020

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.

samtec
520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail info@SAMTEC.com code 5332

MATERIAL: DO NOT SCALE DRAWING SHEET SCALE: 3:1
CONDUCTORS: TIN PLATED COPPER SURFACE FINISH EITHER BRIGHT TIN (99.9% SN) OR MATTE TIN (95.5% SN, 3.5% AG, 1% CU)
INSULATION & STIFFENER: POLYESTER

DESCRIPTION: .5mm FLEX CABLE JUMPER
DWG. NO. FJH-XX-X-XX.XX-X
BY: KEVIN B 6/28/00 SHEET 1 OF 2

SHEET 2: MACHINE BUILT PRODUCT

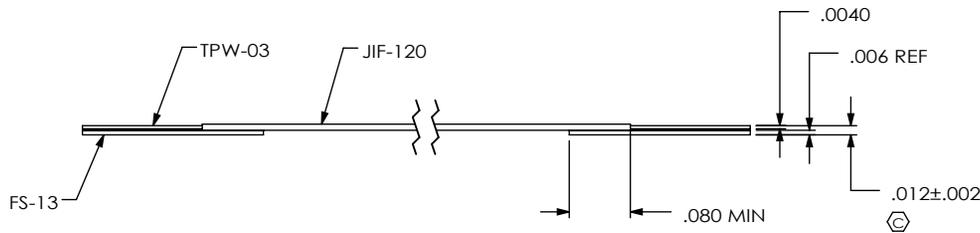
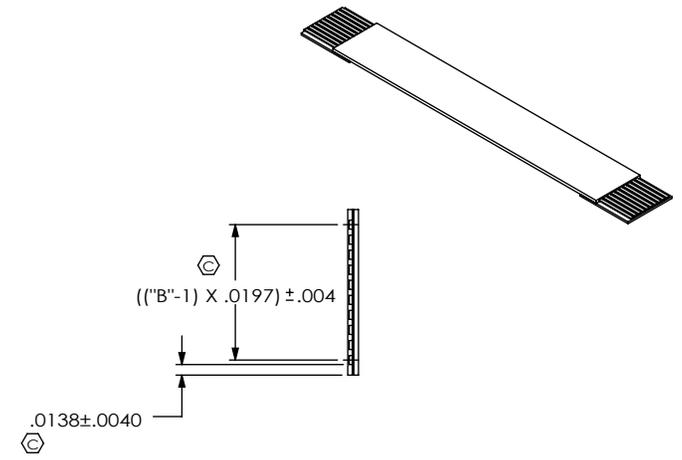
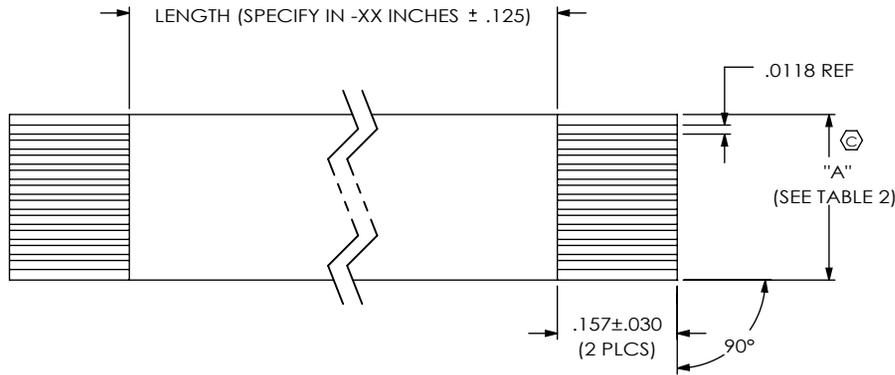


FIG 4
(-D=DOUBLE ENDED) (MACHINE BUILT)
(FJH-10-D-XX.XX-4 SHOWN)

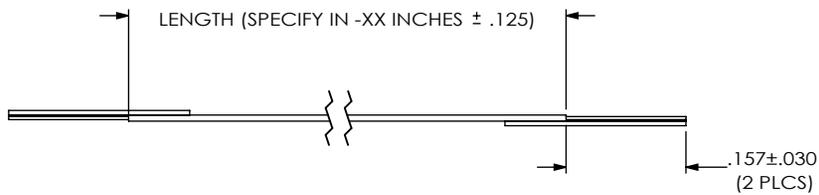


FIG 5
(-R= REVERSE STIFFENER) (MACHINE BUILT)
(SAME AS FIG 4 UNLESS STATED)

MATERIAL LENGTH (IN) PER CABLE	
TPW-03	(No. OF POSITIONS +2) x (LENGTH + .314)
FS-13	6.30 / No. OF CUT CABLES (SEE TABLE 3)
JIF-120	2 x (LENGTH + .314) / No. OF CUT CABLES (SEE TABLE 3)

TABLE 2		
No. OF POSITIONS	"A"	"B"
-6	.1378	6
-10	.2166	10
-15	.3150	15
-20	.4134	20
-24	.4922	24
-25	.5118	25
-30	.6103	30
-40	.8071	40
-43	.8662	43
-50	1.0040	50

TABLE 3	
No. OF POSITIONS	"No. OF CUT CABLES"
-6	7
-10	7
-15	5
-20	3
-24	3
-25	3
-30	2
-40	1
-43	1
-50	1

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING
SHEET SCALE: 3:1



520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail info@SAMTEC.com code 55322

DESCRIPTION:
.5mm FLEX CABLE JUMPER

DWG. NO.
FJH-XX-X-XX.XX-X

BY: KEVIN B 6/28/00 SHEET 2 OF 2