BUSSMANN SERIES

FNQ 13/32" x 1-1/2" 500Vac time-delay supplemental fuses





500Vac 1/10 to 30A

Catalog symbol / color code:

• FNQ - Orange (500Vac maximum voltage)

Description:

Bussmann® series time-delay FNQ supplemental fuses. For superior protection, upgrade to FNQ-R Class CC fuses. See data sheet no. 1014.

Specifications:

Ratings

Fuse Amp	Interrupting Rating at Rated Voltage	Agency Information	
Range	500Vac	UL	CSA
1/10 to 30	10kA	Χ	Χ

Agency information


- UL® Listed, Std. 248-14, Guide JDYX, File E19180
- CSA® Certified: C22.2 No. 248.14, Class 1422-01, File 53787, HRC-MISC
- . CF
- · RoHS compliant*
- * FNQ-1/8 not RoHS compliant.

Catalog num	bers (amps)		
FNQ-1/10	FNQ-8/10	FNQ-3-2/10	FNQ-9
FNQ-1/8	FNQ-1	FNQ-3-1/2	FNQ-10
FNQ-15/100	FNQ-1-1/8	FNQ-4	FNQ-12
FNQ-3/16	FNQ-1-1/4	FNQ-4-1/2	FNQ-14
FNQ-2/10	FNQ-1-1/2	FNQ-5	FNQ-15
FNQ-1/4	FNQ-1-6/10	FNQ-5-6/10	FNQ-20
FNQ-3/10	FNQ-2	FNQ-6	FNQ-25
FNQ-4/10	FNQ-2-1/4	FNQ-6-1/4	FNQ-30
FNQ-1/2	FNQ-2-1/2	FNQ-7	
FNQ-6/10	FNQ-3	FNQ-8	

Carton quantity

Amps	Qty.
1/10 to 30	10

Dimensions - in (mm)



Features

- · Color coded for 500Vac maximum voltage rating
- · Fiber tube construction
- · Nickel-plated brass endcaps

Typical applications


- · Motor control transformers
- · Circuits with in-rush currents.

Recommended fuse blocks/fuse holders

Catalog symbol	Description	Data sheet no.#		
Blocks				
ВММ	1-, 2- and 3-pole modular blocks with optional covers	10235		
BM	1-, 2- and 3-pole blocks	1104		
DIN-rail holders / switches				
CCP30M	1-, 2- and 3-pole switch	1157		
CHM	1-, 2- and 3-pole	3185		
Optima NG	3-Pole protection module	1109		
Optima	3-Pole holder	1102		
Optima	3-Pole holder + switch	1103		
Panel mount hold	ers			
HPM and HPM-D	1-Pole holder	2112		
HPC-D	1-Pole holder	2109		
HPS2	2-Pole holder	2140		
HPF, HPF-C and HPF-WT	1-Pole holder	2114		
HPS	1-Pole holder	2113		
HPG and HPD	1-Pole holder	2108		
In-line holders				
HEB	1-Pole holder	2127		
HEX	2-Pole holder	2126		
Fuseclips				
1A3400, 5956 and 5960	PCB fuseclips	2132		
Fuse covers				
SAMI-7	Finger-safe fuse cover	1204		



Time-current characteristic curves - average melt

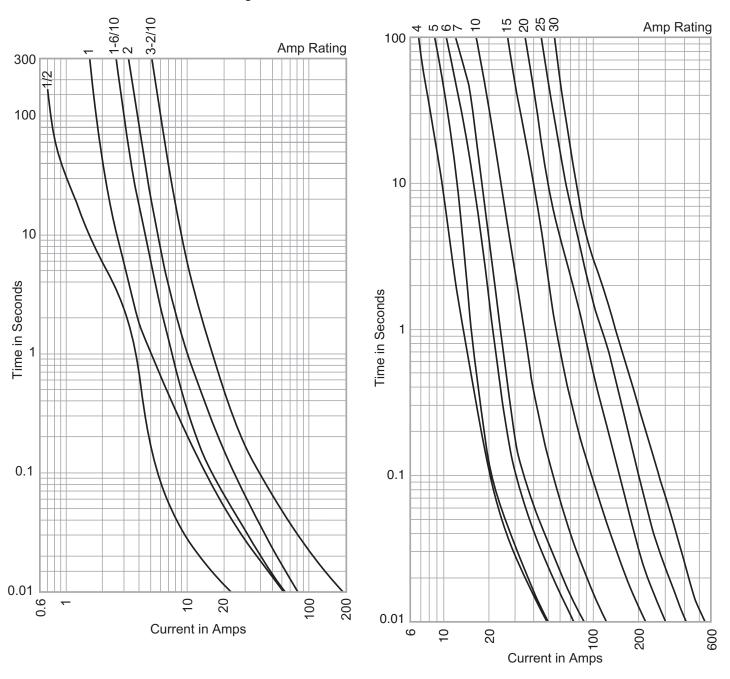

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Eaton 1000 Eaton Boulevard Cleveland, OH 44122 Eaton.com

Bussmann Division 114 Old State Road Ellisville, MO 63021 United States Eaton.com/bussmannseries

© 2016 Eaton All Rights Reserved Printed in USA Publication No. 1012 — BU-SB14286 February 2016

Eaton and Bussmann are valuable trademarks of Eaton in the U.S. and other countries. You are not permitted to use the Eaton trademarks without prior written consent of Eaton.

UL is a registered trademark of the Underwriters Laboratories, Inc. CSA is a registered trademark of the Canadian Standards Group.

For Eaton's Bussmann series product information, call 1-855-287-7626 or visit: Eaton.com/bussmannseries

Follow us on social media to get the latest product and support information.













Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cooper Bussmann:

FNQ-1-1/2 FNQ-7 FNQ-4 FNQ-1-6/10 FNQ-2/10 FNQ-25 FNQ-1

Eaton:

FNQ-10 FNQ-8/10 FNQ-3/16 FNQ-4/10 FNQ-2 FNQ-9 FNQ-2-1/4 FNQ-1/8 FNQ-4-1/2 FNQ-2-1/2 FNQ-3/10 FNQ-15 FNQ-1-1/4 FNQ-5 FNQ-20 FNQ-6-1/4 FNQ-1/4 FNQ-14 FNQ-5-6/10 FNQ-6/10 FNQ-3-2/10 FNQ-12 FNQ-30 FNQ-8 FNQ-1-1/8 FNQ-15/100 FNQ-6 FNQ-3-1/2 FNQ-1/10