

**PCS Free receptacle with cable crimping**

Part number	Cable group	Dim. L	Note
PCS.00.250.CTME24	1	30	○
PCS.00.250.CTME30	2	30	○
PCS.00.250.CTME31	3-4	30	○
PCS.00.250.CTME35	8	30	○
PCS.00.250.CTME44	5	30	○
PCS.00.250.CTME52	6	33	○

Note: the strain relief must be ordered separately (see page 29).

M4 Cable assembly, crimp contact – see page 35


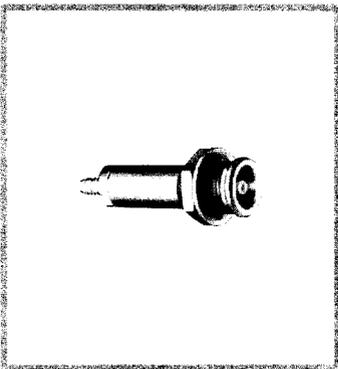
M5 Cable assembly, solder contact (on request) – see page 35

**PSA Fixed receptacle, nut fixing, with cable collet**

Part number	Cable group	Note
PSA.00.250.CTLC22	1	●
PSA.00.250.CTLC29	2-3-4	●
PSA.00.250.CTLC31	8	●

M1 Cable assembly – see page 34

P5 Panel cut-out – see page 33

**PSS Fixed receptacle, nut fixing, with cable crimping**



Part number	Cable group	Note
PSS.00.250.CTME24	1	○
PSS.00.250.CTME30	2	○
PSS.00.250.CTME31	3-4	○
PSS.00.250.CTME35	8	○

Note: the strain relief must be ordered separately (see page 29).

M4 Cable assembly, crimp contact – see page 35

M5 Cable assembly, solder contact (on request) – see page 36

P5 Panel cut-out – see page 33

**PES Fixed receptacle, nut fixing, with cable crimping (back panel mounting)**



Part number	Cable group	Note
PES.00.250.NTME31	3-4	○
PES.00.250.NTME35	8	○

Note: the strain relief must be ordered separately (see page 29).

M4 Cable assembly, crimp contact – see page 35

M5 Cable assembly, solder contact (on request) – see page 36

P5 Panel cut-out – see page 33

**FRT Straight plug with resistor or shorted**

Part number	Resistor	Weight (g)	Note
FRT.00.250.CTA00	shorted	4.4	○
FRT.00.250.CTA50	50 Ω 1/8W	4.4	●

● Available ○ On request