



[My Cart](#) | [My Part Lists](#) | [Sign In/Register](#)

[English \(Change\)](#)

Have a Question?
Chat with a Product
Information Specialist

What can we help you find?

[Products](#) [Industries](#) [Resources](#) [About TE](#) [My Account](#) [Innovation](#) [Support Center](#)

2-1617019-3 Product Details



[Share](#)



[Print](#)



[Email](#)

Detailed product features are not currently available online.

Product features can often be found by referring to the available documents. [Contact us](#) for information about this product.

No Image Available

FW1109G06 = M5757/10-035
[Not EU RoHS or ELV Compliant](#)

Quick Links

- [Pricing & Availability](#)
- [Search for Tooling](#)
- [Contact Us About This Product](#)

2-1617019-3

(FW1109G06)

TE Internal Number: 2-
1617019-3

Active

[Add to My Part List](#)

[Buy Product](#)

Documentation & Additional Information

Product Drawings:

- None Available

Catalog Pages/Data Sheets:

- [RELAY](#) (PDF, English)

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files:

- None Available

[List all Documents](#)

Related Products:

- [Tooling](#)

Corporate Information

[About TE](#)
[Investors](#)
[News Room](#)
[Supplier Portal](#)
[Careers](#)
[Terms & Conditions](#)
[Privacy Policy](#)

Quick Links


[Distributor Inventory](#)
[Product Cross Reference](#)
[Documents & Drawings](#)
[Product Compliance Support Center](#)
[Site Map](#)

Customer Support

[Email or Chat With Us](#)
[Find a Phone Number](#)
[Knowledge Base](#)
[Manage Your Account](#)

Keep Me Informed



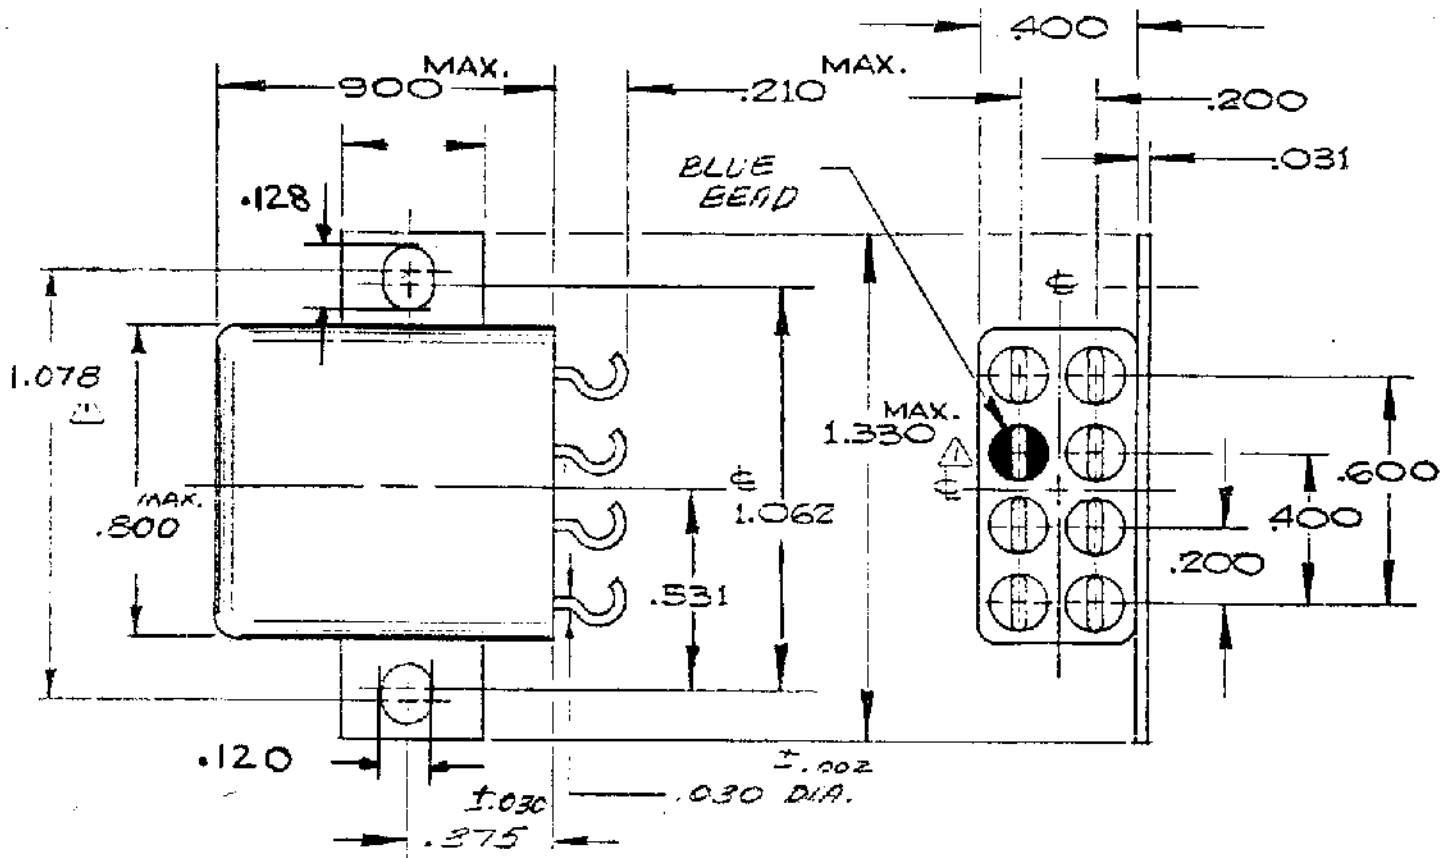

CUSTOMER DATA SHEET

COIL: @ +25°C 26.5VDC NOMINAL

TOLERANCE UNLESS OTHERWISE SPECIFIED
DECIMALS ±.005 FRACTIONAL ± 1/64

WINDING # 1

WINDING # 2

675 OHMS

OHMS

13.5V MUST OPERATE

MUST OPERATE

26.5 VDC NOMINAL


ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 5MS MAX
CONTACT BOUNCE 1MS MAX

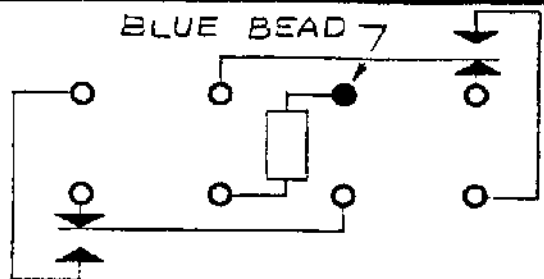

CONTACT RATING: LOW LEVEL TO
2 AMPS @ 28 VDC RESISTIVE
100,000 OPERATIONS.

DR. 4-16-85

CK. OSW



Communications
Instruments, Inc.

CUST. QPL

CUST. NO. M5757/10-035

TYPE "FW" RELAY

FW 1109G06