
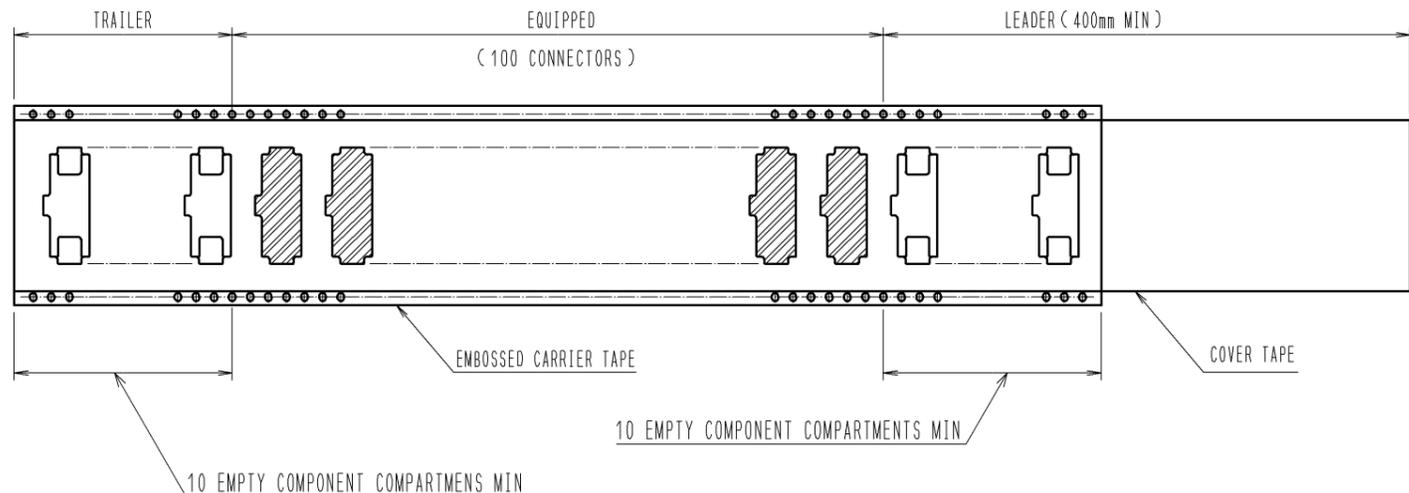
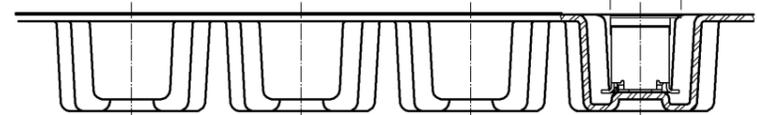
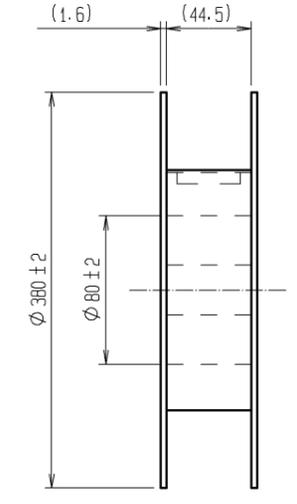
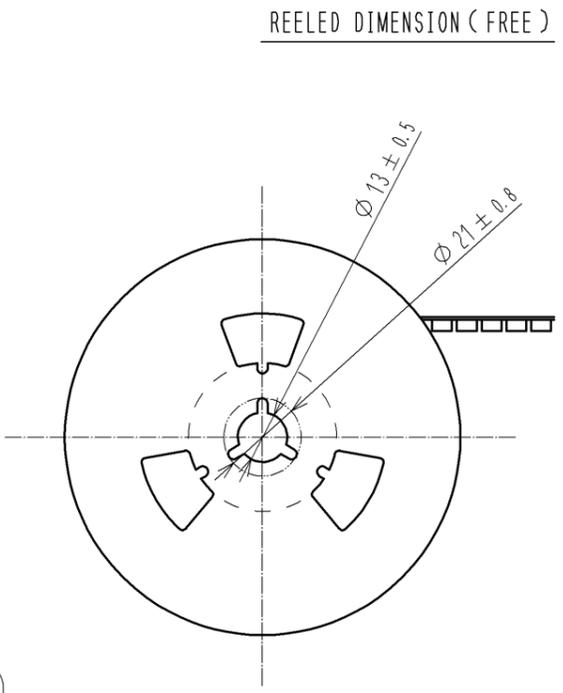
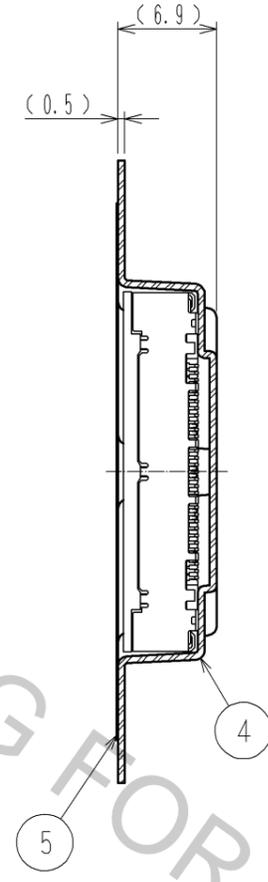
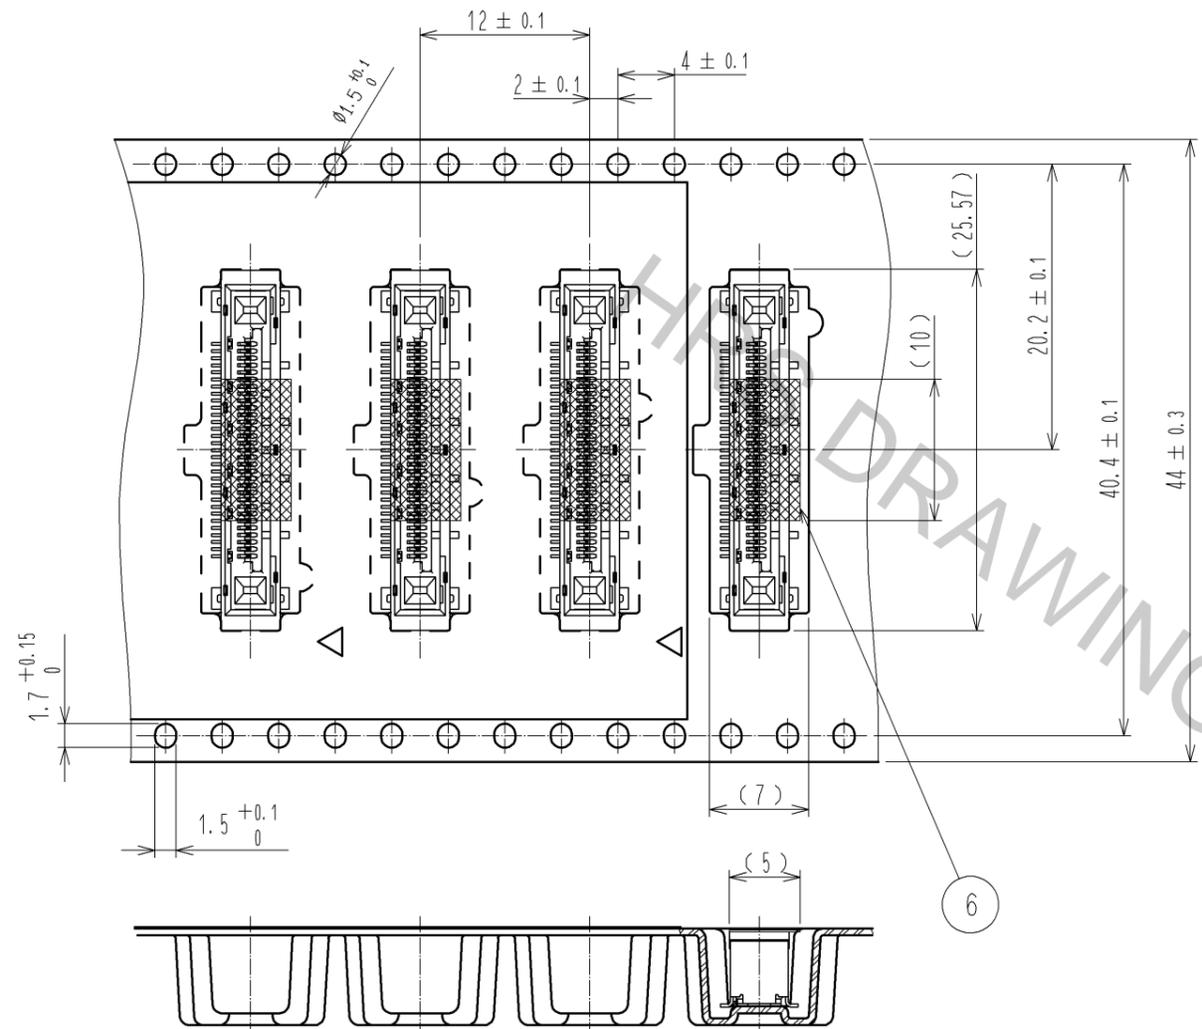


NOTE 1 LEAD CO-PLANARITY OF THIS PRODUCT TO BE 0.1MAX.
 2 AREA OF INNER SMT LAND REQUIRES PATTERN PROHIBITION OR RESIST TREATMENT TO PREVENT THE PATTERN TOUCHING TO THE CONTACTS.
 3 () INDICATES A REFERENCE DIMENSION.
 4 MANUFACTURING PROCESS COULD LEAVE SCRATCH AND/OR PUNCH MARKS HAVING NO AFFECT ON THE PRODUCT PERFORMANCE.
 5 PACKAGING FOR THIS PRODUCT APPLIES EMBOSSED CARRIER TAPE PACKAGING. SEE SHEET 2/2 FOR DETAILS.

3	PHOSPHOR BRONZE	CONTACT AREA : GOLD $0.1 \mu\text{m}$ min LEAD AREA : GOLD $0.03 \mu\text{m}$ min UNDER PLATING : NICKEL $1 \mu\text{m}$ min	6	PI	(TAPE FOR VACUUM PICK UP)
1	LCP	BLACK, UL94V-0	5	PE	(COVER TAPE)
			4	PS	(EMBOSSED CARRIER TAPE)
			2	PHOSPHOR BRONZE	OVER PLATING : TIN PLATING $1 \mu\text{m}$ min UNDER PLATING : NICKEL $0.2 \mu\text{m}$ min
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
UNITS mm		SCALE 5 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA 11.09.15	DRAWING NO. EDC3-157330-02		
		CHECED : HT. YAMAGUCHI 11.09.15	PART NO. FX16-31S-0.5SV(30)		
		DESIGNED : TS. MIYAKI 11.09.15	CODE NO. CL575-3402-4-30		
		DRAWN : TS. MIYAKI 11.09.15	DATE		

DRAWING FOR PACKING (2:1)

THE DIRECITON OF PULLING OUT



HRS	DRAWING NO.	EDC3-157330-02	△ 2/2
	PART NO.	FX16-31S-0.5SV<30>	
	CODE NO.	CL575-3402-4-30	

Oct.1.2016 Copyright 2016 HIROSE ELECTRIC CO., LTD. All Rights Reserved.