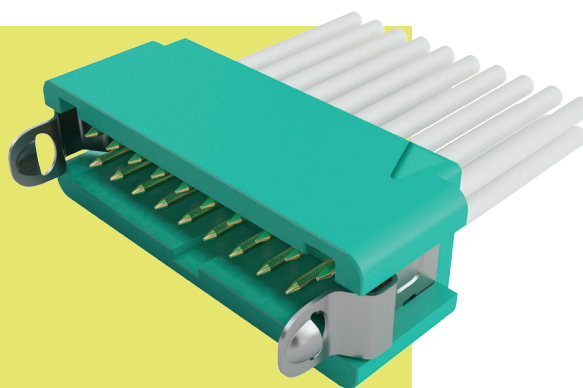


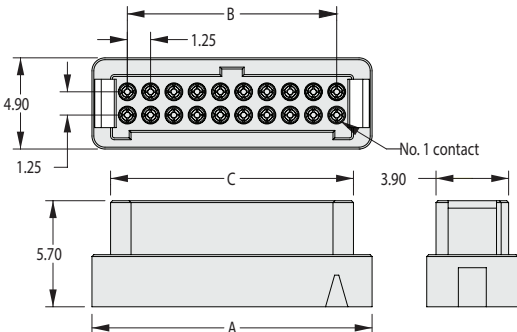
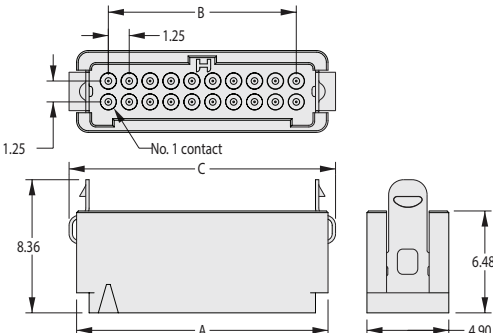
Gecko Connectors

Crimp Housings

- ❖ Features potting wall for extra security.
- ❖ No. 1 position identified on moulding.
- ❖ Withstands extremes of temperature: -65°C to +150°C.
- ❖ 3 polarising points on each housing prevent mis-mating.
- ❖ Easy to release latches require no tooling.



GECKO

FEMALE		CALCULATION		MALE		CALCULATION	
		A	B + 3.8			A	B + 3.8
		B	0.625 x (Total No. of Contacts - 2)			B	0.625 x (Total No. of Contacts - 2)
		C	B + 1.8			C	B + 5.2
							

TOOLS	
Recommended Crimp Tool – Z125-900 Positioner – Z125-901	Contact Insertion/Removal Tool – Z125-902 See page 12 ❖ Instruction sheets available at www.harwin.com/instructions

HOW TO ORDER																		
SERIES CODE <table><tr><th>TYPE</th><td></td></tr><tr><td>204</td><td>Female Housing</td></tr><tr><td>304</td><td>Male Housing</td></tr></table>		TYPE		204	Female Housing	304	Male Housing	G125 - XXX XX 96 XX LATCHES <table><tr><td>L0</td><td>No Latches</td></tr><tr><td>L4</td><td>Latches (Male Only)</td></tr></table> FINISH <table><tr><td>96</td><td>Housing</td><td>Pb</td></tr></table> TOTAL NO. OF CONTACTS <table><tr><td>06, 10, 12, 16, 20, 26, 34, 50</td><td>Housing</td></tr></table>		L0	No Latches	L4	Latches (Male Only)	96	Housing	Pb	06, 10, 12, 16, 20, 26, 34, 50	Housing
TYPE																		
204	Female Housing																	
304	Male Housing																	
L0	No Latches																	
L4	Latches (Male Only)																	
96	Housing	Pb																
06, 10, 12, 16, 20, 26, 34, 50	Housing																	

All dimensions in mm.

Patent Published