


Double-pole Relays Ideal for Audio Speaker Protection and Power Switching

- Slim DPST-NO relay: 24.5 × 13 × 25 mm (L × W × H).
- Standard models meet UL TV-4 and have a high capacity for switching (1,250 VA).
- Single-crossbar contact models available for high reliability.
- Double-insulation construction ensures high insulation performance. (Clearance and creepage of 6.0 mm min. and 10-kV impulse withstand voltage between coil and contacts.)
- Conforms to UL508, CSA 22.2, EN60065 (SEMKO approval), and EN60255 (TÜV approval).

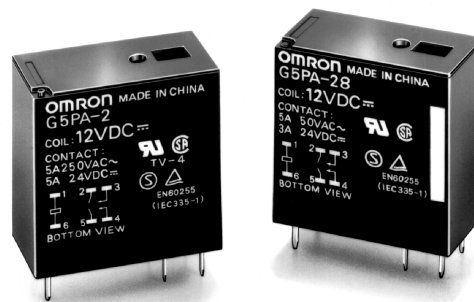

RCSE

Ordering Information

Classification	Contact form	Enclosure ratings	Model
Standard	DPST-NO	Flux protection	G5PA-2
Single-crossbar contact			G5PA-28

Note: When ordering, add the rated coil voltage to the model number.

Example: G5PA-2 12 VDC

Rated coil voltage

Model Number Legend

G5PA- j j j VDC
1 2 3

1. Number of Poles

2: 2 poles (DPST-NO)

2. Classification

None: Standard

8: Single-crossbar contact

3. Rated Coil Voltage

12, 24 VDC

Specifications

■ Coil Ratings

Rated voltage	12 VDC	24 VDC
Rated current	44.2 mA	22.1 mA
Coil resistance	272 Ω	1,087 Ω
Must operate voltage	70% of rated voltage max.	
Must release voltage	5% of rated voltage min.	
Max. permissible voltage	110% of rated voltage	
Power consumption	Approx. 530 mW	

■ Contact Ratings

Item	G5PA-2	G5PA-28
Rated load	5 A at 250 VAC; 5 A at 24 VDC, resistive load ($\cos\phi = 1$)	5 A at 50 VAC; 3 A at 24 VDC, resistive load ($\cos\phi = 1$)
Rated carry current	5 A	
Max. switching voltage	250 VAC, 24 VDC	50 VAC, 24 VDC
Max. switching current	5 A	
Max. switching power	1,250 VA, 120 W	250 VA, 72 W

Note: P level: $\lambda_{60}=0.1 \times 10^{-6}$ operations (with an operating frequency of 120 operations/min)

■ Characteristics

Item	G5PA-2	G5PA-28
Contact resistance	100 mΩ max.	50 mΩ max.
Operate time	15 ms max.	
Release time	5 ms max.	
Insulation resistance	1,000 MΩ min. (at 500 VDC)	
Dielectric strength	4,000 VAC 50/60 Hz for 1 min between coil and contacts 1,000 VAC 50/60 Hz for 1 min between contacts of same polarity 2,000 VAC 50/60 Hz for 1 min between contacts of different polarity	
Impulse withstand voltage	10,000 V (1.2 x 50 μs) between coil and contacts	
Vibration resistance	Destruction: 10 to 55 Hz, 1.5-mm double amplitude Malfunction: 10 to 55 Hz, 1.5-mm double amplitude	
Shock resistance	Destruction: 1,000 m/s ² Malfunction: 100 m/s ²	
Life expectancy	Mechanical: 500,000 operations min.	
	Electrical: 100,000 operations min.	50,000 operations min.
Ambient temperature	Operating: -25°C to 70°C (with no icing)	
Ambient humidity	Operating: 35% to 85%	
Weight	Approx. 15 g	

■ Approved Standards

UL508 (File No. 41515)/CSA 22.2 No. 14 (File No. LR31928)

Model	Coil ratings	Contact ratings
G5PA-2	5, 6, 12, 24 VDC	5 A, 250 VAC (resistive load) 5 A, 120 VAC (resistive load) 5 A, 24 VDC (resistive load) TV-4
G5PA-28		5 A, 50 VAC (resistive load) 3 A, 24 VDC (resistive load) 500 W, 120 VAC Tungsten

SEMKO (File No. 9737033/9851138)

Model	Coil ratings	Contact ratings
G5PA-2	5 to 24 VDC	5 A/40 A, 250 VAC
G5PA-28		5 A, 50 VAC

TÜV EN60255 (File No. R9750961)

Model	Coil ratings	Contact ratings
G5PA-2	5, 6, 12, 24 VDC	5 A, 120 VAC ($\cos\phi = 1$) 5 A, 24 VDC (L/R = 0 ms)
G5PA-28		5 A, 50 VAC ($\cos\phi = 1$) 3 A, 24 VDC (L/R = 0 ms)



Reference Data

Simulative load of power supply		
G5PA-2	Electrical life expectancy:	25,000 operations
	Rated load:	3 A at 50 VAC
	Inrush current:	40 A (O-P) with 4,700- μ s capacitor
	Operating frequency:	1,800 operations/hour
Breaking ability for DC voltage		
G5PA-28	Combination of voltage and resistance to break 20 operations	
	4 Ω at 45 VDC 6 Ω or 8 Ω at 50 VDC 8 Ω at 55 VDC	

Dimensions

Note: All units are in millimeters unless otherwise indicated.



G5PA-2

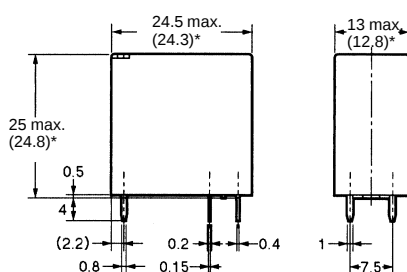



* Average value

Mounting Holes
(Bottom View)

Tolerances: ± 0.1 mm.

Terminal Arrangement/
Internal Connections
(Bottom View)



G5PA-28

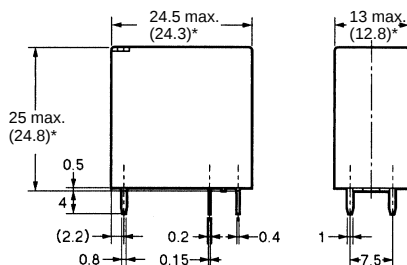

* Average value

Mounting Holes
(Bottom View)

Tolerances: ± 0.1 mm.

Terminal Arrangement/
Internal Connections
(Bottom View)

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Omron:

[G5PA-2 DC12](#) [G5PA-2 DC24](#) [G5PA-28-MC DC12](#) [G5PA-28-MC DC24](#) [G5PA-2 DC9](#) [G5PA-2 DC5](#)