


Low Signal Relay

G6S

Surface Mount DPDT Relay

- High dielectric withstand voltage of 2,000 VAC between coil and contacts (standard type); 1,500 VAC between contacts of different polarity.
- Meets FCC Part 68 and Telcordia 2.5 kV surge withstand.
- Standard models conform to UL/CSA standards. BSI (EN60950) certified models available (-Y versions)
- Low power consumption of 140 mW (Non-latching)
- Available in through-hole and SMT terminals.
- Tape and reel or tube packaging.
- RoHS Compliant.

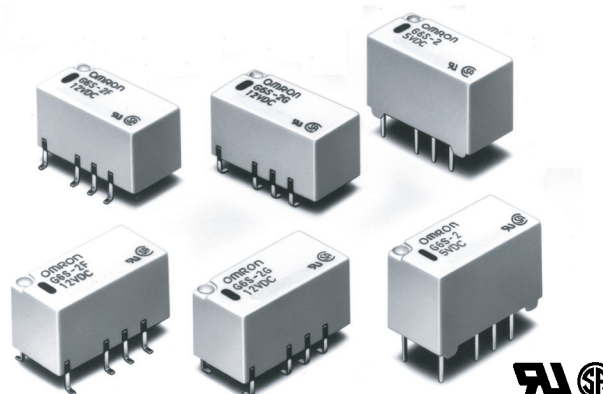

Ordering Information

■ Standard Version

Terminal	Model Contact form	Non-latching		Single coil latching	Dual coil latching
		Standard	European Version*		
Gull-wing	DPDT	G6S-2F	G6S-2F-Y	G6SU-2F	G6SK-2F
Inside "L"		G6S-2G	G6S-2G-Y	G6SU-2G	G6SK-2G
PCB through-hole		G6S-2	G6S-2-Y	G6SU-2	G6SK-2

* BSI certified for EN60950

Notes: 1. When ordering, add the rated coil voltage to the model number.

Example: G6S-2F DC12
Rated coil voltage

2. When ordering tape packing (surface mount models), add "-TR" to the model number.

Example: G6S-2F-TR DC12
Tape packing

"-TR" is not part of the relay model number. Therefore, it is not marked on the relay case.

3. Dual coil latching models are available with a High-sensitivity coil. (140 mW; 200 mW for DC24)
When ordering High-sensitivity dual coil latching models, add "-H" to the model number.

Example: G6SK-2G-H-TR DC5
High-sensitivity coil

Model Number Legend

G6S - - - DC
1 2 3 4 5 6

1. Relay Function

None: Non-latching
U: Single coil latching
K: Dual coil latching

3. Terminal Shape

None: Through-hole
F: Gull-wing surface mount
G: Inside "L" surface mount

5. Packaging

None: Tube packaging
TR: Tape and reel packaging
(Surface mount models)

2. Contact Form

2: DPDT

4. Approved Standards

None: UL, CSA
Y: UL, CSA, BSI (EN60950)
(Standard coil models - 5, 12, 24 VDC)

6. Rated Coil Voltage

3, 4.5, 5, 12, 24 VDC

Specification

■ Contact Data

Load	Resistive load (cos ϕ = 1)
Rated load	0.5 A at 125 VAC 2 A at 30 VDC
Contact type	Bifurcated crossbar
Contact material	Ag (Au-Alloy)
Max. carry current	2 A
Max. operating voltage	250 VAC, 220 VDC
Max. operating current	2 A
Max. switching capacity	62.5 VA, 60 W
Min. permissible load	10 μ A, 10 mVDC

Note: P level: $\lambda_{60} = 0.1 \times 10^{-6}$ /operation

This value was measured at a switching frequency of 120 operations/min and the criterion of contact resistance is 50 Ω . This value may vary depending on the operating environment. Always double-check relay suitability under actual operating conditions.

■ Coil Data

G6S - Standard Non-latching (G6S-2F, G6S-2G, G6S-2)

Rated voltage (VDC)	Rated current (mA)	Coil resistance (Ω)	Pick-up voltage	Dropout voltage	Maximum voltage	Power consumption (mW)
			% of rated voltage			
3	46.7	64.3	75% max.	10% min.	200% max. @ 23°C	Approx. 140
4.5	31.0	145				
5	28.1	178				
12	11.7	1,028				
24	8.3	2,880			170% max. @ 23°C	Approx. 200

G6SU - Standard Single Coil Latching (G6SU-2F, G6SU-2G, G6SU-2)

Rated voltage (VDC)	Rated current (mA)	Coil resistance (Ω)	Coil Inductance (H) (ref. value)		Set pick-up voltage	Reset pick-up voltage	Maximum voltage	Power consumption (mW)
			Armature OFF	Armature ON	% of rated voltage			
3	33.3	90	0.108	0.069	75% max.	75% max.	180% max. @ 23°C	Approx. 100
4.5	22.2	203	0.27	0.14				
5	20.0	250	0.36	0.18				
12	8.3	1,440	2.12	1.14				
24	6.3	3,840	5.80	3.79				Approx. 150

G6SK - Standard Dual Coil Latching (G6SK-2F, G6SK-2G, G6SK-2)

Rated voltage (VDC)	Rated current (mA)	Coil resistance (Ω)	Coil Inductance (H) (ref. value)				Set pick-up voltage	Reset pick-up voltage	Maximum voltage	Power consumption (mW)
			Set		Reset					
			Armature OFF	Armature ON	Armature OFF	Armature ON	% of rated voltage			
3	66.6	45	0.045	0.035	0.032	0.045	75% max.	75% max.	170% max. @ 23°C	Approx. 200
4.5	44.4	101	0.12	0.074	0.082	0.14				
5	40	125	0.14	0.088	0.098	0.16				
12	16.7	720	0.60	0.41	0.46	0.54				
24	12.5	1,920	1.98	1.23	1.34	2.23			140% max. @ 23°C	Approx. 300

G6S - European Version (EN60950 certified), Non-latching (G6S-2F-Y, G6S-2G-Y, G6S-2-Y)

Rated voltage (VDC)	Rated current (mA)	Coil resistance (Ω)	Pick-up voltage	Dropout voltage	Maximum voltage	Power consumption (mW)
			% of rated voltage			
5	40.0	125	75% max.	10% min.	170% max. @ 23°C	Approx. 200
12	16.7	720				
24	9.6	2,504				

Note: 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of $\pm 10\%$.

2. The operating characteristics are measured at a coil temperature of 23°C.

3. Pick-up voltage will vary with temperature.

4. The maximum voltage is the highest voltage that can be imposed on the relay coil.


■ Characteristics

Contact resistance (See note 1)		75 mΩ max.
Operate (set) time (See note 2)		4 ms max. (mean value approx. 2.5 ms G6S; 2.0 ms G6SU, G6SK)
Release (reset) time (See note 2)		4 ms max. (mean value approx. 1.5 ms G6S; 2.0 ms G6SU, G6SK)
Bounce time		Approx. 0.5 ms
Minimum set / reset pulse width		10 ms (latching models)
Max. operating frequency		Mechanical: 36,000 operations/hr Electrical: 1,800 ops/hr (under rated AC load). 1,200 ops/hr (under rated DC load)
Insulation resistance (See note 3)		1,000 MΩ min. (at 500 VDC)
Dielectric strength		2,000 VAC, 50/60 Hz for 1 minute (G6S, G6SU, G6S "-Y") between coil and contacts 1,000 VAC, 50/60 Hz for 1 minute (G6SK) between coil and contacts 1,500 VAC, 50/60 Hz for 1 minute between contacts of different and same polarity 500 VAC, 50/60 Hz for 1 minute between set and reset coils (G6SK)
Surge withstand voltage	Conforming to Telcordia specs.	2,500 V (2 x 10 μS) between coil and contacts for G6S, G6SU and G6S "-Y" 2,500 V (2 x 10 μS) between contacts of different poles
	Conforming to FCC Part 68	1,500 V (10 x 160 μS) between coil and contacts 1,500 V (10 x 160 μS) between contacts of different and same polarity
Vibration	Mechanical durability	10 to 55 Hz; 5 mm double amplitude
	Malfunction durability	10 to 55 Hz; 3.3 mm double amplitude
Shock	Mechanical durability	1,000 m/s ² ; approx. 100 G
	Malfunction durability	750 m/s ² ; approx. 75 G
Ambient temperature		-40 to +85°C with no icing or condensation -40 to +70°C with no icing or condensation (G6SK and G6S "-Y" with DC24 coil)
Ambient Humidity		5% to 85% RH
Service life	Mechanical	100,000,000 operations min. (at 36,000 operations/hour)
	Electrical	100,000 operations min. (2A@30VDC, resistive; 1,200 ops/hr.) 100,000 operations min. (0.5A@125VAC, resistive; 1,800 ops/hr.) See "Characteristic Data"
Weight		Approx. 2g


- Note:** 1. The contact resistance was measured with 10 mA at 1 VDC with a voltage drop method.
 2. Values in parentheses are typical values unless otherwise stated.
 3. The insulation resistance was measured with a 500-VDC megohmmeter applied to the same parts as those used for checking the dielectric strength (except between the set and reset coil).
 4. Data shown are of initial value.

■ Characteristic Data


Max. Switching Capacity




Service Life - G6S-2F(G)



Ambient Temperature vs. Maximum Voltage (non-Latching)




Ambient Temperature vs. Maximum Voltage (Latching)




Note: "Maximum Voltage" is the maximum voltage that can be applied to the relay coil


Ambient Temperature vs. Switching Current (non-Latching)




Ambient Temperature vs. Switching Current (Latching)




Ambient Temperature vs. Pickup or Drop out Voltage - G6S-2F(G)




Shock Malfunction - G6S-2F(G)

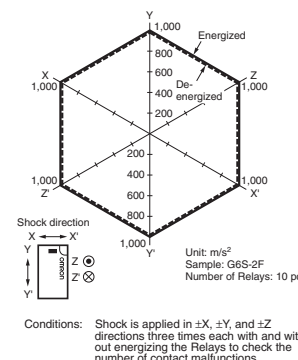


Electrical Endurance - G6S-2F(G) (Pickup and Dropout) *1




Electrical Endurance - G6S-2F(G) (Contact Resistance) *1




Electrical Endurance - G6S-2F(G) (Pickup and Dropout) *1




Electrical Endurance - G6S-2F(G) (Contact Resistance) *1




Contact Reliability Test - G6S-2F(G) (Contact Resistance) *1, *2



Pickup and Dropout- G6S-2F(G) Time Distribution *1




Distribution of Bounce Time G6S-2F(G) *1






*1. The tests were conducted at an ambient temperature of 23°C

*2. The contact resistance data are periodically measured reference values and are not values from each monitoring operation. Contact resistance values will vary according to the switching frequency and operating environment, so be sure to check operation under the actual operating conditions before use.


Mutual Magnetic Interference G6S-2F(G)




External Magnetic Interference G6S-2F(G)




Mutual Magnetic Interference G6S-2F(G)




High-frequency Characteristics Isolation - G6S-2F(G) *1, *2



High-frequency Characteristics Insertion Loss - G6S-2F(G) *1, *3



High-frequency Characteristics Return Loss, V.SWR - G6S-2F(G) *1, *3



*1. The tests were conducted at an ambient temperature of 23°C

*2. The contact resistance data are periodically measured reference values and are not values from each monitoring operation. Contact resistance values will vary according to the switching frequency and operating environment, so be sure to check operation under the actual operating conditions before use.

*3. High-frequency characteristics depend on the PCB to which the relay is mounted. Always check these characteristics, including durability, in the actual machine before use.


Dimensions

Note: 1. All units are in millimeters unless otherwise indicated.
2. Coplanarity of SMT versions is 0.1 mm max.


■ Standard

G6S-2F, G6S-2F-Y

Tolerance: ± 0.3 unless otherwise indicated

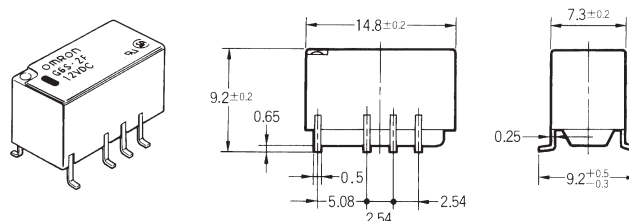


Terminal Arrangement/ Internal Connections (Top View)



Note: Carefully check the coil polarity of the relay


Footprint (Top View)

Tolerance: ± 0.1




G6S-2G, G6S-2G-Y

Tolerance: ± 0.3 unless otherwise indicated

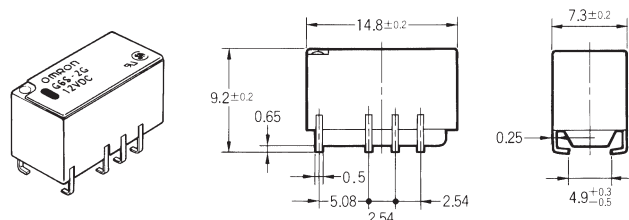


Terminal Arrangement/ Internal Connections (Top View)



Note: Carefully check the coil polarity of the relay


Footprint (Top View)

Tolerance: ± 0.1




G6S-2, G6S-2-Y

Tolerance: ± 0.3 unless otherwise indicated

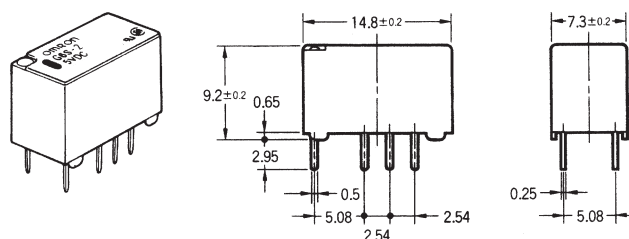


Terminal Arrangement/ Internal Connections (Bottom View)



Note: Carefully check the coil polarity of the relay




Footprint (Bottom View)




Single Coil Latching

G6SU-2F

Tolerance: ± 0.3 unless otherwise indicated




Terminal Arrangement/ Internal Connections (Top View)



Note: Carefully check the coil polarity of the relay




Footprint (Top View)

Tolerance: ± 0.1




G6SU-2G

Tolerance: ± 0.3 unless otherwise indicated




Terminal Arrangement/ Internal Connections (Top View)



Note: Carefully check the coil polarity of the relay




Footprint (Top View)

Tolerance: ± 0.1




G6SU-2

Tolerance: ± 0.3 unless otherwise indicated




Terminal Arrangement/ Internal Connections (Bottom View)



Note: Carefully check the coil polarity of the relay


Footprint (Bottom View)




Dual Coil Latching

G6SK-2F

Tolerance: ± 0.3 unless otherwise indicated

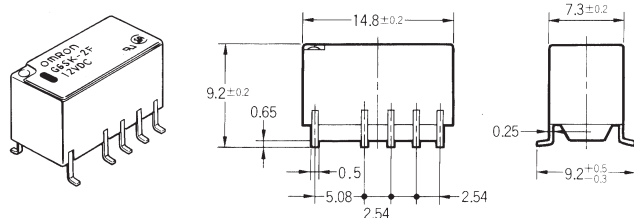


Terminal Arrangement/ Internal Connections (Top View)



Note: Carefully check the coil polarity of the relay


Footprint (Top View)

Tolerance: ± 0.1




G6SK-2G

Tolerance: ± 0.3 unless otherwise indicated

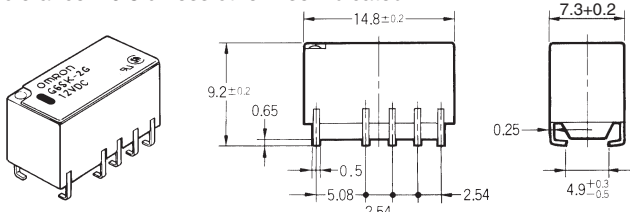


Terminal Arrangement/ Internal Connections (Top View)



Note: Carefully check the coil polarity of the relay


Footprint (Top View)

Tolerance: ± 0.1




G6SK-2

Tolerance: ± 0.3 unless otherwise indicated

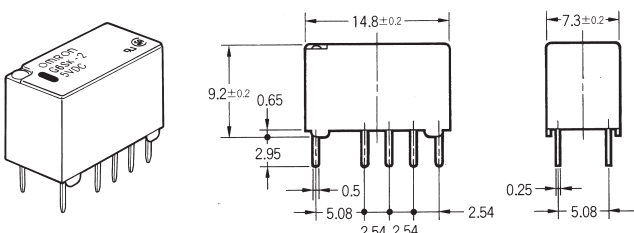


Terminal Arrangement/ Internal Connections (Bottom View)




Note: Carefully check the coil polarity of the relay

Footprint (Bottom View)




Recommended Soldering Method

(1) IRS Method (Mounting Solder: Lead)

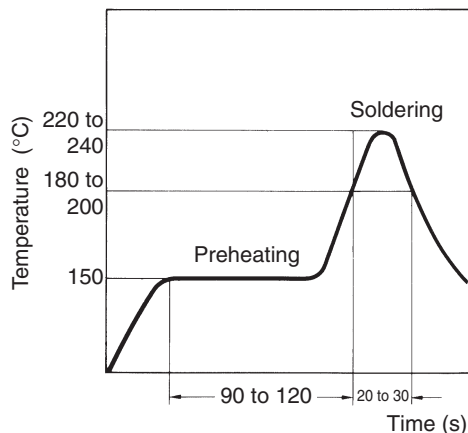

(2) IRS Method (Mounting Solder: Lead-free)

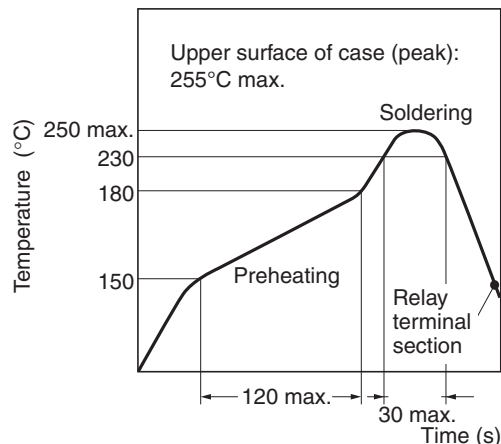


Note: The temperature profile indicates the temperature on the PCB.

Packaging



Tube packing	Standard nomenclature	50 pcs per anti-static tube
Tape packing (Surface mount versions)	When ordering, add "TR" before the rated coil voltage (e.g., G6S-2F-TR-DC12) Note: TR is not part of the relay model number and will not be marked on the relay.	

Tape and Reel Dimensions (Surface Mount Models)


- Relays per reel: 400
- Reels per packing carton: 2 (800 relays)

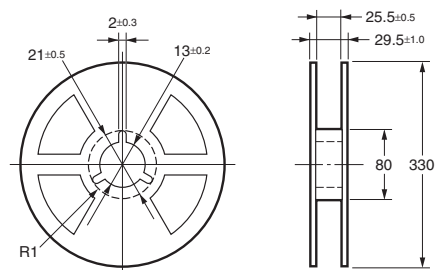

G6S-2F, G6SU-2F, G6SK-2F, G6S-2F-Y

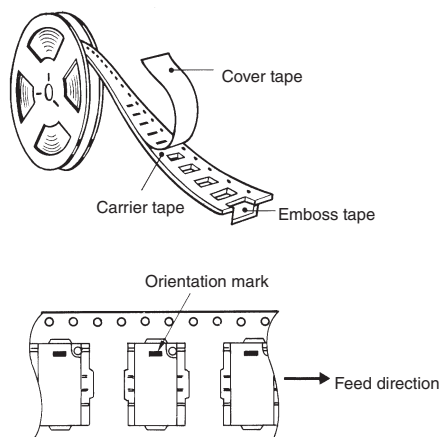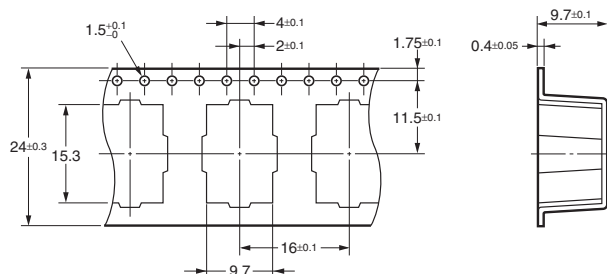

G6S-2G, G6SU-2G, G6SK-2G, G6S-2G-Y

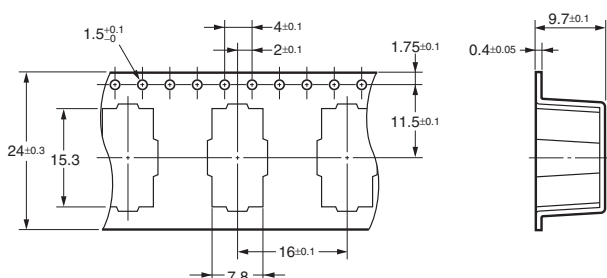

Approvals

UL Recognized (File No. E41515) / CSA Certified (File No. LR31928) - - Ambient Temp. = 40°C

Contact form	Coil rating	Contact ratings	Number of test operations
DPDT (2c)	2 to 48 VDC	3 A at 30 VDC (Resistive) 0.3 A at 110 VDC (Resistive) 0.5 A at 125 VAC (General Use)	6,000

BSI (EN60950) (File No.8064)

Contact form	Isolation Category	Voltage
DPDT	Supplementary Isolation	250 VAC

- Note:**
1. The rated values approved by each of the safety standards (e.g., UL, CSA and BSI) may be different from the performance characteristics individually defined in this catalog.
 2. In the interest of product improvement, specifications are subject to change.

Precautions

- Use a DC power supply with 5% or less ripple factor to operate the coil.
- Do not use the G6S where subject to strong external magnetic fields.
- Do not use the G6S where subject to magnetic particles or excessive amounts of dust.
- Do not reverse the polarity of the coil (+, -).

- Latching types are delivered in the reset position. We recommend that a reset voltage be applied in advance to start operation.
- Do not drop the G6S or otherwise subject it to excessive shock.
- Remove the relay from the packing immediately prior to usage.
- Be sure to read the precautions and information common to all relays, contained in the Technical User's Guide, "Electromechanical Relays, Technical Information" for correct use.

■ Correct use

Long-term Continuously ON Contacts

Using the Relay in a circuit where the Relay will be ON continuously for long periods (without switching) can lead to unstable contacts because the heat generated by the coil itself will affect the insulation, causing a film to develop on the contact surfaces. We recommend using a latching relay (magnetic-holding relay) in this kind of circuit. If a single-side stable model must be used in this kind of circuit, we recommend using a fail-safe circuit design that provides protection against contact failure or coil burnout.


Relay Handling

Use the Relay as soon as possible after opening the moisture-proof package. If the Relay is left for a long time after opening the moisture-proof package, the appearance may suffer and seal failure may occur after the solder mounting process. To store the Relay after opening the moisture-proof package, place it into the original package and sealed the package with adhesive tape.

When washing the product after soldering the Relay to a PCB, use a water-based solvent or alcohol-based solvent, and keep the solvent temperature to less than 40°C. Do not put the Relay in a cold cleaning bath immediately after soldering.

Claw Securing Force During Automatic Mounting

During automatic insertion of Relays, be sure to set the securing force of each claw to the following so that the Relay's characteristics will be maintained.



Dimension A: 1.96 N max.
Dimension B: 4.90 N max.
Dimension C: 1.96 N max.

G6S (K) (-U) -2 Soldering


- Soldering temperature: Approx. 250°C (At 260°C if the DWS method is used.)
- Soldering time: Approx. 5 s max. (Approx. 2 s for the first time and approx. 3 s for the second time if the DWS method is used.)
- Be sure to adjust the level of the molten solder so that the solder will not overflow onto the PCB.

G6S (K) (-U) -2F Soldering


The thickness of cream solder to be applied should be within a range between 150 μm and 200 μm on Omron's recommended PCB pattern.

In order to perform correct soldering, it is recommended that the correct soldering conditions be maintained as shown below on the left side.

Correct Soldering



Incorrect Soldering



Visually check that the relay is properly soldered.

All sales are subject to Omron Electronic Components LLC standard terms and conditions of sale, which can be found at http://www.components.omron.com/components/web/webfiles.nsf/sales_terms.html

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

OMRON
**OMRON ELECTRONIC
COMPONENTS LLC**
847-882-2288

OMRON ON-LINE

Global - <http://www.omron.com>

USA - <http://www.components.omron.com>

Cat. No. K093-E-07

05/14 (03/14)

Specifications subject to change without notice

Printed in USA

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Omron:

[G6S-2G-DC12](#) [G6SU-2-DC3](#) [G6SK-2F-DC5](#) [G6S-2G-Y-DC5](#) [G6S-2G-DC24](#) [G6SK-2F-DC12](#) [G6SK-2F-DC24](#)
[G6S-2F-DC24](#) [G6S-2F-DC12](#) [G6S-2G-DC5](#) [G6S-2-DC4.5](#) [G6S-2G-Y-TR-DC5](#) [G6S-2-DC24](#) [G6S-2F-DC5](#) [G6S-2-](#)
[DC12](#) [G6SU-2F-TR-DC3](#) [G6SK-2-H-DC5](#) [G6SU-2F-DC5](#) [G6S-2F-DC4.5](#) [G6SK-2-DC5](#) [G6SK-2F-TR-DC12](#) [G6SK-](#)
[2F-TR DC3](#) [G6S-2F-DC3](#) [G6S-2G-TR-DC24](#) [G6S-2-Y-DC12](#) [G6S-2-Y-DC4.5](#) [G6S-2-Y-DC5](#) [G6SK-2F-H-TR DC24](#)
[G6SU-2-DC12](#) [G6S-2 DC48](#) [G6S-2F DC48](#) [G6S-2F-TR DC9](#) [G6S-2F-Y-TR DC24](#) [G6S-2F-Y-TR DC4.5](#) [G6S-2F-Y-](#)
[TR DC5](#) [G6S-2F-Y-TR DC9](#) [G6S-2G DC48](#) [G6S-2G-TR DC12](#) [G6S-2G-TR DC3](#) [G6S-2G-TR DC4.5](#) [G6S-2G-TR](#)
[DC5](#) [G6S-2G-TR DC9](#) [G6S-2G-Y-TR DC12](#) [G6S-2G-Y-TR DC24](#) [G6S-2G-Y-TR DC4.5](#) [G6SK-2F-H-TR DC12](#)
[G6SK-2F-H-TR DC3](#) [G6SK-2F-H-TR DC5](#) [G6SK-2F-TR DC24](#) [G6SK-2F-TR DC4.5](#) [G6SK-2F-TR DC5](#) [G6SK-2G-H-](#)
[TR DC5](#) [G6SU-2F-TR DC24](#) [G6SU-2F-TR DC5](#) [G6SU-2G-TR DC4.5](#) [G6SU-2G-TR DC5](#) [G6SK-2F-H-TR DC4.5](#)
[G6S-2F-TR DC12](#) [G6S-2G-Y-TR DC9](#) [G6SK-2F DC4.5](#) [G6SK-2F-H-3 DC3](#) [G6SK-2F-H-TR DC2.4](#) [G6SK-2G DC4.5](#)
[G6SK-2G-H DC4.5](#) [G6SK-2G-TR DC4.5](#) [G6SK-2-H DC4.5](#) [G6SU-2 DC4.5](#) [G6SU-2F DC4.5](#) [G6SU-2F-TR DC12](#)
[G6SU-2F-TR DC4.5](#) [G6SU-2G DC4.5](#) [G6S-2 DC9](#) [G6S-2F-Y DC12](#) [G6S-2F-Y DC24](#) [G6S-2F-Y DC3](#) [G6S-2F-Y](#)
[DC4.5](#) [G6S-2F-Y DC6](#) [G6S-2F-Y DC9](#) [G6S-2G DC3](#) [G6S-2G DC4.5](#) [G6S-2G-Y DC12](#) [G6S-2G-Y DC24](#) [G6S-2G-Y](#)
[DC3](#) [G6S-2G-Y DC4.5](#) [G6S-2G-Y DC9](#) [G6S-2-Y DC24](#) [G6S-2-Y DC3](#) [G6S-2-Y DC6](#) [G6S-2-Y DC9](#) [G6SK-2 DC12](#)
[G6SK-2 DC24](#) [G6SK-2 DC3](#) [G6SK-2 DC6](#) [G6SK-2 DC9](#) [G6SK-2F DC3](#) [G6SK-2F DC6](#) [G6SK-2F DC9](#) [G6SK-2F-H](#)
[DC24](#) [G6SK-2F-H DC3](#) [G6SK-2F-H DC5](#)