

Glass Passivated Bridge Rectifiers

FEATURES

- Glass passivated junction
- Integrally molded heatsink provide very low thermal resistance for maximum heat dissipation
- Universal 4-way terminals: snap-on, wrap-around, solder or P.C. board mounting
- High surge current capability
- UL Recognized File # E-326243
- Compliant to RoHS Directive 2011/65/EU and in accordance to WEEE 2002/96/EC



GBPC40



GBPC40-M



MECHANICAL DATA

Case: GBPC40

Molding compound, UL flammability classification rating 94V-0

Terminal: Matte tin plated leads, solderable per JESD22-B102
Meet JESD 201 class 1A whisker test

Polarity: Polarity as marked on the body

Mounting torque: 20 in-lbs maximum

Weight: 17.3 g (approximately)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	005	01	02	04	06	08	10	UNIT
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current GBPC40 GBPC50	$I_{F(AV)}$				40 50				A
Peak forward surge current, 8.3 ms single half sine-wave superimposed on rated load	I_{FSM}				400				A
Maximum instantaneous forward voltage drop per element at specified current GBPC40 20 A GBPC50 25 A (Note 1)	V_F				1.1				V
Maximum reverse current @ Rated VR @ $T_J=25^\circ\text{C}$	I_R				10				μA
Typical thermal resistance	$R_{\theta JC}$				1.5				$^\circ\text{C/W}$
Operating junction temperature range	T_J				- 55 to +150				$^\circ\text{C}$
Storage temperature range	T_{STG}				- 55 to +150				$^\circ\text{C}$

Note 1: Pulse test with $PW=300\mu\text{s}$, 1% duty cycle

Note 2: Suffix "M" - Terminal Location Face to Face

ORDERING INFORMATION

PART NO.	PACKING CODE	PACKAGE	PACKING
GBPC**xx (Note 1)	T0	GBPC	Tray

Note 1: "*" defines current from 40A (GBPC40xx) to 50A (GBPC50xx),
"xx" defines voltage from 50V (GBPC**005) to 1000V (GBPC**10)

EXAMPLE

PREFERRED P/N	PART NO.	PACKING CODE	DESCRIPTION
GBPC4010 T0	GBPC4010	T0	

RATINGS AND CHARACTERISTICS CURVES

($T_A=25^\circ\text{C}$ unless otherwise noted)

FIG. 1- MAXIMUM FORWARD CURRENT DERATING CURVE

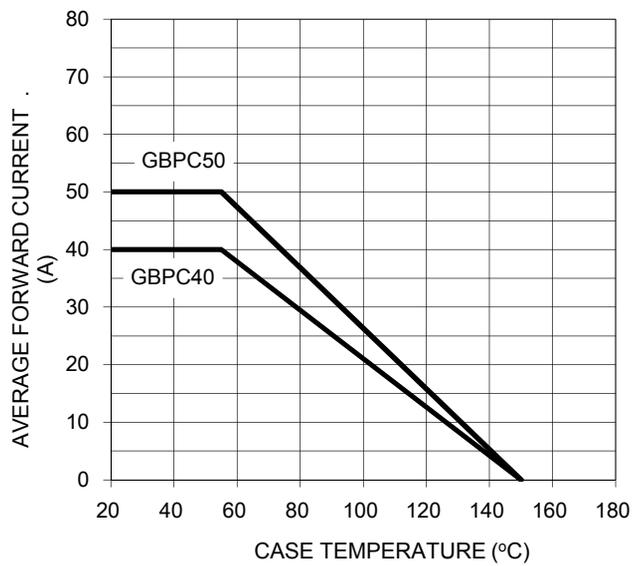


FIG. 2- TYPICAL REVERSE CHARACTERISTICS

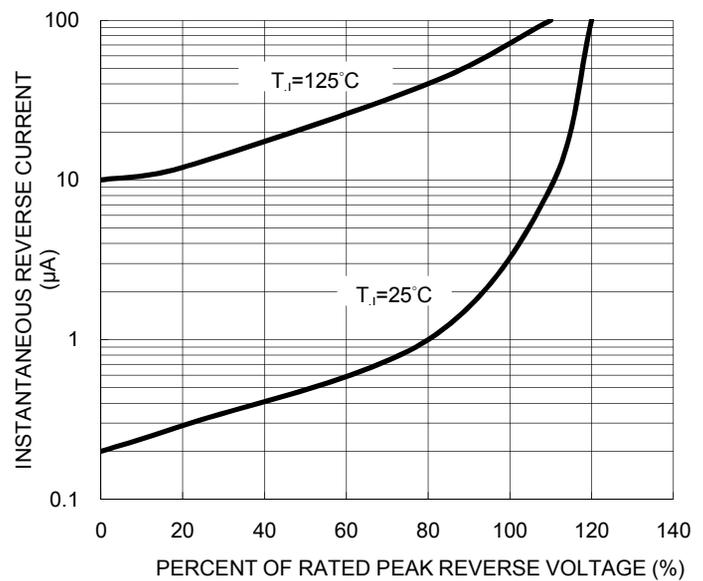


FIG. 3- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

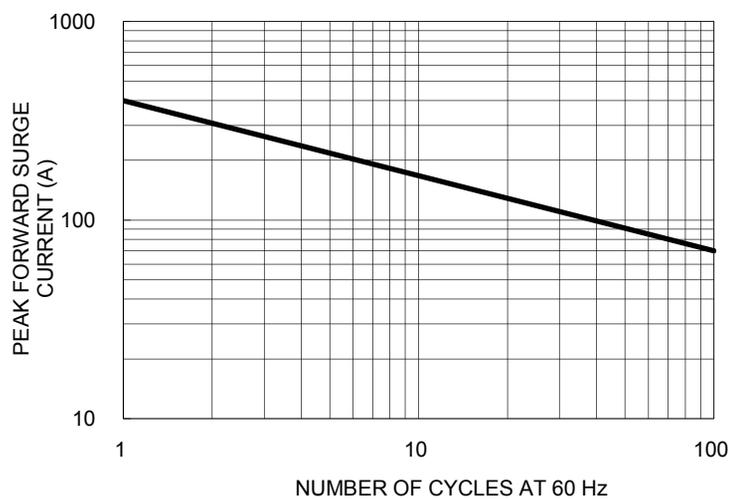


FIG. 4- TYPICAL FORWARD CHARACTERISTICS



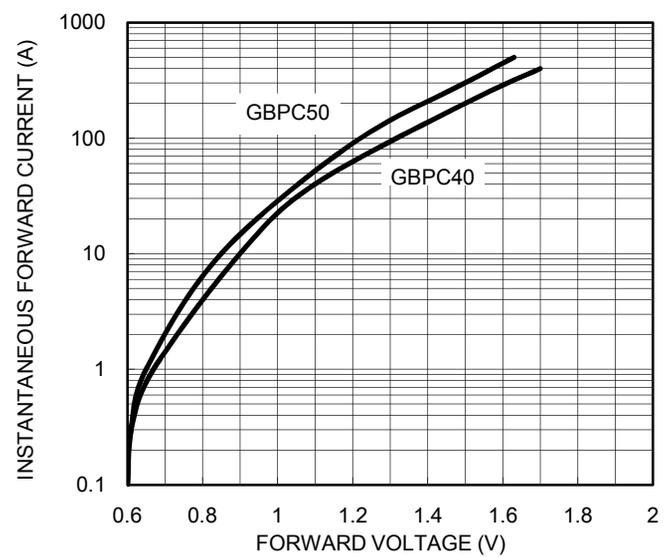



FIG. 5 TYPICAL JUNCTION CAPACITANCE

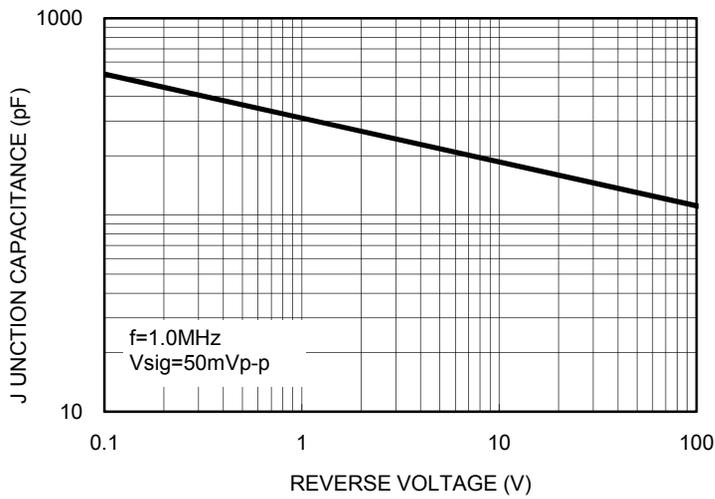

PACKAGE OUTLINE DIMENSIONS

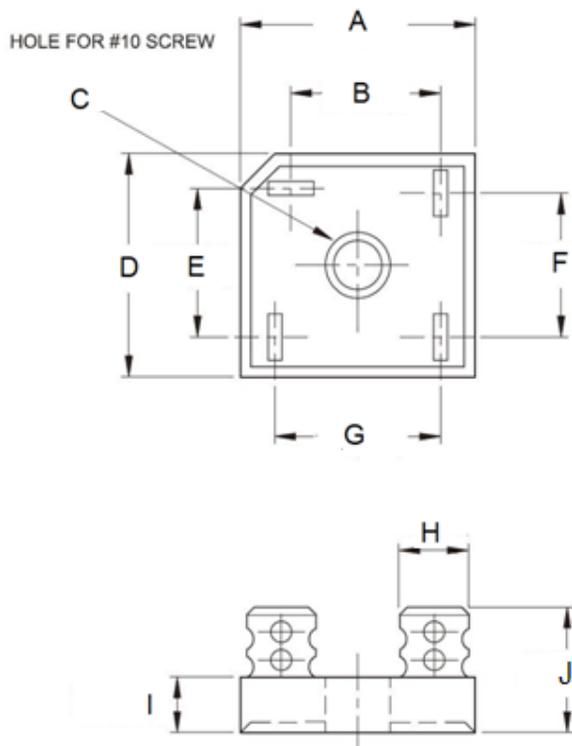

GBPC40				
DIM.	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	28.50	29.00	1.122	1.142
B	15.50	17.60	0.610	0.693
C	5.08	5.59	0.200	0.220
D	28.50	29.00	1.122	1.142
E	15.50	17.60	0.610	0.693
F	13.30	15.30	0.524	0.602
G	17.10	19.10	0.673	0.752
H	6.60 (TYP)		0.26 (TYP)	
I	7.36	7.87	0.290	0.310
J	21.26	24.57	0.837	0.967

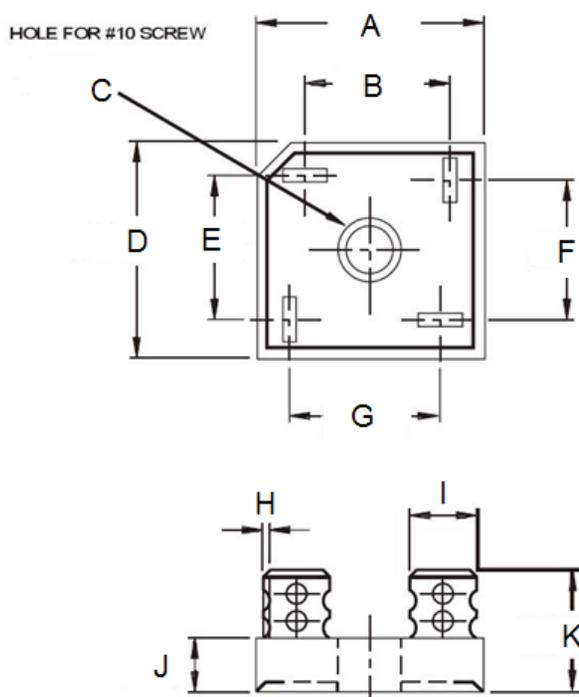

GBPC40-M				
DIM.	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	28.50	29.00	1.122	1.142
B	15.50	17.60	0.610	0.693
C	5.08	5.59	0.200	0.220
D	28.50	29.00	1.122	1.142
E	15.50	17.60	0.610	0.693
F	15.50	17.60	0.610	0.693
G	15.50	17.60	0.610	0.693
H	0.76	0.86	0.030	0.034
I	6.60 (TYP)		0.26 (TYP)	
J	7.36	7.87	0.290	0.310
K	21.26	24.57	0.837	0.967

MARKING DIAGRAM



P/N = Specific Device Code
YWW = Date Code
F = Factory Code

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Taiwan Semiconductor:

[GBPC4002](#) [GBPC4006](#) [GBPC4010](#) [GBPC4001](#) [GBPC4004](#) [GBPC4008](#) [GBPC40005](#) [GBPC40005M](#)
[GBPC4001M](#) [GBPC4002M](#) [GBPC4004M](#) [GBPC4006M](#) [GBPC4008M](#) [GBPC4010M](#) [GBPC50005](#) [GBPC50005M](#)
[GBPC5001](#) [GBPC5001M](#) [GBPC5002](#) [GBPC5002M](#) [GBPC5004](#) [GBPC5004M](#) [GBPC5006](#) [GBPC5006M](#)
[GBPC5008](#) [GBPC5008M](#) [GBPC5010](#) [GBPC5010M](#) [GBPC40005M T0](#) [GBPC40005 T0G](#) [GBPC40005M T0G](#)
[GBPC4001 T0G](#) [GBPC4001M T0](#) [GBPC5008 T0G](#) [GBPC5006 T0G](#) [GBPC4002M T0G](#) [GBPC4001M T0G](#)
[GBPC5010M T0G](#) [GBPC5004 T0G](#) [GBPC4002M T0](#) [GBPC4010 T0G](#) [GBPC4004 T0G](#) [GBPC4006M T0G](#)
[GBPC5001M T0G](#) [GBPC5001 T0G](#) [GBPC4004M T0G](#) [GBPC5008M T0G](#) [GBPC5004M T0G](#) [GBPC4006M T0](#)
[GBPC4002 T0G](#) [GBPC5006M T0G](#) [GBPC4010M T0G](#) [GBPC4008 T0G](#) [GBPC50005 T0G](#) [GBPC5006M T0](#)
[GBPC4008M T0G](#) [GBPC50005M T0G](#) [GBPC5002M T0G](#) [GBPC5010 T0G](#) [GBPC5002 T0G](#) [GBPC4010M T0](#)
[GBPC4006 T0G](#) [GBPC4004M T0](#) [GBPC5002M T0](#)