

**CUI INC**

9615 SW Allen, Suite 103
Beaverton, OR 97005
Phone: (503) 643-4899
800-275-4899
Fax: (503) 372-1266
Website: www.cui.com

Specifications

1	Part No.	GC0302M			
2	Nominal Size	30 mm.	inch		
3	Impedance	32 Ω $\pm$ 15%	at	1K Hz.	1 V.
4	Resonance	220 Hz. $\pm$ 44 Hz.	FO Hz.	1 V.	
5	S.P. Level	120 dB/w $\pm$ 3 dB	0.001 w.	1 cm.	average at
6	Response	fo Hz. $\sim$ 3K Hz. MAX 10dB	800, 1K, 1.2K, 1.5K Hz.		
7	Crossover Freq.	Hz.	Hz.	dB/OCT	Net work
8	Input Power	Nominal Input	0.03 w.	Handling Capacity	0.15 w.
9	Operation	Must be normal at program source			0.03 w.
10	Buzz, Rattle, etc.	Must be normal at sine wave			0.98 v.
11	Flux Density	Gauss $\pm$ 10%			
12	Total Flux	Max well min			
13	Magnet	Size	12.5 x 1.5 mm	gr	oz
14	Total Weight	gr			oz
15	Load Test	After test meet item 9 and 10	White noise	0.03 W.	5 Hours
16	Distortion	% MAX			Hz W.
17	Heat Test	After test meet item 9 and 10	65 $\pm$ 2 $\pm^{\circ}$ C	20-50 %R.H.	5 Hours
18	Humidity Test	After test meet item 9 and 10	40 $\pm$ 2 $\pm^{\circ}$ C	90-95 %R.H.	5 Hours

PART NO.	GC0302M	UNITS:	mm
DRAWN BY:		PAGE NO:	1 of 2

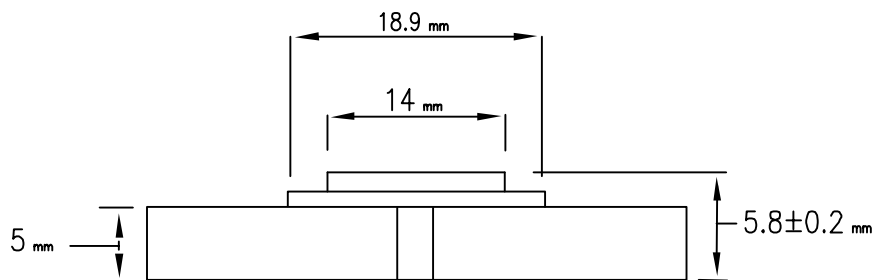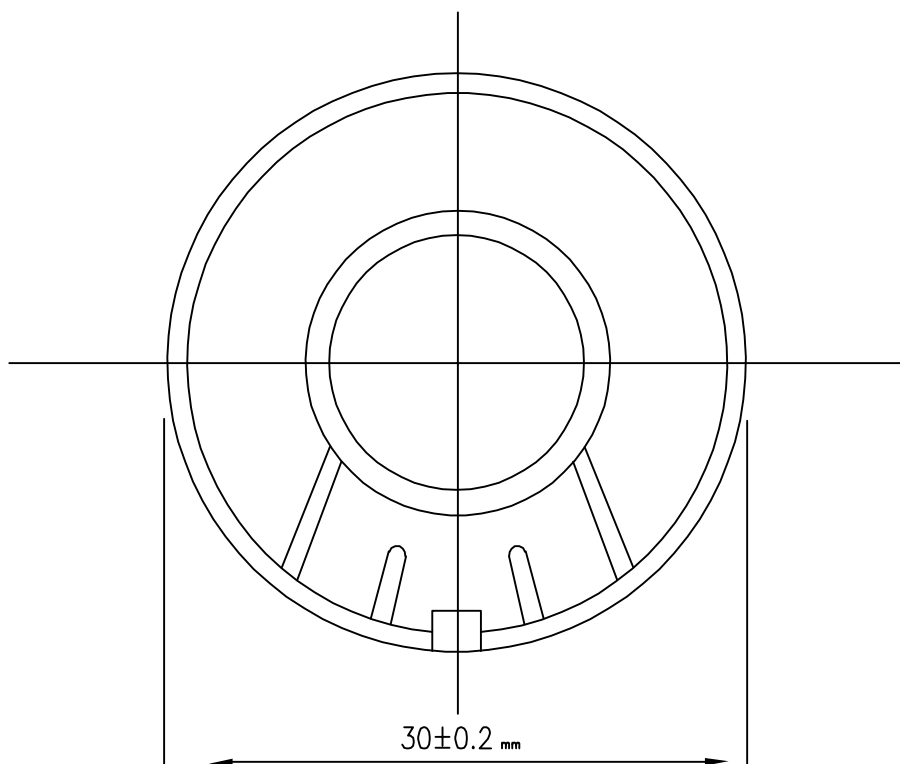

CUI INC

9615 SW Allen, Suite 103
Beaverton, OR 97005
Phone: (503) 643-4899
800-275-4899
Fax: (503) 372-1266
Website: www.cui.com

TITLE:

PART NO.

GC0302M

UNITS:

mm

DRAWN BY:

Page No.

2 of 2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[CUI Inc.:](#)

[GC0302M](#)