


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

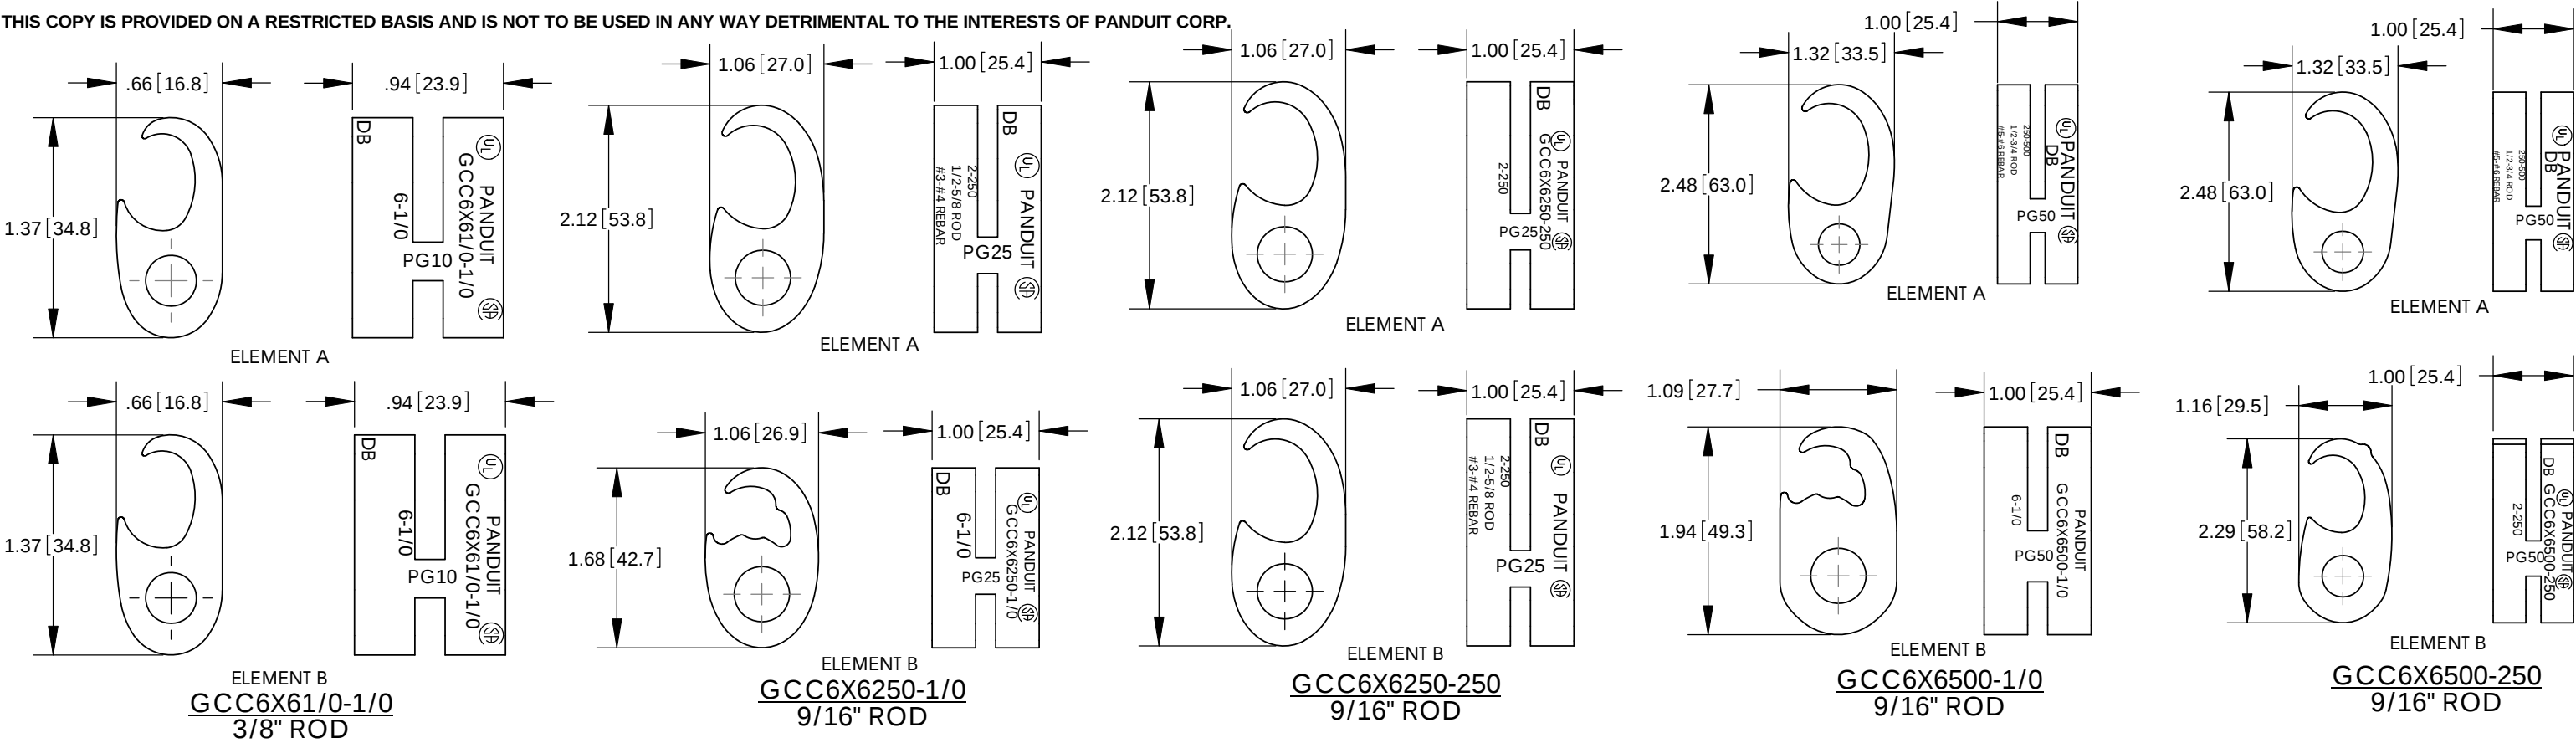

PANDUIT PART NUMBER	ELEMENT A - AWG [mm]			ELEMENT B - AWG [mm]	PANDUIT COLOR CODE	PANDUIT DIE INDEX NO.	STD. PKG QTY
	COPPER CABLE	GROUND ROD	REBAR	COPPER CABLE			
GCC6X61/0-1/0	#6 SOL - 1/0 STR. [16-50 SQ. mm]	N/A	N/A	#6 SOL - 1/0 STR [16-50 SQ mm]	RED	PG10	1
GCC6X6250-1/0	2 SOL - 250 kcmil [35-120 SQ. mm]	1/2"-5/8" ROD [12.7-15.9 mm]	3/8"-1/2"; #3-#4 REBAR [9.5-12.7mm; #10M-#13M REBAR]	#6 SOL - 1/0 STR [16-50 SQ mm]	BLACK	PG25	1
GCC6X6250-250	2 SOL - 250 kcmil [35-120 SQ. mm]	1/2"-5/8" ROD [12.7-15.9 mm]	3/8"-1/2"; #3-#4 REBAR [9.5-12.7mm; #10M-#13M REBAR]	2 SOL - 250 kcmil [35-120 SQ mm]			
GCC6X6500-1/0	250 - 500 kcmil [150-240 SQ. mm]	1/2"-3/4" ROD [12.7-19.1 mm]	5/8"-3/4"; #5-#6 REBAR [15.9-19.1mm; #16M-#19M REBAR]	#6 SOL - 1/0 STR [16-50 SQ mm]	BLUE	PG50	1
GCC6X6500-250	250 - 500 kcmil [150-240 SQ. mm]	1/2"-3/4" ROD [12.7-19.1 mm]	5/8"-3/4"; #5-#6 REBAR [15.9-19.1mm; #16M-#19M REBAR]	2 SOL - 250 kcmil [35-120 SQ mm]			

NOTES

- DIMENSIONS IN PARENTHESIS ARE MILLIMETERS.
- UL 467 LISTED AND CSA 22.2 CERTIFIED FOR GROUNDING & BONDING SUITABLE FOR DIRECT BURIAL IN EARTH OR CONCRETE WHEN CRIMPED WITH PANDUIT OR INDUSTRY STANDARD CRIMPING TOOLS & PANDUIT DIES.
- ENHANCED CRIMP PROCESS WITH PATENTED TECHNOLOGY MEETS IEEE STD 837 - 2002.
- PRE-APPLIED ANTIOXIDANT COMPOUND ENSURES A HIGH QUALITY MECHANICAL AND ELECTRICAL BOND, SPEEDING INSTALLATION.
- CABLE TIES ARE PROVIDED WITH THE TAPS TO RETAIN WIRES IN POSITION DURING CRIMPING.

02	12/10	JHNU	JHNU	ADDED AGENCY LOGOS	N41749BC-C41749	FLD	FLD
01	3/09	JHNU	RGB	REV'D MARKING ON ELEMENT A OF GCC6X6250-1/0, ELEMENT B OF GCC6X6250-250, ELEMENT A OF GCC6X6500-1/0, ELEMENT A OF GCC6X6500-250 TO SHOW REBAR INFO, REMOVED * NOTE			
00	4/08	JHNU	RGB	DRAWING RELEASED			
REV	DATE	BY	CHK	DESCRIPTION	ECN	-R	SUP



DB
RATED



PANDUIT CORP. TINLEY PARK, ILLINOIS

**6X6 GROUNDING CONNECTORS
CUSTOMER DRAWING**

UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE:		UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION	
(.X) ± ---	(.XXX) ± .005	SCALE NONE	
(.XX) ± .03	ANGLES ± 1°	DRAWING NO / CAD FILE	
DRAWN BY JHNU		C41749_02	
DATE 4/08		DWG B SIZE	
CHK'D			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[GCC6X6250-250](#)